



---

**V40**

---

---

# **OWNERS MANUAL**

---

WEB EDITION







## DEAR VOLVO OWNER

THANK YOU FOR CHOOSING VOLVO

We hope you will enjoy many years of driving pleasure in your Volvo. The car has been designed for the safety and comfort of you and your passengers. Volvo is one of the safest cars in the world. Your Volvo has also been designed to satisfy all current safety and environmental requirements.

In order to increase your enjoyment of the car, we recommend that you familiarise yourself with the equipment, instructions and maintenance information contained in this owner's manual.





## 00 Introduction

Important information.....	6
Volvo and the environment.....	10

# 00



## 01 Safety

Seatbelts .....	16
Airbags.....	19
Activating/deactivating the airbag*.....	22
Side airbags (SIPS bags) .....	24
Inflatable Curtain (IC) .....	25
WHIPS .....	26
When the systems deploy .....	28
Safety mode.....	29
Pedestrian airbag (Pedestrian Airbag).....	30
Child safety.....	32

# 01



## 02 Locks and alarm

Remote control key/key blade.....	44
Battery replacement, remote control key/PCC*.....	50
Keyless*.....	52
Locking/unlocking.....	56
Child safety locks.....	62
Alarm*.....	63

# 02



### 03 Your driving environment

Instruments and controls.....	68
Volvo Sensus .....	80
Key positions.....	81
Seats.....	83
Steering wheel.....	88
Lighting.....	89
Wipers and washing.....	101
Windows, rearview and door mirrors.....	104
Compass*.....	110
Alcolock*.....	111
Starting the engine.....	115
Starting the engine – external battery.....	117
Gearboxes.....	118
Start/Stop*.....	125
Foot brake.....	131
Parking brake.....	133
HomeLink® *.....	134



### 04 Driver support

DSTC – Stability and traction control system.....	140
Road sign information - RSI*.....	143
Speed limiter*.....	146
Cruise control*.....	148
Adaptive cruise control*.....	150
Distance Warning*.....	161
City Safety™.....	164
Collision Warning with Auto Brake & Pedestrian Detection*.....	170
Driver Alert System*.....	178
Driver Alert System - DAC*.....	179
Driver Alert System - Lane Keeping Aid*.....	182
Park assist syst*.....	186
Park assist camera*.....	189
Park Assist Pilot - PAP*.....	193
BLIS and CTA*.....	198



### 05 Comfort and driving pleasure

Menus and messages.....	204
Menu source MY CAR.....	207
Climate control.....	215
Engine and passenger compartment heater*.....	226
Additional heater*.....	230
Trip computer.....	232
Adapting driving characteristics.....	240
Comfort inside the passenger compartment.....	241



## 06 Infotainment system

General information on infotainment.....	248
Radio.....	259
Media player.....	266
External audio source via AUX/USB* input.....	270
Media Bluetooth®* .....	273
Bluetooth® handsfree*.....	276
Voice recognition* mobile phone.....	285
TV*.....	289
Remote control* .....	292



## 07 During your journey

Recommendations during driving.....	296
Refuelling.....	299
Fuel.....	301
Loading.....	304
Cargo area.....	307
Driving with a trailer.....	309
Towing and recovery.....	315



## 08 Wheels and tyres

General .....	320
Changing wheels .....	324
Tyre pressure .....	328
Warning triangle and first-aid kit*.....	329
Emergency puncture repair (TMK)* .....	330



## 09 Maintenance and service

Engine compartment.....	338
Lamps.....	345
Wiper blades and washer fluid.....	352
Battery.....	355
Fuses.....	359
Car care.....	368



## 10 Specifications

Type designations.....	376
Dimensions and weights.....	378
Engine specifications.....	382
Engine oil.....	383
Fluids and lubricants.....	385
Fuel.....	387
Wheel and tyres, dimensions and pressure .....	391
Electrical system.....	393
Type approval.....	394
Licenses.....	403
Symbols in the display.....	406



## 11 Alphabetical Index

Alphabetical Index.....	410
-------------------------	-----



## Important information

### Reading the Owner's Manual

#### Introduction

A good way of getting to know your new car is to read the owner's manual, ideally before your first journey. This will give you the opportunity to familiarise yourself with new functions, to see how best to handle the car in different situations, and to make the best use of all the car's features. Please pay attention to the safety instructions contained in the manual.

The specifications, design features and illustrations in this owner's manual are not binding. We reserve the right to make modifications without prior notice.

© Volvo Car Corporation

#### Option

All types of option/accessory are marked with an asterisk\*.

In addition to standard equipment, this manual also describes options (factory fitted equipment) and certain accessories (retrofitted extra equipment).

The equipment described in the owner's manual is not available in all cars - they have different equipment depending on adaptations for the needs of different markets and national or local laws and regulations.

In the event of uncertainty over what is standard or an option/accessory, contact a Volvo dealer.

#### Special texts



#### WARNING

Warning texts appear if there is a risk of injury.



#### IMPORTANT

"Important" texts appear if there is a risk of damage.



#### NOTE

NOTE texts give advice or tips that facilitate the use of features and functions for example.

#### Footnote

There is footnote information in the owner's manual that is located at the bottom of the page. This information is an addition to the text that it refers to via a number. If the footnote refers to text in a table then letters are used instead of numbers for referral.

#### Message texts

Text messages can be shown in the combined instrument panel and in the screen.

These text messages are highlighted in the owner's manual by means of the text being slightly larger and printed in grey. Examples of this are in menu texts and message texts in the screen (e.g. **Audio settings**).

#### Decals

The car contains different types of decal which are designed to convey important information in a simple and clear manner. The decals in the car have the following descending degree of importance for the warning/information.

#### Warning for personal injury




Black ISO symbols on yellow warning field, white text/image on black message field. Used to indicate the presence of danger



## Important information

which, if the warning is ignored, may result in serious personal injury or fatality.

### Risk of property damage

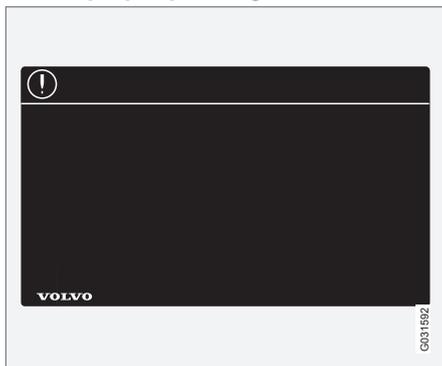

White ISO symbols and white text/image on black or blue warning field and message field. Used to indicate the presence of danger which, if the warning is ignored, may result in damage to property.

### Information



White ISO symbols and white text/image on black message field.

### NOTE

It is not intended that the decals illustrated in the owner's manual should be exact replicas of those in the car. They are included to show their approximate appearance and location in the car. The information that applies to your particular car is available on the respective decals for your car.

### Procedure lists

Procedures where action must be taken in a certain sequence are numbered in the owner's manual.

- 1 When there is a series of illustrations for step-by-step instructions each step is numbered in the same way as the corresponding illustration.
- A There are numbered lists with letters adjacent to the series of illustrations where the order of the instructions is not significant.
- Arrows appear numbered and unnumbered and are used to illustrate a movement.
- Arrows with letters are used to clarify a movement when the reciprocal order is of no relevance.

If there is no series of illustrations for step-by-step instructions then the different steps are numbered with normal numbers.

### Position lists

- 1 Red circles containing a number are used in overview images where different components are pointed out. The number recurs in the position list featured in connection with the illustration that describes the item.



## Important information

### Bulleted lists

A bulleted list is used when there is a list of points in the owner's manual.

Example:

- Coolant
- Engine oil

### Images

The manual's images are sometimes schematic and may deviate from the car's appearance depending on equipment level and market.

### To be continued

▶▶ This symbol is located furthest down to the right when a section continues on the following page.

### Recording data

Your vehicle contains a number of computers whose function is to continuously check and monitor the vehicle's operation and functionality. Some of the computers can record information during normal driving if they detect an error. In addition, information is recorded in the event of a collision or incident. Parts of the recorded information are required so that technicians can diagnose and rectify faults in the vehicle during servicing and maintenance and so that Volvo can

fulfil legal requirements and other regulations. In addition to this, the information is used for research purposes by Volvo in order to continually develop quality and safety, as the information can contribute to a better understanding of the factors that cause accidents and injuries. The information includes details of the status and functionality of various systems and modules in the vehicle with regard to engine, throttle, steering and brake systems, amongst other things. This information may include details regarding the way the driver drives the vehicle, such as vehicle speed, brake and accelerator pedal use, steering wheel movement and whether or not the driver and passengers have used their seatbelts. For the reasons given this information may be stored in the vehicle's computers for a certain length of time, but also as a result of a collision or incident. This information may be stored by Volvo as long as it can help to further develop and further enhance safety and quality and as long as there are legal requirements and other regulations that Volvo needs to consider.

Volvo will not contribute to the above-described information being disclosed to third parties without the vehicle owner's consent. However, due to national legislation and regulations Volvo may be required to disclose such information to authorities such as police

authorities, or others who may assert a legal right to have access to it.

To be able to read and interpret the information recorded by the computers in the vehicle requires special technical equipment that Volvo, and workshops that have entered into agreements with Volvo, have access to. Volvo is responsible that the information, which is transferred to Volvo during servicing and maintenance, is stored and handled in a secure manner and that the handling complies with applicable legal requirements. For further information - contact a Volvo dealer.

### Accessories and extra equipment

The incorrect connection and installation of accessories can negatively affect the car's electrical system. Certain accessories only function when their associated software is installed in the car's computer system. Volvo therefore recommends that you always contact an authorised Volvo workshop before installing accessories which are connected to or affect the electrical system.



## Important information

### Change of ownership for cars with Volvo On Call\*

Volvo On Call is a supplemental service that consists of safety, security and comfort services. If the car has Volvo On Call and there is a change of owner, it is very important that these services are discontinued so that the former owner cannot access the services in the car. Contact an authorised Volvo dealer in the event of a change of ownership.

### Information on the Internet

At [www.volvocars.com](http://www.volvocars.com) there is further information concerning your car.

A QR code reader is required to read the QR code, which is available as a supplemental program for several mobile phones. The QR code reader can be downloaded from App Store or Google Play.



QR code



## Volvo and the environment

### Volvo Cars' environmental philosophy



Environmental care is one of Volvo Car Corporation's core values which influence all operations. We also believe that our customers share our consideration for the environment.

Your Volvo complies with strict international environmental standards and is also manufactured in one of the cleanest and most resource-efficient plants in the world. Volvo Car Corporation has global ISO certification, which includes the environmental standard ISO 14001 covering all factories and several of our other units. We also set requirements

for our partners so that they work systematically with environmental issues.

#### Fuel consumption

Volvo cars have competitive fuel consumption in each of their respective classes. Lower fuel consumption generally results in lower emission of the greenhouse gas, carbon dioxide.

It is possible for the driver to influence fuel consumption. For more information read under the heading, **Reducing environmental impact**.

#### Efficient emission control

Your Volvo is manufactured following the concept "Clean inside and out" – a concept that encompasses a clean interior environment as well as highly efficient emission control. In many cases the exhaust emissions are well below the applicable standards.

#### Clean air in the passenger compartment

A passenger compartment filter prevents dust and pollen from entering the passenger compartment via the air intake.



## Volvo and the environment

A sophisticated air quality system, IAQS\* (Interior Air Quality System) ensures that the incoming air is cleaner than the air in the traffic outside.

The system consists of an electronic sensor and a carbon filter. The incoming air is monitored continuously and if there is an increase in the level of certain unhealthy gases such as carbon monoxide then the air intake is closed. Such a situation may arise in heavy traffic, queues and tunnels for example.

The entry of nitrous oxides, ground-level ozone and hydrocarbons is prevented by the carbon filter.

### Interior

The interior of a Volvo is designed to be pleasant and comfortable, even for people with contact allergies and for asthma sufferers. Extreme attention has been given to choosing environmentally-compatible materials.

### Volvo workshops and the environment

Regular maintenance creates the conditions for a long service life and low fuel consumption for your car. In this way you contribute to a cleaner environment. When Volvo's workshops are entrusted with the service and maintenance of your car it becomes part of our system. Volvo makes clear demands regarding the way in which our workshops are designed in order to prevent spills and

discharges into the environment. Our workshop staff have the knowledge and the tools required to guarantee good environmental care.

### Reducing environmental impact

You can easily help reduce environmental impact - here are a few tips:

- Avoid letting the engine idle - switch off the engine when stationary for longer periods. Pay attention to local regulations.
- Drive economically - think ahead.
- Perform service and maintenance in accordance with the owner's manual's instructions - follow the Service and Warranty Booklet's recommended intervals.
- If the car is equipped with an engine block heater\*, use it before starting from cold - it improves starting capacity and reduces wear in cold weather and the engine reaches normal operating temperature more quickly, which lowers consumption and reduces emissions.
- High speed increases consumption considerably due to increased wind resistance - a doubling of speed increases wind resistance 4 times.
- Always dispose of environmentally hazardous waste, such as batteries and oils, in an environmentally safe manner. Consult

a workshop in the event of uncertainty about how this type of waste should be discarded - an authorised Volvo workshop is recommended.

Following this advice can save money, the planet's resources are saved, and the car's durability is extended. For more information and further advice, see the pages 296 and 387.

### Recycling

As a part of Volvo's environmental work, it is important that the car is recycled in an environmentally sound manner. Almost all of the car can be recycled. The last owner of the car is therefore requested to contact a dealer for referral to a certified/approved recycling facility.

### The owner's manual and the environment

The Forest Stewardship Council® symbol shows that the paper pulp in this publication comes from FSC® certified forests or other controlled sources.

\* Option/accessory, for more information, see Introduction.



## Volvo and the environment






Seatbelts .....	16
Airbags.....	19
Activating/deactivating the airbag* .....	22
Side airbags (SIPS bags) .....	24
Inflatable Curtain (IC) .....	25
WHIPS .....	26
When the systems deploy .....	28
Safety mode.....	29
Pedestrian airbag (Pedestrian Airbag).....	30
Child safety.....	32



# 01

SAFETY

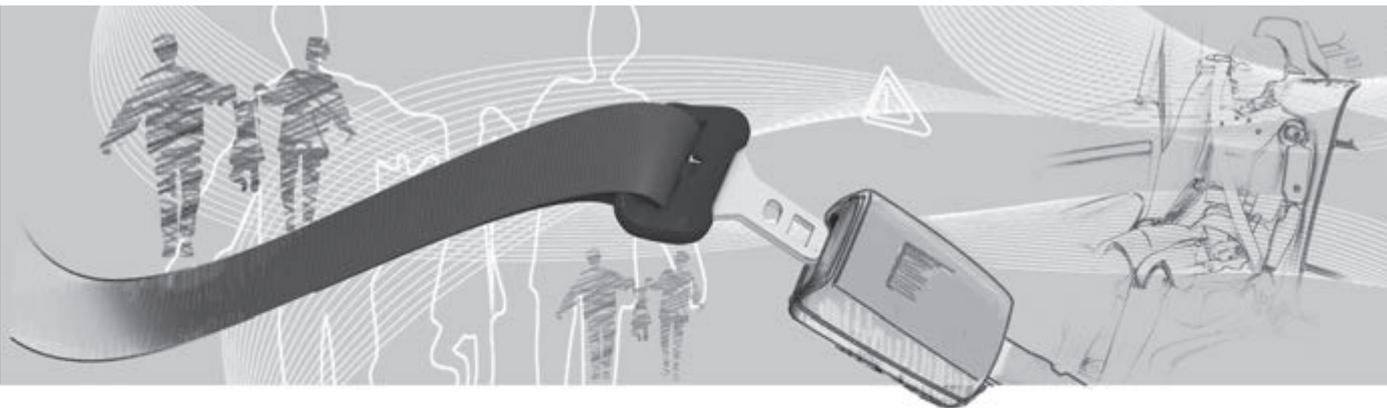



## Seatbelts

### General information



Heavy braking can have serious consequences if the seatbelts are not used. Ensure that all passengers use their seatbelts.

It is important that the seatbelt lies against the body so it can provide maximum protection. Do not lean the backrest too far back. The seatbelt is designed to protect in a normal seating position.

### Putting on a seatbelt

Pull the belt out slowly and secure it by pressing its locking tab into the seatbelt buckle. A loud "click" indicates that the belt has locked.



Correctly fitted seatbelt.



Incorrectly fitted seatbelt. The belt must rest on the shoulder.



Seatbelt height adjustment. Press the button and move the belt vertically. Position the belt as high as possible without it chafing against your throat.

The locking tab at the centre rear seat only fits into the intended seatbelt buckle.

### Releasing the seatbelt

Press the red button on the seatbelt buckle and then let the belt retract. If the seatbelt does not retract fully, feed it in by hand so that it does not hang loose.

**The seatbelt locks and cannot be withdrawn:**

- if it is pulled out too quickly
- during braking and acceleration
- if the car leans heavily.



## Seatbelts

### Make sure that you:

- do not use clips or anything else that can prevent the seatbelt from fitting properly
- ensure that the seatbelt is not twisted or caught on anything
- the hip strap must be positioned low down (not over the abdomen)
- tension the hip strap over the lap by pulling the diagonal shoulder belt up towards the shoulder.

### WARNING

The seatbelts and airbags interact. If a seatbelt is not used or is used incorrectly, this may diminish the protection provided by the airbag in the event of a collision.

### WARNING

Each seatbelt is designed for only one person.

### WARNING

Never modify or repair the seatbelts yourself. Volvo recommends that you contact an authorised Volvo workshop.

If the seatbelt has been subjected to a major load, such as in conjunction with a collision, the entire seatbelt must be replaced. Some of the seatbelt's protective properties may have been lost even if the seatbelt does not appear damaged. The seatbelt must also be replaced if it shows signs of wear or damage. The new seatbelt must be type-approved and designed for installation at the same location as the replaced seatbelt.

### Seatbelts and pregnancy



The seatbelt should always be worn during pregnancy. But it is crucial that it be worn in the correct way. The diagonal section should wrap over the shoulder then be routed between the breasts and to the side of the abdomen.

The lap section should lay flat over the thighs and as low as possible under the abdomen. – It must never be allowed to ride upward. Remove the slack from the seatbelt and ensure that it fits as close to the body as possible. In addition, check that there are no twists in the seatbelt.

As the pregnancy progresses, pregnant drivers should adjust their seats and steering wheel such that they can easily maintain control of the vehicle as they drive (which means that they must be able to easily operate the foot pedals and steering wheel). The aim should be to position the seat with as large a distance as possible between abdomen and steering wheel.



## Seatbelts

### Seatbelt reminder



Unbelted occupants will be reminded to fasten their seatbelts by means of an audio and visual reminder. The audio reminder is speed dependent, and in some cases time dependent. The visual reminder is located in the roof console and in the combined instrument panel.

Child seats are not covered by the seatbelt reminder system.

### Rear seat

The seatbelt reminder in the rear seat has two subfunctions:

- Provides information on which seatbelts are being used in the rear seat. A message appears in the combined instrument panel when the seatbelts are in use, or if one of the rear doors has been opened. The message is acknowledged automatically after approximately 30 seconds driving or after pressing the indicator stalk's **OK** button. If anyone is unbelted then the message can only be acknowledged manually by pressing the indicator stalk's **OK** button.
- Provides a warning if one of the rear seatbelts is unfastened during travel. This warning takes the form of a message in the combined instrument panel along with the audio/visual signal. The warning stops when the seatbelt is re-fastened, or it can also be acknowledged manually by pressing the **OK** button.

The combined instrument panel's information display, see page 71, shows which seatbelts are in use. This information is always available.

### Seatbelt tensioner

The seatbelts on the driver's side, the passenger side and at the outer rear seats are fitted with seatbelt tensioners. A mechanism in the seatbelt tensioner tightens the seatbelt in the event of a sufficiently violent collision. The seatbelt then provides more effective restraint for the occupants.


 **WARNING**

Never insert the tongue of the passenger's seatbelt into the buckle on the driver's side. Always insert the tongue of the seatbelt into the buckle on the correct side. Do not make any damages on seatbelts nor insert any foreign objects into a buckle. The seatbelts and buckles would then possibly not function as intended in the event of a collision. There is a risk of serious injury.




## Airbags

### Warning symbol in combined instrument panel

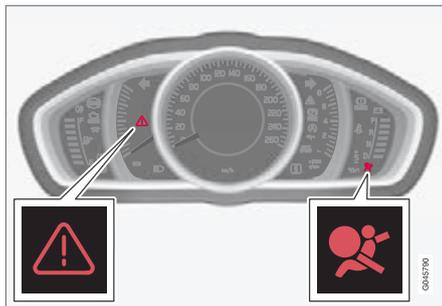

Analogue combined instrument panel.

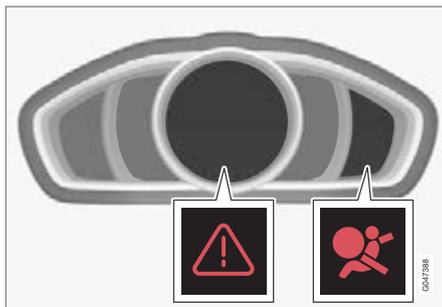

Digital combined instrument panel.

The warning symbol in the combined instrument panel is switched on with the remote


control key in key position II, fault tracing is performed each time the ignition is switched on. The symbol clears after approx. 6 seconds provided the airbag system is fault-free.

The warning symbol is shown if a fault is detected during fault tracing or if a system has been activated. Where required, the warning symbol is shown together with a message in the information display. If the warning symbol malfunctions, the warning triangle illuminates and **SRS airbag Service required** or **SRS airbag Service urgent** appears in the display. Volvo recommends that you contact an authorised Volvo workshop immediately.


#### WARNING

If the warning symbol for the airbag system remains illuminated or illuminates while driving, it means that the airbag system does not have full functionality. The symbol indicates a fault in the airbag system, the belt tensioner system, SIPS, the IC system or some other fault in the system. Volvo recommends that you contact an authorised Volvo workshop immediately.

### Airbag system

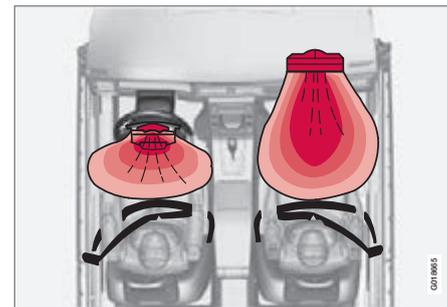

Airbag system viewed from above, left-hand-drive car.

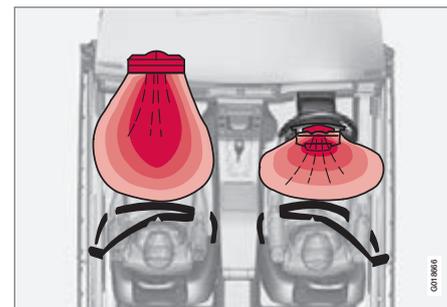

Airbag system viewed from above, right-hand-drive car.



## Airbags

The system consists of airbags and sensors. A sufficiently violent collision trips the sensors and the airbag(s) are inflated and become hot. The airbag cushions the initial collision impact for the occupant. The airbag deflates when compressed by the collision. When this occurs, smoke escapes into the car. This is completely normal. The entire process, including inflation and deflation of the airbag, occurs within tenths of a second.

### WARNING

Volvo recommends that you contact an authorised Volvo workshop for repair. Defective work in the airbag system could cause malfunction and result in serious personal injury.


### NOTE

The detectors react differently depending on the nature of the collision and whether or not the seatbelts are fastened. Applies to all seatbelt positions apart from centre seat rear.

It is therefore possible that only one (or none) of the airbags may inflate in a collision. The detectors sense the force of the collision on the vehicle and the action is adapted accordingly so that one or more airbags are deployed.

### Airbags on the driver's side

The car has two airbags to supplement the protection afforded by the seatbelt on the driver's side. One of the airbags is folded up in the centre of the steering wheel (see the illustration on page 19); the steering wheel is labelled **AIRBAG**.

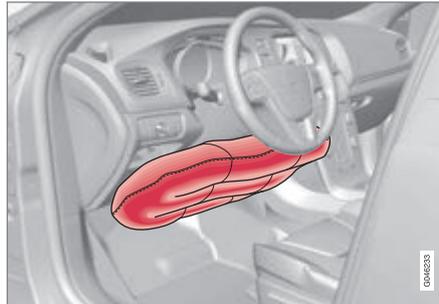

*Knee airbag on the driver's side in a left-hand drive car.*

The second airbag (at knee level) is fitted in the lower part of the instrument panel on the driver's side; this panel is labelled **AIRBAG**.

### WARNING

The seatbelts and airbags interact. If the belt is not used or is used incorrectly, this may diminish the protection provided by the airbags in the event of a collision.

### Passenger airbag



*Location of the front passenger airbag in a left-hand drive car.*



*Location of the front passenger airbag in a right-hand drive car.*



The car has an airbag to supplement the protection afforded by the seatbelt on the passenger side. It is folded up into a compartment above the glovebox. Its cover panel is marked **AIRBAG**.

 **WARNING**

The seatbelts and airbags interact. If the belt is not used or is used incorrectly, this may diminish the protection provided by the airbag in the event of a collision.

To minimise the risk of injury if the airbag deploys, passengers must sit as upright as possible with their feet on the floor and backs against the backrest. Seatbelts must be secured.

 **WARNING**

Do not put objects in front of or above the dashboard where the passenger airbag is located.

 **WARNING**

Never place a child in a child seat or on a booster cushion in the front seat if the airbag is activated.

Never allow anybody to stand or sit in front of the front passenger seat.

No one shorter than 140 cm should ever sit in the front passenger seat if the airbag is activated.

Failure to follow the advice given above can endanger life.



## Activating/deactivating the airbag\*

### Key switch off - PACOS\*

#### General information

The airbag for the front passenger seat can be deactivated if the car is equipped with a switch, PACOS (Passenger Airbag Cut Off Switch). For information on how to activate/deactivate, see under the heading Activating/deactivating.

#### Key switch off/switch

The switch for the passenger airbag (PACOS) is located on the passenger end of the instrument panel and is accessible when the passenger door is open (see under the heading below, Activating/deactivating).

Check that the switch is in the required position. The remote control key's key blade should be used to change position.

For information on the key blade, see page 48.

#### WARNING

Failure to follow the advice given above can endanger the lives of passengers in the car.

#### WARNING

If the car is equipped with a front passenger airbag, but does not have a PACOS switch (Passenger Airbag Cut Off Switch), then the airbag will always be activated.


#### WARNING

Never place a child in a child seat or on a booster cushion in the front seat if the airbag is activated and the symbol  in the roof console is illuminated. Failure to follow this advice could endanger the life of the child.

#### WARNING

Do not allow anyone to sit in the front passenger seat if the message in the roof console (see page 23) indicates that the airbag is deactivated, at the same time as the warning symbol for the airbag system is shown in the combined instrument panel. This indicates that there has been a severe malfunction. Visit a workshop as soon as possible. Volvo recommends that you contact an authorised Volvo workshop.

### Activating/deactivating

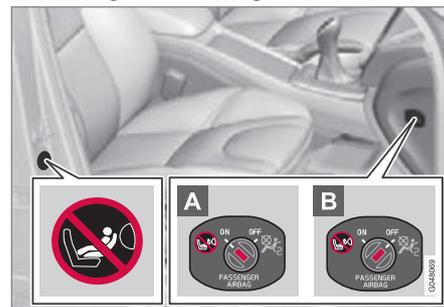

Position of airbag label plus switch.

- A** The airbag is activated. With the switch in this position, persons taller than 140 cm can sit in the front passenger seat, but never children in a child seat or on a booster cushion.
- B** The airbag is deactivated. With the switch in this position, children in a child seat or on a booster cushion can sit in the front passenger seat, but never persons taller than 140 cm.



## Activating/deactivating the airbag\*

### **!** WARNING

#### **Activated airbag** (passenger seat):

Never place a child in a child seat or on a booster cushion on the front passenger seat when the airbag is activated. This applies to everyone shorter than 140 cm.

#### **Deactivated airbag** (passenger seat):

No one taller than 140 cm should ever sit in the front passenger seat when the airbag is deactivated.

Failure to follow the advice given above can endanger life.

### **i** NOTE

When the remote control key is in key position **II** the warning symbol for the airbag is shown in the combined instrument panel for approx. 6 seconds (see page 19).

Following which, the indicator in the roof console is illuminated showing the correct status for the front passenger seat airbag. For more information about the different key positions for the remote control key, see page 81.


#### Activated airbag



*Indicator showing that the passenger airbag is activated.*

A text message and a warning symbol in the roof console indicate that the airbag for the front passenger seat is activated (see preceding illustration).

#### Deactivated airbag

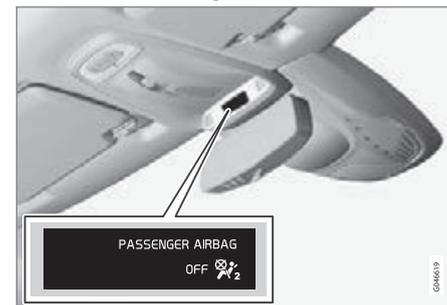

*Indicator showing that the passenger airbag is deactivated.*

A text message and a symbol in the roof console indicate that the airbag for the front passenger seat is deactivated (see preceding illustration).

\* Option/accessory, for more information, see Introduction.



## Side airbags (SIPS bags)


### Side airbag




In a side impact collision a large proportion of the collision force is transferred by the SIPS (Side Impact Protection System) to beams, pillars, the floor, the roof and other structural parts of the body. The side airbags at the driver's and front passenger seats protect the chest area and the hip and are an important part of the SIPS.

The SIPS bag system consists of two main components, side airbag and sensors. The side airbags are located in the front seat backrests.

### Location

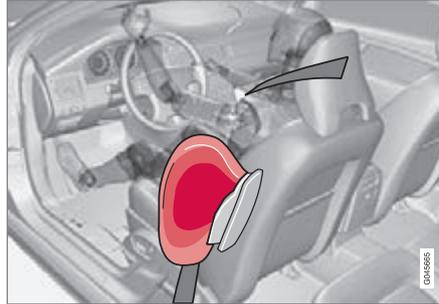

*Driver's seat, left-hand drive.*

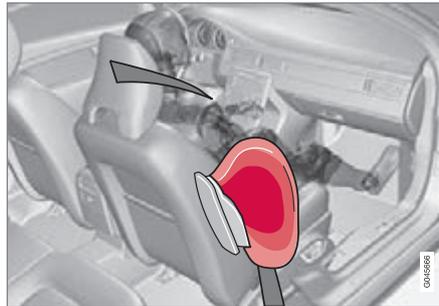

*Front passenger seat, left-hand drive.*

The SIPS bag system consists of side airbags and sensors. A sufficiently violent collision trips the sensors and the side airbags are inflated. The airbag inflates between the

occupant and the door panel and thereby cushions the initial impact. The airbag deflates when compressed by the collision. The side airbag is normally only deployed on the side of the collision.

### Child seats and side airbags

The protection provided by the car to children seated in a child seat or on a booster cushion is not diminished by the side airbag.

### WARNING

- Volvo recommends that repairs are only carried out by an authorised Volvo workshop. Defective work in the SIPS-bag system could cause malfunction and result in serious personal injury.
- Do not put objects in the area between the outside of the seat and the door panel, since this area is required by the side airbag.
- Volvo recommends the use only of car seat covers approved by Volvo. Other seat covers may impede the operation of the side airbags.
- Side airbags are a supplement the seatbelts. Always use a seatbelt.

**Inflatable Curtain (IC)****Properties**

The inflatable curtain (IC) is a part of the SIPS system. It is fitted in the headlining along both sides of the roof and protects the car's occupants sitting in the outer seats. A sufficiently violent collision trips the sensors and the inflatable curtain is inflated. The inflatable curtain helps to prevent the driver and passengers from striking their heads on the inside of the car during a collision.

**WARNING**

Never hang or attach heavy items onto the handles in the roof. The hook is only designed for light clothing (not for solid objects such as umbrellas for example).

Do not screw or install anything onto the car's headlining, door pillars or side panels. This could compromise the intended protection. Volvo recommends that you only ever use Volvo genuine parts that are approved for placement in these areas.

**WARNING**

Do not load the car higher than 50 mm under the top edge of the windows in the doors. Otherwise, the intended protection of the inflatable curtain, which is concealed in the headlining, may be compromised.

**WARNING**


The inflatable curtain is a supplement to the seatbelts.

Always use a seatbelt.



## WHIPS

### Protection against whiplash injury – WHIPS

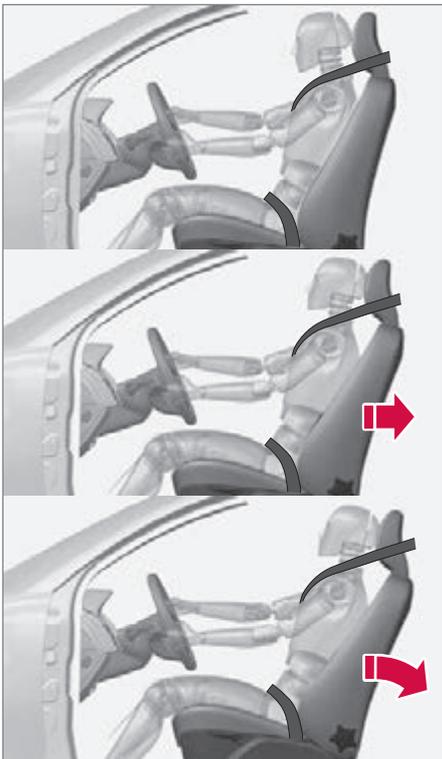

The whiplash protection system (WHIPS) consists of energy absorbing backrests and specially designed head restraints in the front seats. The system is actuated by a rear-end collision, where the angle and speed of the collision, and the nature of the colliding vehicle all have an influence.

#### WARNING

The WHIPS system is a supplement to the seatbelts. Always use a seatbelt.

#### Properties of the seat

When the WHIPS system is deployed, the front seat backrests are lowered backward to alter the seating position of the driver and front seat passenger. This reduces the risk of whiplash injury.

#### WARNING

Never modify or repair the seat or WHIPS system yourself. Volvo recommends that you contact an authorised Volvo workshop.

#### WHIPS system and child seats/booster cushions

The protection provided by the car to children seated in a child seat or on a booster cushion is not diminished by the WHIPS system.

### Correct seating position

For the best possible protection, the driver and front seat passenger should sit in the centre of the seat with as little space as possible between the head and the head restraint.

### Do not obstruct the WHIPS system



*Do not leave any objects on the floor behind the driver's seat/passenger seat that may prevent the WHIPS system from functioning.*

#### WARNING

Do not squeeze rigid objects between the rear seat cushion and the front seat backrest. Make sure you do not obstruct the function of the WHIPS system.



*Do not place objects on the rear seat that may prevent the WHIPS system from functioning.*

### WARNING

If a rear seat backrest is folded down, the corresponding front seat must be moved forward so that it does not touch the folded backrest.

### WARNING

If a seat has been subjected to extreme forces, such as due to a rear-end collision, the WHIPS system must be checked. Volvo recommends that it is checked by an authorised Volvo workshop.

Part of the WHIPS system's protective capacity may have been lost even if the seats appear to be undamaged.

Volvo recommends that you contact an authorised Volvo workshop to have the system checked even after a minor rear-end collision.



## When the systems deploy

### When the systems deploy

System	Triggered
Seatbelt tensioner, front seat	In the event of a frontal collision, and/or side-impact collision, and/or rear-end collision and/or overturning
Seatbelt tensioner, rear seat <sup>A</sup>	In a frontal collision and/or side-impact accident and/or overturning
Airbags (Steering wheel airbag, knee airbag, passenger airbag)	In a frontal collision <sup>B</sup>
Side airbags (SIPS)	In a side-impact accident <sup>B</sup>

System	Triggered
Inflatable Curtain IC	In the event of a side impact and/or overturning and/or some frontal collisions <sup>B</sup>
Whiplash protection WHIPS	In a rear-end collision

<sup>A</sup> There is no seatbelt tensioner at the centre rear seat.  
<sup>B</sup> The bodywork of the car could be greatly deformed in a collision without airbag deployment. A number of factors such as the rigidity and weight of the object hit, the speed of the car, the angle of the collision etc. affects how the different safety systems of the car are activated.

If the airbags have deployed, the following is recommended:

- Recovering the car. Volvo recommends that you have it conveyed to an authorised Volvo workshop. Do not drive with deployed airbags.
- Volvo recommends that you engage an authorised Volvo workshop to handle the replacement of components in the car's safety systems.
- Always contact a doctor.

### NOTE

The airbags and belt tensioner system are deployed only once during a collision.

 **WARNING**

The airbag system's control module is located in the centre console. If the centre console is drenched with water or other liquid, disconnect the battery cables. Do not attempt to start the car since the airbags may deploy. Recovering the car. Volvo recommends that you have it conveyed to an authorised Volvo workshop.


 **WARNING**

Never drive with deployed airbags. They can make steering difficult. Other safety systems may also be damaged. The smoke and dust created when the airbags are deployed can cause skin and eye irritation/injury after intensive exposure. In case of irritation, wash with cold water. The rapid deployment sequence and airbag fabric may cause friction and skin burns.




## Safety mode

## Driving after a collision

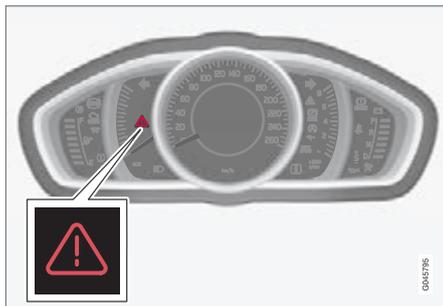

Warning symbol in analogue combined instrument panel.

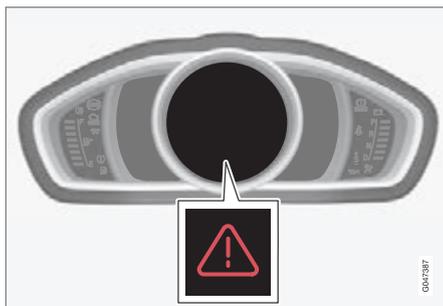

Warning symbol in digital combined instrument panel.

If the car is involved in a collision, the text **Safety mode See manual** may appear on the information display. This means that the car has reduced functionality. Safety mode is a protective state that is enforced when the collision may have damaged any of the car's vital functions, such as the fuel lines, sensors for one of the safety systems, or the brake system.

**Attempting to start the car**

First, check that no fuel is leaking from the car. There must be no smell of fuel either.

If everything seems normal and you have checked for indications of fuel leakage, you may attempt to start the car.

Remove the remote control key and open the driver's door. If a message is now shown to the effect that the ignition is on, press the start button. Then close the door and reinsert the remote control key. The car's electronics will now try to reset themselves to normal mode. Then try to start the car.

If the message **Safety mode See manual** is still shown on the display then the car must not be driven or towed, but a vehicle recovery service used instead. Even if the car appears to be driveable, hidden damage may make the car impossible to control once moving.

**Moving the car**

If **Normal mode** is shown after **Safety mode See manual** has been reset, the car can be moved carefully out of a dangerous position. Do not move the car further than necessary.

**WARNING**

Never attempt to repair your car or reset the electronics yourself if the car has been in safety mode. This could result in personal injury or the car not functioning as normal. Volvo recommends that you engage an authorised Volvo workshop to check and restore the car to normal status after **Safety mode See manual** has been displayed.

**WARNING**

Never, under any circumstances, attempt to restart the car if it smells of fuel when the **Safety mode See manual** message is displayed. Leave the car at once.

**WARNING**

If the car is in safety mode it must not be towed. It must be transported from its location. Volvo recommends that it is transported to an authorised Volvo workshop.



## Pedestrian airbag (Pedestrian Airbag)

### Properties



The airbag (Pedestrian Airbag) is fitted under the bonnet near the windscreen. In the event of a frontal collision with a pedestrian, the sensors in the front bumper react and the airbag inflates if required based on the force of the impact. The sensors are active at a speed of approx. 20-50 km/h and an ambient temperature between -20 and +70°C.

If the airbag is activated (Pedestrian Airbag)

- the rear part of the bonnet is raised and locked in this position
- the hazard warning flashers are activated
- the brake system is prepared for the upcoming emergency braking.

### WARNING

Do not fit any accessories or change anything in the front. Incorrect intervention at the front may cause incorrect function in the system and lead to serious injury and damage to the car.

Volvo recommends that genuine wiper arms are used and that you only use genuine parts for them.

### Handling after activation

If any of the other airbags in the passenger compartment were activated, the car remains in safety mode, see page 29.


If only the pedestrian airbag was activated:

1. Move the car to a safe location as close as possible.
2. Fold the airbag following the instructions under the next heading "Folding the airbag (Pedestrian Airbag)".
3. Seek the nearest workshop.

### WARNING

Volvo recommends that, after activation of the airbag, you contact an authorised Volvo workshop as soon as possible.

### Folding the airbag (Pedestrian Airbag)

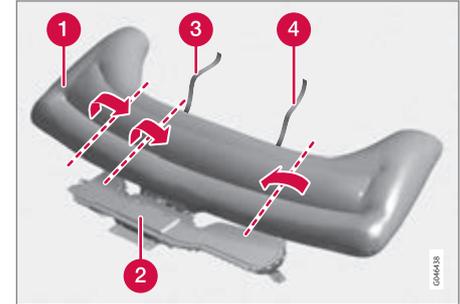

- 1 Airbag (Pedestrian Airbag)
- 2 Airbag housing
- 3 Velcro strap, passenger side
- 4 Velcro strap, driver's side

The airbag may feel warm and give off smoke. This is normal. Fold the airbag as follows:

1. Find the Velcro strap on the driver's side (4).
2. Gather the airbag fabric along its length on the driver's side. Then fold the gathered fabric towards the centre. Wind the Velcro strap (double sided) around as much fabric as possible and fasten it.

**Pedestrian airbag (Pedestrian Airbag)**

01

3. Press the rolled up portion of the airbag into the airbag housing (2).
4. Repeat steps 1-3 for the passenger side. It may be necessary to fold the gathered fabric twice on this side in order to wind the Velcro strap around it.
5. The airbag housing cover will be open slightly. This is completely normal.



## Child safety

### Children should sit comfortably and safely

Volvo recommends that children travel in rear-facing child seats until as late an age as possible, at least until 3-4 years of age, and then front-facing booster cushions/child seats until up to 10 years of age.

The position of a child in the car and the choice of equipment are dictated by the child's weight and size, for more information, see page 34.

#### **i** NOTE

Regulations regarding the placement of children in cars vary from country to country. Check what does apply.

Children of all ages and sizes must always sit correctly secured in the car. Never allow a child to sit on the knee of a passenger.

Volvo has child safety equipment (child seats, booster cushions & attachment devices) which is designed for your particular car. Using Volvo's child safety equipment provides you with optimum conditions for your child to travel safely in the car. Furthermore, the child safety equipment fits and is easy to use.

#### **i** NOTE

In the event of questions when fitting child safety products, contact the manufacturer for clearer instructions.

### Child seats



*Child seats and airbags are not compatible.*

#### **i** NOTE

When using child safety products it is important to read the installation instructions included.

#### **!** WARNING

Do not secure the straps of the child seat to the seat's horizontal adjustment bar, springs or the rails and beams under the seat. Sharp edges may damage the straps.

Look in the installation instructions for the child seat for the correct fitting.

### Location of child seats

You may place:

- a child seat/booster cushion on the passenger seat, provided the passenger airbag is not activated<sup>1</sup>.
- one or more child seats/booster cushions in the rear seat.

Always fit child seats/booster cushions in the rear seat if the passenger airbag is activated. If a child is sitting on the front passenger seat then he/she could suffer serious injury if the airbag deploys.

<sup>1</sup> For information on activated/deactivated airbag, see page 22.

**! WARNING**

Never place a child in a child seat or on a booster cushion in the front seat if the airbag (SRS) is activated.

No one shorter than 140 cm should ever sit in the front passenger seat if the airbag (SRS) is activated.

Failure to follow the advice given above can endanger life.

**! WARNING**

Booster cushions/child seats with steel braces or some other design that could rest on the seatbelt buckle's opening button must not be used, as they could cause the seatbelt buckle to open accidentally.

Do not allow the upper section of the child seat to rest against the windscreen.

**Label Airbag**

*The label becomes visible when the passenger door is opened; see the illustration on page 22.*



## Child safety

### Recommended child seats<sup>2</sup>

Weight	Front seat (with deactivated airbag)	Outer rear seat	Centre rear seat
Group 0 max 10 kg  Group 0+ max 13 kg		Volvo infant seat (Volvo Infant Seat) - rear-facing child seat, secured with the ISOFIX fixture system.  Type approval: E1 04301146  (L)	
Group 0 max 10 kg  Group 0+ max 13 kg	Volvo infant seat (Volvo Infant Seat) - rear-facing child seat, secured with the car's seatbelt.  Type approval: E1 04301146  (U)	Volvo infant seat (Volvo Infant Seat) - rear-facing child seat, secured with the car's seatbelt.  Type approval: E1 04301146  (U)	Volvo infant seat (Volvo Infant Seat) - rear-facing child seat, secured with the car's seatbelt.  Type approval: E1 04301146  (U)
Group 0 max 10 kg  Group 0+ max 13 kg	Child seats which are universally approved. <sup>A</sup>  (U)	Child seats which are universally approved.  (U)	

<sup>2</sup> With regard to other child seats your car should be included in the manufacturer's enclosed list of vehicles or be universally approved in accordance with the ECE R44 legal requirement.



## Child safety

Weight	Front seat (with deactivated airbag)	Outer rear seat	Centre rear seat
Group 1 9-18 kg	Volvo rear-facing/turnable child seat (Volvo Convertible Child Seat) - rear-facing child seat, secured with the car's seatbelt and straps. Type approval: E5 04192 (L)	Volvo rear-facing/turnable child seat (Volvo Convertible Child Seat) - rear-facing child seat, secured with the car's seatbelt and straps. Type approval: E5 04192 (L)	
Group 1 9-18 kg	Child seats which are universally approved. <sup>A</sup> (U)	Child seats which are universally approved. (U)	
Group 2 15-25 kg	Volvo rear-facing/turnable child seat (Volvo Convertible Child Seat) - rear-facing child seat, secured with the car's seatbelt and straps. Type approval: E5 04192 (L)	Volvo rear-facing/turnable child seat (Volvo Convertible Child Seat) - rear-facing child seat, secured with the car's seatbelt and straps. Type approval: E5 04192 (L)	
Group 2 15-25 kg	Volvo rear-facing/turnable child seat (Volvo Convertible Child Seat) - front-facing child seat, secured with the car's seatbelt. Type approval: E5 04191 (U)	Volvo rear-facing/turnable child seat (Volvo Convertible Child Seat) - front-facing child seat, secured with the car's seatbelt. Type approval: E5 04191 (U)	
Group 2/3 15-36 kg	Volvo booster seat with backrest (Volvo Booster Seat with backrest). Type approval: E1 04301169 (UF)	Volvo booster seat with backrest (Volvo Booster Seat with backrest). Type approval: E1 04301169 (UF)	



## Child safety

Weight	Front seat (with deactivated airbag)	Outer rear seat	Centre rear seat
Group 2/3 15-36 kg	Booster cushion with and without backrest (Booster Cushion with and without backrest). Type approval: E5 04216 (UF)	Booster cushion with and without backrest (Booster Cushion with and without backrest). Type approval: E5 04216 (UF)	

L: Suitable for specific child seats. These child seats may be intended for use in a special car model, limited or semi-universal categories.

U: Suitable for universally approved child seats in this weight class.

UF: Suitable for front-facing universally approved child seats in this weight class.


B: Built-in child seats approved for this weight class.

A Only for rear-facing child seat. Set the seat's backrest in upright position.

### Child safety locks, rear doors

The controls for operating the rear door power windows and the rear door opening handles can be blocked from opening from the inside. For more information, see page 62.

### ISOFIX fixture system for child seats

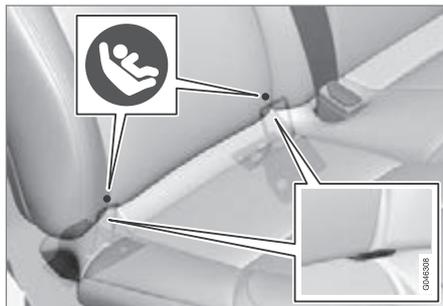

Mounting points for the ISOFIX fixture system are located at the lower section of the rear seat backrest, in the outer seats.

The location of the mounting points is indicated by symbols in the backrest upholstery (see preceding illustration).

Always follow the manufacturer's installation instructions when connecting a child seat to the ISOFIX mounting points.

### Size classes

Child seats are in different sizes – cars are in different sizes. This means that not all child



## Child safety

seats are suitable for all seats in all car models.

Consequently, there is a size classification for child seats using the ISOFIX fixture system in order to assist users in choosing the correct child seat (see the following table).

Size class	Description
A	Full size, front-facing child seat
B	Reduced size (alt. 1), front-facing child seat
B1	Reduced size (alt.2), front-facing child seat

Size class	Description
C	Full size, rear-facing child seat
D	Reduced size, rear-facing child seat
E	Rear-facing infant seat
F	Transverse infant seat, left-hand
G	Transverse infant seat, right-hand

**⚠ WARNING**

Never place the child in the passenger seat if the car is fitted with an activated air-bag.

**i NOTE**

If an ISOFIX child seat has no size classification, the car model must be included on the vehicle list for the child seat.

**i NOTE**

Volvo recommends that you contact an authorised Volvo dealer for recommendations about which ISOFIX child seats Volvo recommends.

## Types of ISOFIX child seat

Type of child seat	Weight	Size class	Passenger seats for ISOFIX installation of child seats	
			Front seat	Outer rear seat
Infant seat transverse	max 10 kg	F	X	X
		G	X	X



## Child safety

Type of child seat	Weight	Size class	Passenger seats for ISOFIX installation of child seats	
			Front seat	Outer rear seat
Infant seat, rear-facing	max 10 kg	E	X	OK (IL)
Infant seat, rear-facing	max 13 kg	E	X	OK (IL)
		D	X	OK (IL)
		C	X	OK (IL)
Child seat, rear-facing	9-18 kg	D	X	OK (IL)
		C	X	OK (IL)



## Child safety

01

Type of child seat	Weight	Size class	Passenger seats for ISOFIX installation of child seats	
			Front seat	Outer rear seat
Front-facing child seat	9-18 kg	B	X	OK <sup>A</sup> (IUF)
		B1	X	OK <sup>A</sup> (IUF)
		A	X	OK <sup>A</sup> (IUF)

X: The ISOFIX position is not suitable for ISOFIX child seats in this weight class and/or size class.

IL: Suitable for specific ISOFIX child seats. These child seats may be intended for use in a special car model, limited or semi-universal categories.


IUF: Suitable for front-facing ISOFIX child seats that are universally approved in this weight class.

A Volvo recommends rear-facing child seats for this group.



## Child safety

### Upper mounting points for child seats

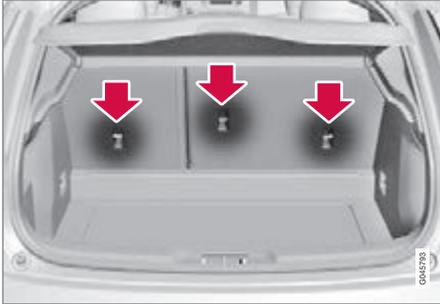

The car is equipped with upper mounting points for certain front-facing child seats. These mounting points are located on the rear of the seat.

The upper mounting points are primarily intended for use with front-facing child seats. Volvo recommends that small children should sit in rear-facing child seats to as late an age as possible.

### NOTE

Fold the head restraints in order to facilitate fitting this type of child seat in cars with folding head restraints on the outer seats.

### NOTE

In cars with a cargo cover over the luggage compartment, this must be removed before child seats can be attached to the securing points.

For detailed information on how the child seat should be tensioned in the upper mounting points, see the seat manufacturer's instructions.

### WARNING

The child seat's straps must always be drawn through the hole in the head restraint leg before they are tensioned at the attachment point.



[Empty rectangular box]

Remote control key/key blade.....	44
Battery replacement, remote control key/PCC*.....	50
Keyless*.....	52
Locking/unlocking.....	56
Child safety locks.....	62
Alarm*.....	63



# 02

## LOCKS AND ALARM





## Remote control key/key blade

### General

The car is supplied with two remote control keys - standard or with keyless function. They are used to start/switch off the car and for locking/unlocking.

The remote control key contains a removable key blade made of metal. The visible section is available in two versions so that it is possible to distinguish between the remote control keys.

Additional remote control keys can be ordered - up to six can be programmed and used for the same car.

There are four remote control key variants:

- Remote control key, standard<sup>1</sup>
- Remote control key with Keyless start<sup>1</sup>
- Remote control key with Keyless drive<sup>1</sup>
- PCC with Keyless drive<sup>2</sup>

For information on remote control key function buttons see page 46.

PCC plus remote control key with keyless function has extended functionality compared with standard remote control key. The rest of

this chapter describes functions available in all variants.



### WARNING

If there are children in the car:

Remember to switch off the supply to the power windows by removing the remote control key if the driver leaves the car.

### Loss of a remote control key

If you lose a remote control key then a new one can be ordered at a workshop - an authorised Volvo workshop is recommended. The remaining remote control keys must then be taken to the workshop. The code of the missing remote control key must be erased from the system as a theft prevention measure.

The current number of keys registered to the car can be checked in the menu system **MY CAR** under **Information** → **Number of keys**. For a description of the menu system, see page 207.

### Key memory<sup>3</sup> - door mirrors, driver's seat and steering force

The settings are automatically connected to each respective remote control key, see pages 84, 106 and 240. When locking with the remote control key the setting of the combined instrument panel's theme is saved in the key, see pages 72 and 209.

The function can be activated/deactivated in the menu system **MY CAR** under **Settings** → **Car settings** → **Car key memory**.

For a description of the menu system, see page 207.

For remote control keys with keyless function, see page 52.

### Indicator for locking/unlocking

When the car is locked or unlocked using the remote control key, the direction indicators confirm that locking/unlocking was correctly performed.

- Locking - one flash and the door mirrors are folded<sup>4</sup> in.
- Unlocking - two flashes and the door mirrors are folded<sup>4</sup> out.

<sup>1</sup> 5-button key

<sup>2</sup> 6-button key

<sup>3</sup> Only in combination with power driver's seat and power mirrors.

<sup>4</sup> Only for cars with retractable power door mirrors.



## Remote control key/key blade

### **i** NOTE

Be aware of the risk of locking the remote control key in the car.

When locking, indication is given only if all locks have been locked and all doors are closed. Indication is given when the last door has been closed.

### Selecting the function

Different options for indicating locking/unlocking with light can be set in the car's menu system, see page 207.

Search in the menu system **MY CAR** for **Settings** → **Car settings** → **Light settings** and select **Door lock confirmation light** and/or **Unlock confirmation light**.

### Lock indicator



Same LED as alarm indicator, see page 63.

A flashing LED by the windscreen verifies that the car is locked.

### **i** NOTE

Cars that are not equipped with alarm also have this indicator.

### Immobiliser

Each remote control key has a unique code. The car can only be started with the correct remote control key with the correct code.

The following error messages in the combined instrument panel's information display are related to the electronic immobiliser:

Message	Specification
Insert car key	Error when reading the remote control key during starting - Remove the key from the ignition switch, press it in again and make a new start attempt.
Car key not found (Applicable only to cars with Keyless Drive, see page 54.)	Error reading the remote control key during starting - Try to start again. If the error persists: Insert the remote control key into the ignition switch and try to start again.
Immobiliser Try to start again	Error in immobiliser system during starting. If the error persists: Contact a workshop - an authorised Volvo workshop is recommended.

For starting the car, see page 115.



## Remote control key/key blade

### Functions



5-button remote control key

- Locking
- Unlocking
- Approach light duration
- Tailgate
- Panic function



Remote control key with PCC\* - Personal Car Communicator.

- Information

### Function buttons

**Locking** – Locks the doors and tailgate while the alarm is activated.

Press and hold (at least 2 seconds) to close all windows simultaneously.

### **WARNING**

If windows are closed using the remote control key, check that nobody's hands are trapped.

**Unlocking** – Unlocks the doors and tailgate while the alarm is deactivated.

Press and hold (at least 4 seconds) to open all windows simultaneously.

The function can be changed from unlocking all doors simultaneously, to unlocking the driver's door only with one press of the button and, after a further press of the button - within 10 seconds - unlocking the remaining doors.

The function can be changed in the menu system **MY CAR** under **Settings** → **Car settings** → **Lock settings** → **Doors unlock** with both the alternatives **All doors** and **Driver door, then all**. For a description of the menu system, see page 207.

**Approach light duration** – Used to switch on the car's lighting at a distance. For more information, see page 97.

**Tailgate** - Unlocks and disarms the alarm for the tailgate only. For more information, see page 58.

**Panic function** – Used to attract attention in an emergency.

Press and hold the button for at least 3 seconds or press it twice within 3 seconds to activate the direction indicators and the horn.

The function can be turned off with the same button once it has been active for at least 5 seconds. Otherwise the function switches



## Remote control key/key blade

off automatically after 2 minutes and 45 seconds.

### Range


The remote control key's functions have a range of about 20 m from the car.

If the car does not verify a button being pressed - move closer and try again.

### NOTE

The remote control key functions may be disrupted by surrounding radio waves, buildings, topographical conditions, etc. The car can always be locked/unlocked with the key blade, see page 49.

### Unique PCC functions\*

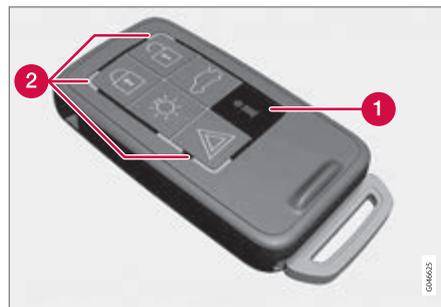

Remote control key with PCC\* - Personal Car Communicator.

- 1 Information button
- 2 Indicator lamps

Using the information button enables access to certain information from the car via the indicator lamps.

### Using the information button

- Press the information button .
  - > All indicator lamps flash for approximately 7 seconds and the light travels around on the PCC. This indicates that information from the car has been read.

If any of the other buttons are pressed during this time then the reading is interrupted.


### NOTE

 If none of the indicator lamps illuminates with repeated use of the information button and in different locations (as well as after 7 seconds and after the light has travelled around on the PCC), contact a workshop - an authorised Volvo workshop is recommended.

Indicator lamps display information in accordance with the following illustration:



## Remote control key/key blade

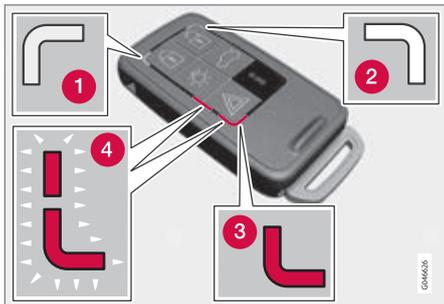

- 1 Green continuous light – the car is locked.
- 2 Yellow continuous light – the car is unlocked.
- 3 Red continuous light – the alarm has been triggered since the car was locked.
- 4 Red light flashing alternately in both indicator lamps – The alarm was triggered less than 5 minutes ago.

### Range PCC

The PCC's range for locking, unlocking and tailgate is about 20 m from the car - for other functions up to about 100 m.

If the car does not verify a button being pressed - move closer and try again.

### NOTE

The information button function may be disrupted by surrounding radio waves, buildings, topographical conditions, etc.

### Out of PCC range

If the PCC is too far away from the car for the information to be read then the status the car was last left in is shown, without the light travelling around on the PCC.

If several PCCs are used for the car then it is only the PCC last used for locking/unlocking that shows correct status.

### NOTE

If none of the indicator lamps illuminates with repeated use of the information button and in different locations (as well as after 7 seconds and after the light has travelled around on the PCC), contact a workshop - an authorised Volvo workshop is recommended.

### Detachable key blade

A remote control key contains a detachable key blade of metal with which some functions can be activated and some operations carried out.

The key blade's unique code is provided by authorised Volvo workshops, which are recommended when ordering new key blades.

### Key blade functions

Using the remote control key's detachable key blade:

- the left-hand front door can be opened manually if central locking cannot be activated with the remote control key, see page 54.
- the rear doors' mechanical child safety locks can be activated/deactivated, see page 62.
- the right-hand front door and the rear doors can be locked manually, e.g. in the event of power failure, see page 56.
- The glovebox lock\* opens see page 58.
- the airbag for front passenger seat (PACOS)\* can be activated/deactivated, see page 22.

**Remote control key/key blade****Removing the key blade**

- 1 Slide the spring-loaded catch to the side.
- 2 At the same time pull the key blade straight out backwards.

**Attaching the key blade**

Carefully refit the key blade into its location in the remote control key.

1. Hold the remote control key with the slot pointed up and lower the key blade into its slot.
2. Lightly press the key blade. You should hear a "click" when the key blade is locked in.

**Unlocking doors with the key blade**

If central locking cannot be activated with the remote control key - e.g. if the batteries are discharged - then the left-hand front door can be opened as follows:

1. Unlock the left-hand front door with the key blade in the door handle's lock cylinder.

To see a figure and for more information, see page 54.

 **NOTE**

When the door has been unlocked using the key blade and is opened, the alarm is triggered.

2. Deactivate the alarm by inserting the remote control key in the ignition switch.

For a car with Keyless Drive, see page 54.



## Battery replacement, remote control key/PCC\*


### Replacing the battery

The batteries should be replaced if:

- the information symbol illuminates in the combined instrument panel and its information display shows **Low battery in remote control**. Please change batteries.

and/or

- the locks repeatedly do not react to signals from the remote control key within 20 metres from the car.

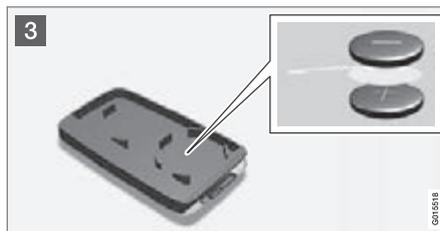

### Opening

**1** Slide the spring-loaded catch to the side.

**2** At the same time pull the key blade straight out backwards.

**2** **3** Insert a 3 mm slot screwdriver in the hole behind the spring-loaded catch and gently prize the remote control key up.

### NOTE

Turn the remote control key over with the buttons facing up, this is to avoid the batteries falling out when it is opened.

### IMPORTANT

Avoid touching new batteries and their contact surfaces with your fingers as this may impair their function.

### Battery replacement

**3** Closely study how the battery/batteries are secured on the inside of the cover, with regard to their (+) and (-) sides.

### Remote control key with 1 battery

- Carefully prize out the battery.
- Install a new one with the (+) side down.

### Remote control key and PCC\* with 2 batteries

- Carefully prize out the batteries.
- First install one new one with the (+) side up.
- Position the white plastic tab in between and finally install a second new battery with the (+) side down.

### Battery type

Use batteries with designation CR2430, 3 V.

### Assembly

- Press the remote control key together.
- Hold the remote control key with the slot pointed up and lower the key blade into its slot.
- Lightly press the key blade. You should hear a "click" when the key blade is locked in.



### Battery replacement, remote control key/PCC\*

#### **IMPORTANT**

Make sure that exhausted batteries are disposed of in a manner which is kind to the environment.


02



## Keyless\*

### Keyless lock and ignition system\*

#### General

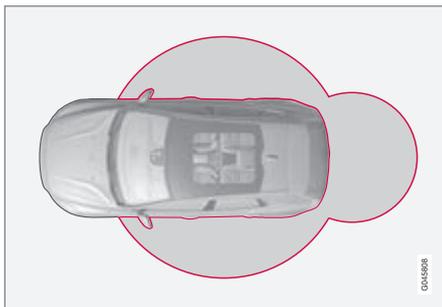

Below is a description of remote control keys with Keyless drive and Keyless start functions. For cars with a Keyless start function, the car can be started without the remote control key being inserted in the ignition lock. For cars with a Keyless drive function, the car can be locked and unlocked without pressing a button on the remote control key, and also be started without the key being inserted in the ignition lock. The system makes it easier and more convenient to open the car, e.g. when your hands are full.

Both of the car's remote control keys have Keyless function. It is possible to order more remote control keys, see page 44.

The car's electrical system can be set to 3 different levels (key positions) - **0**, **I** and **II** - with the remote control key, see page 81.

#### Remote control key range<sup>1</sup>

In order to open a door or the tailgate without pressing a button on the remote control key, a remote control key must be approx. 1.5 m from the car door handle or tailgate. This means that the person who wishes to lock or unlock a door must have the remote control key with him or her. It is not possible to lock or unlock a door if the remote control key is on the opposite side of the car.

The red rings in the preceding illustration indicate the range covered by the system's antennas.

If all remote control keys are removed from the car when the engine is running or key position **I** or **II** is active (see page 81) and a door has been opened and then closed, the information display in the combined instrument panel shows a warning message while sounding an audible reminder at the same time.

When the remote control key has been returned to the car, the warning message goes off and the audible reminder ceases once either/or:

- a door has been opened and closed
- the remote control key has been inserted in the ignition lock
- The **OK** button on the direction indicator stalk.

#### Safe operation of the remote control key with keyless function

If a remote control key with keyless function is left in the car, it is deactivated temporarily when the car is locked. This prevents unauthorised entry.

However, if someone breaks into the car and finds the remote control key, it is reactivated. It is therefore important to handle all remote control keys with great care.



#### IMPORTANT

When the door has been unlocked using the key blade and is opened, the alarm is triggered.

<sup>1</sup> Does not apply to cars with keyless start



## Keyless\*


**Interference to remote control key function**

Electromagnetic fields and screening can interfere with the Keyless function.

**NOTE**

Do not place/store the remote control key with keyless function near a mobile phone or metal object - no closer than 10-15 cm.

If interference is experienced nonetheless, use the remote control key and the key blade like a traditional remote control key, see page 46.

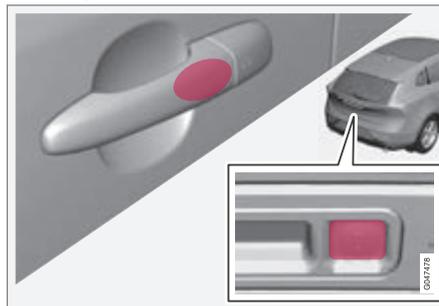**Locking<sup>2</sup>**

*Cars with the Keyless-drive system have a touch-sensitive area on the outer handle of the doors and a rubberised button next to the tailgate's rubberised pressure plate.*

Lock the doors and the tailgate by grasping one of the door handles or pressing the smaller of the tailgate's two rubberised buttons - the lock indicator in the windscreen confirms that locking has been completed by starting to flash, see page 45.

All doors and the tailgate must be closed before the car can be locked - otherwise the car is not locked.

**NOTE**

In cars with automatic gearbox selectors, the gear selector must be set to the **P** position; otherwise the car can be neither locked nor alarmed.

**Unlocking<sup>2</sup>**

Unlocking with Keyless-drive takes place when a hand grasps a door handle or the tailgate's rubberised pressure plate is actuated - open the door or tailgate as normal.

**NOTE**


The door handles normally register a hand that takes hold of the handle, but with thick gloves on or after a very quick hand movement a second attempt may be required, or with the glove taken off.

<sup>2</sup> Not applicable to remote control keys with keyless start



### Keyless\*

#### Unlocking with the key blade

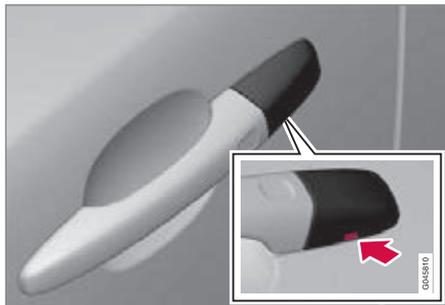

Hole for key blade - to loosen the cover.

If central locking cannot be activated with the remote control key - e.g. if the batteries are discharged - then the left-hand front door can be opened using the remote control key's removable key blade (see page 49).

To access the lock cylinder, the door handle's plastic cover must be removed - this is also done with the key blade:

1. Press the key blade approx. 1 cm straight up into the hole on the underside of the door handle/cover - do not prize.
  - > The plastic cover loosens automatically by means of the torque when the

blade is pushed straight up and into the opening.

2. Then insert the key blade in the lock cylinder and unlock the door.
3. Refit the plastic cover after unlocking.

#### NOTE

When the front left door is unlocked using the key blade and is opened, the alarm is triggered. It is switched off by inserting the remote control key in the ignition switch, see page 64.

#### Key memory<sup>3</sup> - driver's seat, door mirrors and steering force

##### Memory function in remote control key with keyless function

If several people each with a remote control key approach the car, then the settings for seat and mirrors are implemented for the person who opens the driver's door.

After the driver's door has been opened by person A with remote control key A, but person B with remote control key B is to drive, the settings can be changed as follows:

- Standing by the driver's door, or sitting behind the steering wheel, person B

presses their remote control key's unlock button, see page 46.

- Select one of three possible memories for seat adjustment with seat button 1-3, see page 84.
- Adjust seat and mirrors manually, see page 84 and 106.
- Adjust steering force in the **MY CAR** menu system; see see page 209.

#### Lock settings

The Keyless-drive function can be adapted by indicating in the menu system **MY CAR** which doors are to be unlocked, under **Car settings** → **Lock settings** → **Keyless entry** - there select between **All doors unlock**, **Any door**, **Doors on same side** and **Both front doors**.


For a description of the menu system, see page 207.

<sup>3</sup> Only in combination with power driver's seat and power mirrors.



## Keyless\*

## Antenna location

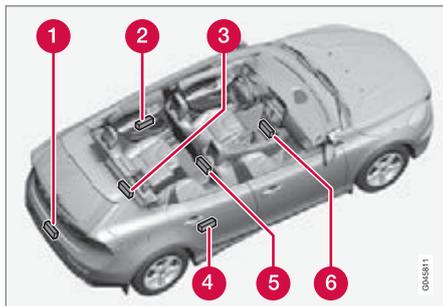

The Keyless system has a number of integrated antennae located around the car:

- 1 Rear bumper, centre
- 2 Door handle, left rear
- 3 Cargo area, central and furthest in under the floor
- 4 Door handle, right rear
- 5 Centre console, under the rear section
- 6 Centre console, under the front section.

**WARNING**

People who have had a pacemaker operation should not come closer than 22 cm to the Keyless system's antennas with their pacemaker. This is to prevent interference between the pacemaker and the Keyless system.

02



## Locking/unlocking

### From the outside

The remote control key can lock/unlock all doors, the tailgate and the fuel filler flap. Different sequences for unlocking can be selected, see "Unlocking with the remote control key" page 46.

In order that the lock sequence can be activated, the driver's door must be closed - if any of the other doors or the tailgate is open, then it/they is/are locked and the alarm is activated only when it/they are closed. With the Keyless\* system all the doors and tailgate must be closed.

### **i** NOTE

Be aware of the risk of locking the remote control key in the car.

If it is not possible to lock/unlock with the remote control key, the battery may be discharged - lock or unlock the left-hand front door with the detachable key blade, see page 49.

### **i** NOTE

Remember that the alarm is triggered when the door is opened after being unlocked with the key blade - the alarm is switched off when the remote control key is inserted into the ignition switch.

### **!** WARNING

Be aware of the risk of being locked in the car when it is locked from the outside using the remote control key - it is then not possible to open any of the doors from the inside with the door controls. For more information, see page 60, Deadlocks.

### Automatic relocking

If none of the doors or the tailgate is opened within 2 minutes of unlocking, all are locked again automatically. This function reduces the risk that the car is left unlocked unintentionally. (For cars with alarm, see page 63.)


### Manual locking

In certain situations the car must be lockable manually, e.g. in the event of power failure.

The left-hand front door can be locked with its lock cylinder and the remote control key's detachable key blade, see page 54.

Other doors have no lock cylinders and instead have a lock switch on the end of each

door which must be depressed using the key blade - they are then mechanically locked/ blocked to prevent them being opened from outside. The doors can still be opened from the inside.

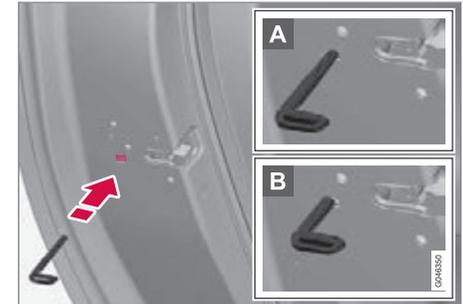

Manual locking of the door. Not to be mixed up with child safety locks, see page 62.

- Remove the removable key blade from the remote control key, see page 49. Insert the key blade into the hole of the lock switch and press in the key until it reaches the bottom, approx. 12 mm.
- A** The door can be opened from both the outside and the inside.
- B** The door is blocked against opening from the outside. To return to position A, the inner door handle must be opened.

**Locking/unlocking**

The doors can also be unlocked with the unlock button on the remote control key or with the central locking button on the driver's door.

**NOTE**

- A door's lock reset only locks that particular door - not all doors simultaneously.
- A manually locked rear door with an activated manual child safety lock cannot be opened from either the outside or the inside, see page 62. A rear door that is locked in this way can only be unlocked with the remote control key or central locking button.

**From the inside****Central locking**

*Central locking.*

All of the doors and the tailgate can be locked or unlocked simultaneously using the central locking button on the driver's door.

- Press one side of the button to lock - the other side to unlock.

**Lamp in lock button**

When the lamp in the central locking button for the driver's door is illuminated it means that all doors are locked.

**Unlocking**

A door can be unlocked from the inside in two different ways:

- Press the central locking button .

Press and hold (at least 4 seconds) to also open all the side windows\* simultaneously.

- Pull the door handle and open the door - the door is unlocked and opened in one operation.

**Locking**

- Both front doors must be closed for the central locking to be activated. Press the central locking button - all doors are locked. If any of the rear doors is open, it will lock when it is closed.

Press and hold (at least 2 seconds) to also close all the side windows simultaneously.

**Global opening**

Press and hold the central locking button (at least 4 seconds) to also open all the windows simultaneously - for example, to quickly ventilate the passenger compartment during hot weather.

**Automatic locking**


The doors and tailgate are locked automatically when the car starts to move.

The function can be activated/deactivated in the menu system **MY CAR** under **Settings** → **Car settings** → **Lock settings** → **Automatic door locking**. For a description of the menu system, see page 207.



## Locking/unlocking

### Lock cylinder, glovebox\*

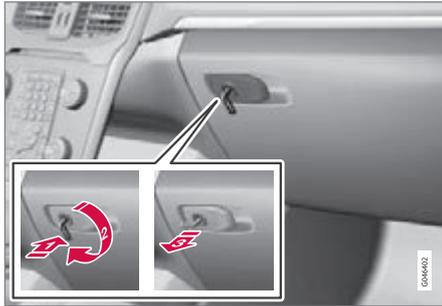


The glovebox can only be locked/unlocked using the remote control key's detachable key blade. For information on the key blade, see page 49.

Locking the glovebox:

- 1 Insert the key blade in the glovebox lock cylinder.
  - 2 Turn the key blade 90 degrees clockwise. The keyhole is horizontal in the locked position.
  - 3 Pull out the key blade.
- Unlock by carrying this out in reverse order.

### Tailgate

#### Manual opening

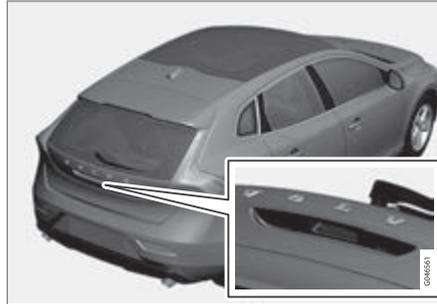

*Rubber plate with electrical contact.*

The tailgate is held closed by an electrical lock. To open:

1. Push down gently on the wider of the two rubberised pressure plates under the outer handle - the lock is released.
2. Lift the outside handle in order to fully open the tailgate.



### IMPORTANT

- Minimal force is required to release the rear hatch lock - just gently press the rubberised panel.
- Do not place the lift force on the rubber panel when opening the rear hatch - lift the handle. Using too much force may damage the electrical contacts on the rubber panel.

### Unlocking with the remote control key



The alarm for the tailgate can be disarmed\* and the tailgate unlocked on its own by using the remote control key's  button.

The lock indicator on the instrument panel stops flashing in order to show that not all of the car is locked and the alarm's\* level and

**Locking/unlocking**

movement sensors and the sensors for opening the tailgate are disconnected.

The doors remain locked and armed.

The tailgate can be opened in two different ways using the remote control key:

**One press** - The boot lid is unlocked, but remains closed - press lightly on the rubberised pressure plate under the outer handle and lift the boot lid. If the tailgate is not opened within 2 minutes then it is relocked and the alarm is re-armed.

**Two presses** - The boot lid is unlocked and the lock is disengaged at which the boot lid opens about a centimetre - lift the outer handle to open. Rain, cold, frost or snow could however prevent the tailgate from disengaging from the lock.

**NOTE**

- When the boot lid/tailgate is unlocked with 2 presses or from the car interior, automatic relocking does not take place because the boot lid/tailgate is open - it must be closed manually.
- After the boot lid/tailgate has been closed it is unlocked and the alarm is not armed - relock it and re-arm the alarm with the remote control key's lock button .

**Opening the car from inside**

To open the tailgate:

- Press the lighting panel button.

- > The lock releases and the tailgate opens by a few centimetres.

**Locking with the remote control key**

- Press the remote control key's button for locking, , see page 46.
- > The lock indicator on the instrument panel starts flashing, which means that the car is locked and the alarm\* has been activated.

**Fuel filler flap**

The fuel filler flap is unlocked using the remote control key  button. The fuel filler flap remains unlocked until the car is locked with the remote control key  button. If the car is locked during travel or with the interior buttons, the fuel filler flap will remain unlocked.

The fuel filler flap locking logic also follows the locking or unlocking of the keyless-drive and the central locking system. Fuel filler flap locking always occurs after a 10-minute delay.



## Locking/unlocking

### Deadlocks\*<sup>1</sup>

Deadlocks means that all door handles are mechanically disengaged, which prevents doors being opened from the inside.

The deadlocks are activated with the remote control key and are set after an approximately 10 second delay after the doors have been locked.

#### **i** NOTE

If a door is opened within the delay time then the sequence is interrupted and the alarm is deactivated.

The car can only be unlocked from a deadlock state with the remote control key. The front left door can also be unlocked with the detachable key blade.

#### **!** WARNING

Do not allow anyone to remain in the car without first deactivating the deadlocks in order to avoid the risk of anyone being locked in.

### Temporary deactivation



Active menu options are indicated with a cross.

- 1** MY CAR
- 2** OK MENU
- 3** TUNE knob control
- 4** EXIT

If someone is going to stay in the car but the doors must be locked from the outside, then the deadlocks function can be temporarily switched off. This is carried out as follows:

1. Access the menu system **MY CAR** under **Settings** → **Car settings** → **Reduced Guard** (for a detailed description of the menu system, see page 207).

2. Select **Activate once**.
    - > The combined instrument panel shows the message **Locks and alarm Reduced guard** and the deadlocks function is switched off when the car is locked.
- or
- Select **Ask when exiting**.
    - > Each time the engine is switched off the centre console's screen shows the message **Activate Reduced Guard until engine has started again?** followed by the alternatives **Confirm with OK** and **Cancel with EXIT**.

#### If the deadlocks function shall be switched off

- Press **OK/MENU** and lock the car. (Note that the alarm's movement and tilt detectors\* are switched off at the same time, see page 64.)
  - > The next time the engine is started, the system is reset to zero and the combined instrument panel shows the message **Locks and alarm Full guard** at which the deadlocks function and the alarm's movement and tilt detectors are re-engaged.

<sup>1</sup> Only in combination with alarm.

**Locking/unlocking****If the locking system shall not be changed**

- Press **EXIT** and lock the car.

**NOTE**


- Remember that the alarm is activated when the car is locked.
- If any of the doors are opened from the inside then the alarm is triggered.



## Child safety locks

### Manual blocking of the rear doors

The child safety locks prevent children from opening a rear door from the inside.

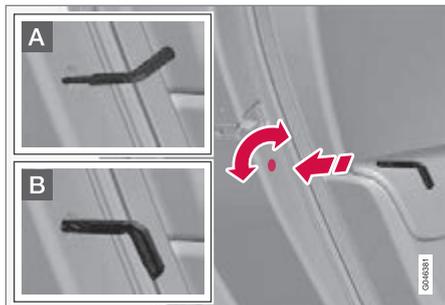

With child safety locks. Not to be mixed up with manual door locks, see page 56.

The child safety locks are located on the trailing edge of the rear doors and are only accessible when the doors are open.

To activate/deactivate the child safety locks:

- Use the remote control key's detachable key blade to turn the knob - see page 49.

- A** The door is blocked against opening from the inside.
- B** The door can be opened from both the outside and the inside.

### NOTE

- A door's knob control only blocks that particular door - not both rear doors simultaneously.
- Cars with an electric child safety lock do not have a manual child lock.

### Electrical locking of the rear doors\* and power windows



Control panel driver's door.

The child safety locks can be activated/deactivated in all key positions higher than **0** - see page 81. Activation/deactivation can be performed up to 2 minutes after switching off the engine, provided that no door is opened.

To activate the child safety locks:

1. Start the engine or choose a key position higher than **0**.
2. Press the button in the driver's door control panel.
  - > The information display shows the message **Rear child lock activated** and the button's lamp illuminates - the locks are active.

When the electric child safety lock is active then the rear:

- windows can only be opened with the driver's door control panel
- doors cannot be opened from inside.

The current setting is stored when the engine is switched off - if the child safety locks are activated at engine shutdown, the function will remain activated the next time the engine is started.



## General

Activated alarm is triggered if:

- a door, the bonnet or the tailgate is opened
- a movement is detected in the passenger compartment (if fitted with a movement detector\*)
- the car is raised or towed away (if fitted with a tilt detector\*)
- the battery's cable is disconnected
- the siren is disconnected.

If there is a fault in the alarm system then the information display in the combined instrument panel shows a message. In which case, contact a workshop - an authorised Volvo workshop is recommended.

### NOTE

The movement sensors trigger an alarm in the event of movement in the passenger compartment - air currents are also registered. For this reason the alarm is triggered if the car is left with a window open or if the passenger compartment heater is used.

To avoid this: Close the window when leaving the car. If the car's integrated passenger compartment heater (or a portable electric heater) shall be used - direct the airflow from the air vents so that they are not pointing upwards in the passenger compartment. Alternatively, reduced alarm level can be used, see page 64.

### NOTE

Do not attempt to repair or alter components in the alarm system yourself. Any such attempts may affect the terms of the insurance.

## Alarm indicator



Same LED as lock indicator, see page 45.

A red LED on the instrument panel indicates the alarm system's status:

- LED not lit – Alarm not armed
- The LED flashes once every other second – Alarm is armed
- The LED flashes rapidly after disarming the alarm (and until the remote control key is inserted in the ignition switch and key position **I** is selected) – Alarm has been triggered.

### Arming the alarm

- Press the remote control key lock button.

### Deactivate the alarm

- Press the remote control key unlock button.



### Alarm\*

#### Deactivating a triggered alarm

- Press the remote control key unlock button or insert the remote control key in the ignition switch.

#### Other alarm functions

##### Automatic re-arming of the alarm

This function prevents the car being left with the alarm disarmed unintentionally.

If the car is unlocked with the remote control key (and the alarm is disarmed) but none of the doors or the tailgate is opened within 2 minutes, then the alarm is automatically re-armed. The car is relocked at the same time.

##### Automatic alarm activation

In certain countries, the alarm is activated after a certain delay if the driver's door was opened and closed but the car was not relocked.

##### Remote control key not working

If the alarm cannot be deactivated with the remote control key, e.g. if the key's battery is discharged - the car can be unlocked, disarmed and the engine started as follows:

1. Open the left-hand front door with the detachable key blade - see page 54.
  - > The alarm is triggered, the direction indicators flash and the siren sounds.



2. Insert the remote control key in the ignition switch.
  - > The alarm is deactivated.

##### Alarm signals

When the alarm is triggered, the following happens:

- A siren sounds for 30 seconds or until the alarm is switched off. The siren has its own battery and works independently of the car battery.
- The direction indicators flash for 5 minutes or until the alarm is switched off.

#### Reduced alarm level

To avoid accidental triggering of the alarm - e.g. if a dog is left in a locked car or during transport on a car train or car ferry - temporarily deactivate the movement and tilt detectors.

The procedure is the same as with the temporary disengaging of deadlocks, see page 60.



[Empty rectangular box]


Instruments and controls.....	68
Volvo Sensus .....	80
Key positions.....	81
Seats.....	83
Steering wheel.....	88
Lighting.....	89
Wipers and washing.....	101
Windows, rearview and door mirrors.....	104
Compass*.....	110
Alcolock*.....	111
Starting the engine.....	115
Starting the engine – external battery.....	117
Gearboxes.....	118
Start/Stop*.....	125
Foot brake.....	131
Parking brake.....	133
HomeLink® *.....	134



G041142

# 03

## YOUR DRIVING ENVIRONMENT

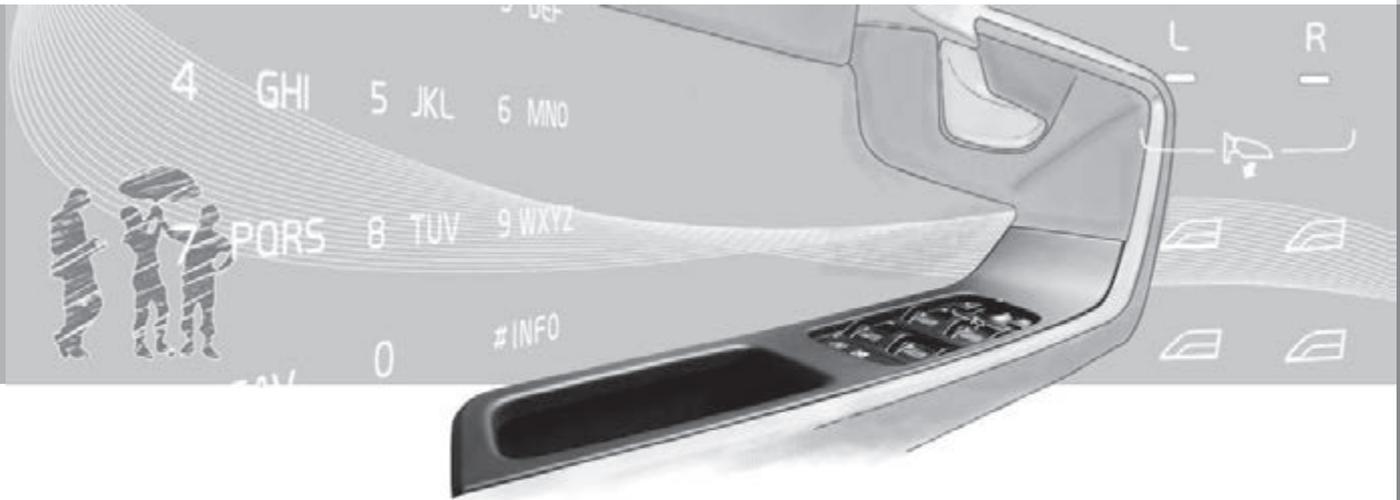




# 03 Your driving environment

## Instruments and controls

### Instrument overview

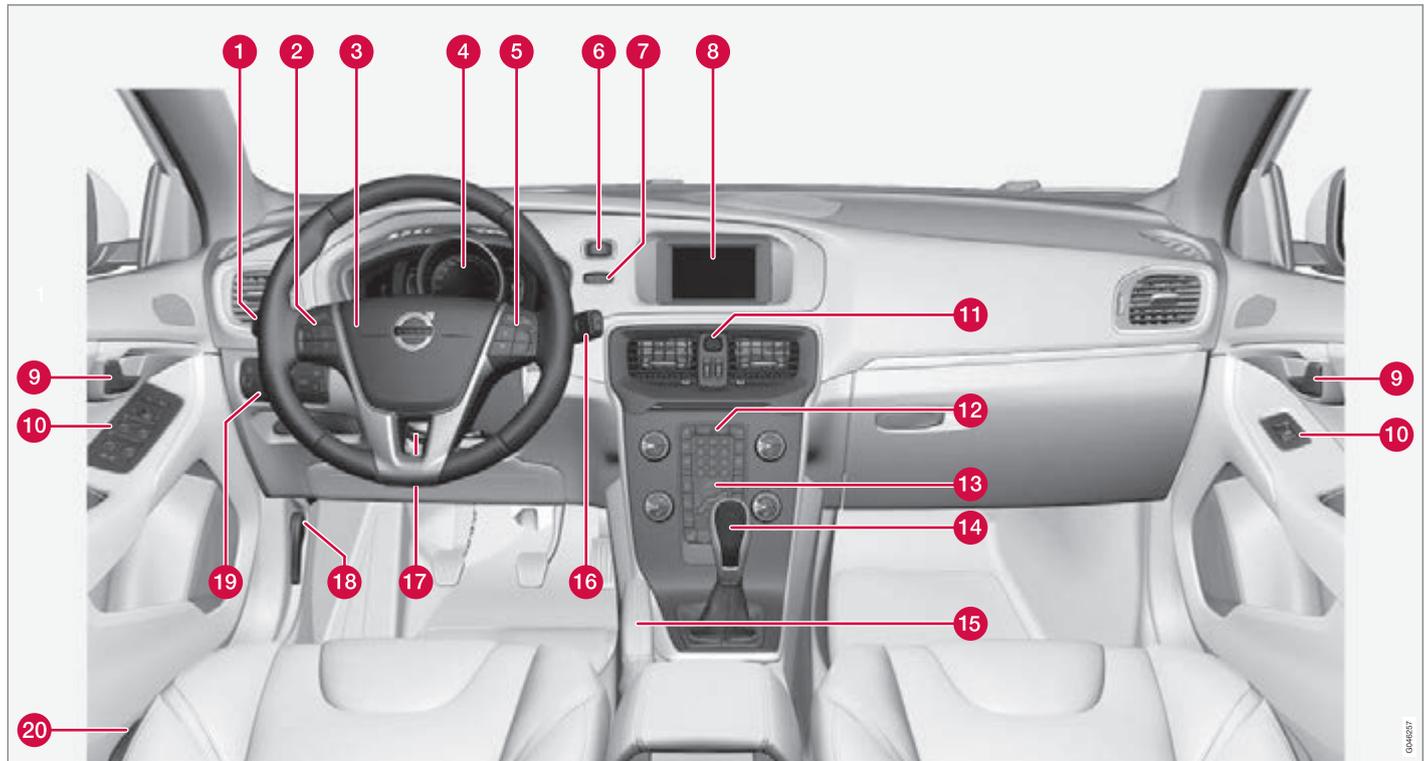

Left-hand drive.

00-000007



## Instruments and controls


	Function	Page
1	Menus and messages, direction indicators, main/dipped beam, trip computer	204, 95, 91, 232
2	Cruise control*	148,150
3	Horn, airbags	88,20
4	Combined instrument panel	71
5	Menu navigation, audio control, phone control*	207, 249, 251, 276
6	START/STOP ENGINE button	115
7	Ignition switch	81
8	Screen for infotainment and display of menus	248, 249, 207
9	Door handle	–
10	Control panel	57, 62, 104, 106
11	Hazard warning flashers	94

	Function	Page
12	Control panel for infotainment system and menu navigation	249, 251, 207
13	Control panel for climate control	218
14	Gear selector	118
15	Parking brake	133
16	Wipers and washing	101,102
17	Steering wheel adjustment	88
18	Bonnet opener	338
19	Light switch, opener for tailgate	89,58
20	Seat adjustment*	84



# 03 Your driving environment

## Instruments and controls

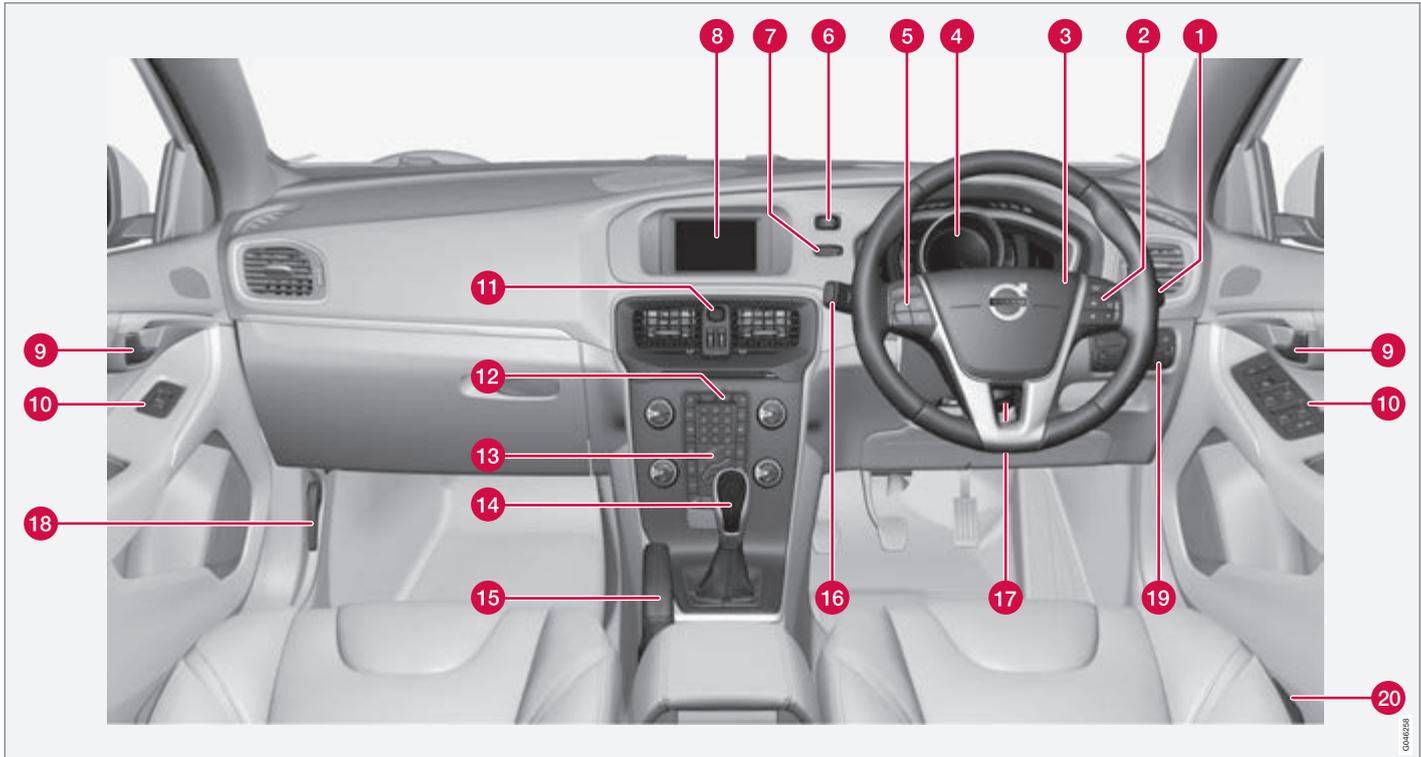

Right-hand drive.

GMZ1238




## Instruments and controls


	Function	Page
1	Wipers and washing	101, 102
2	Menu navigation, audio control, phone control*	207, 249, 251, 276
3	Horn, airbags	88, 19
4	Combined instrument panel	71
5	Cruise control*	148, 150
6	START/STOP ENGINE button	115
7	Ignition switch	81
8	Screen for infotainment and display of menus	248, 249, 207
9	Door handle	–
10	Control panel	57, 62, 104, 106
11	Hazard warning flashers	94
12	Control panel for infotainment system and menu navigation	249, 251, 207

	Function	Page
13	Control panel for climate control	218
14	Gear selector	118
15	Parking brake	133
16	Menus and messages, direction indicators, main/dipped beam, trip computer	204, 95, 91, 232
17	Steering wheel adjustment	88
18	Bonnet opener	338
19	Light switch, opener for tailgate	89, 58
20	Seat adjustment*	84

## The combined instrument panel's information display

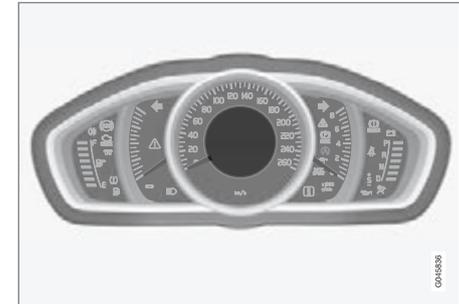

Information display, analogue instrument panel.

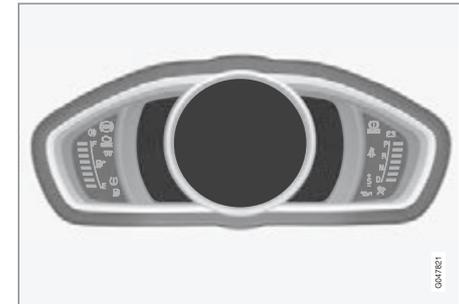

Information display, digital instrument panel.

The combined instrument panel's information display shows information on some of the




## Instruments and controls

car's functions, e.g. cruise control and trip computer, as well as messages. The information is shown with symbols and text.

There are further descriptions under the functions that use the display.

### Gauges and indicators, analogue instrument panel

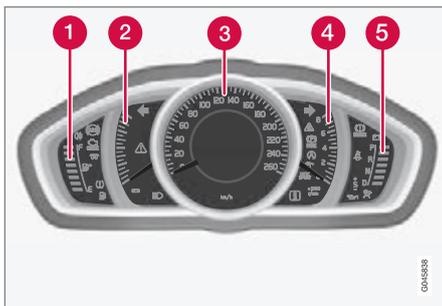

- 1 Fuel gauge. When the indicator lowers to only one white marking<sup>1</sup>, the yellow indicator symbol for low level in the fuel tank


- 2 Eco meter The meter provides an indication of how economically the car is being driven. The higher the reading on the scale, the more economical it is.
- 3 Speedometer
- 4 Tachometer. The meter indicates engine speed in thousands of revolutions per minute (rpm).
- 5 Gear shift indicator<sup>2</sup> / Gear position indicator<sup>3</sup>. See also gearboxes page 118.

### Gauges and indicators, digital instrument panel

Various themes can be selected for the digital combined instrument panel Possible themes are "Elegance", "Eco" and "Performance". The setting for the theme can be stored in the remote control key's memory when locking the car, see pages 44 and 209.

A theme can only be selected when the engine is running.

To select the theme, press the left-hand stalk switch's **OK** button and then select the **Themes** menu option by turning the thumb-wheel on the lever. Confirm your choice by pressing the **OK** button. For more information on menus, see page 204.

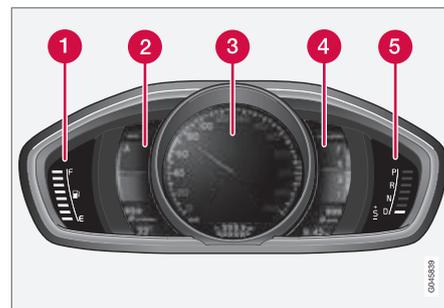

Gauges and indicators, theme "Elegance".

- 1 Fuel gauge. When the indicator lowers to only one white marking<sup>4</sup>, the yellow indicator symbol for low level in the fuel tank is illuminated. See also Trip computer page 232, and Refuelling page 299.
- 2 Temperature gauge for engine coolant

<sup>1</sup> When the display's message Distance to empty fuel tank: starts to show ----, the marking becomes red.


<sup>2</sup> Manual gearbox

<sup>3</sup> Automatic gearbox

<sup>4</sup> When the display's message Distance to empty fuel tank: starts to show ----, the marking becomes red.

## Instruments and controls


- 3 Speedometer
- 4 Tachometer. The meter indicates engine speed in thousands of revolutions per minute (rpm).
- 5 Gear shift indicator<sup>5</sup> / Gear position indicator<sup>6</sup>. See also gearboxes page 118.

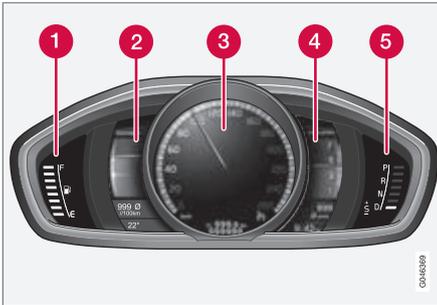

Gauges and indicators, theme "Eco".

- 1 Fuel gauge. When the indicator lowers to only one white marking<sup>4</sup>, the yellow indicator symbol for low level in the fuel tank is illuminated. See also Trip computer page 232, and Refuelling page 299.
- 2 Eco guide. See also page 73.

- 3 Speedometer
- 4 Tachometer. The meter indicates engine speed in thousands of revolutions per minute (rpm).
- 5 Gear shift indicator<sup>5</sup> / Gear position indicator<sup>6</sup>. See also gearboxes page 118.

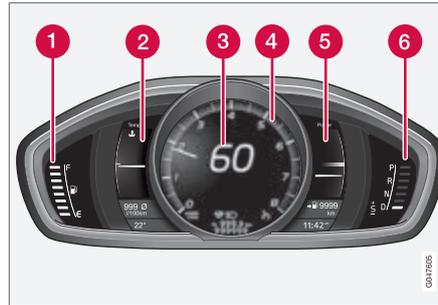

Gauges and indicators, theme "Performance".

- 1 Fuel gauge. When the indicator lowers to only one white marking<sup>4</sup>, the yellow indicator symbol for low level in the fuel tank is illuminated. See also Trip computer page 232, and Refuelling page 299.
- 2 Temperature gauge for engine coolant

- 3 Speedometer
- 4 Tachometer. The meter indicates engine speed in thousands of revolutions per minute (rpm).
- 5 Power guide. See also page 74.
- 6 Gear shift indicator<sup>5</sup> / Gear position indicator<sup>6</sup>. See also gearboxes page 118.

## Eco guide &amp; Power guide\*

## General

The Eco guide and Power guide instruments help the driver to drive the car while maintaining the best possible driving economy.

The car also stores statistics of journeys made, which can be viewed in the form of a block diagram, see page 238.

## Eco guide

This meter provides an indication of how economically the car is being driven.

To view this function, select the theme "Eco", see page 73.

<sup>5</sup> Manual gearbox

<sup>6</sup> Automatic gearbox

<sup>4</sup> When the display's message Distance to empty fuel tank: starts to show ----, the marking becomes red.

## Instruments and controls



- 1 Instantaneous value
- 2 Average value

### Instantaneous value

The instantaneous value is shown here - the higher the reading on the scale, the better.

The instantaneous value is calculated based on speed, engine speed, engine power utilised plus use of the foot brake.

Optimum speed (50-80 km/h) and low engine speeds are encouraged. The pointers fall during acceleration and braking.

Very low instantaneous values illuminate the red zone on the meter (with a short delay), which means poor driving economy and hence should be avoided.

### Average value

The average value slowly follows the instantaneous value and describes how the car has been driven most recently. The higher the pointers on the scale, the better the driving economy achieved by the driver.

### Power guide

This instrument shows the relationship between how much power (Power) is being taken from the engine and how much power is available.

To view this function, select the theme Performance, see page 73.



- 1 Available engine power
- 2 Engine power utilised

### Available power

The smaller, upper pointer shows the available engine power<sup>7</sup>. The higher the reading on the scale, the more power is available in the current gear.

### Utilised power

The larger, lower pointer shows the engine power utilised<sup>7</sup>. The higher the reading on the scale, the more power is being taken from the engine.


A large gap between the two pointers indicates a large power reserve.

<sup>7</sup> Power is dependent on engine speed.




## Instruments and controls

## Indicator and warning symbols

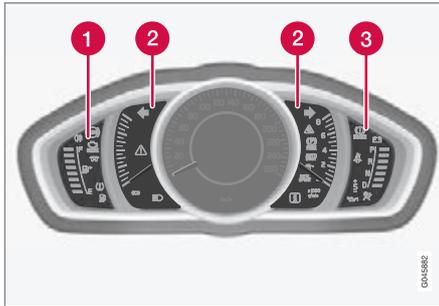

Indicator and warning symbols, analogue instrument panel.

- 1 Indicator symbols
- 2 Indicator and warning symbols
- 3 warning symbols<sup>8</sup>

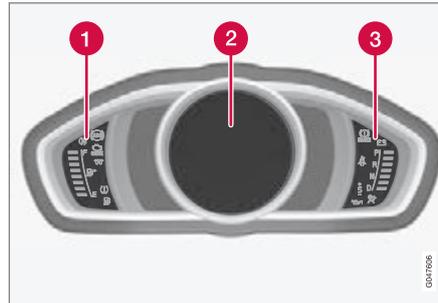

Indicator and warning symbols, digital instrument panel.

- 1 Indicator symbols
- 2 Indicator and warning symbols
- 3 Warning symbols<sup>8</sup>

## Functionality check

All indicator and warning symbols illuminate in key position **II** or when the engine is started. When the engine has started, all the symbols should go out except the parking brake symbol, which only goes out when the brake is disengaged.

If the engine does not start or if the functionality check is carried out in key position **II** then all symbols go out within 5 seconds

except the symbol for faults in the car's emissions system and the symbol for low oil pressure.

## Indicator symbols

Symbol	Specification
	ABL fault
	Emissions system
	ABS fault
	Rear fog lamp on
	Stability system
	Stability system, sport mode
	Engine preheater (diesel)
	Low level in fuel tank
	Information, read display text
	Main beam On

<sup>8</sup> For certain engine variants, the symbol for low oil pressure is not used. Warnings are made via display text. For information on checking the oil level, see page 339.



# 03 Your driving environment

## Instruments and controls

Symbol	Specification
	Left-hand direction indicator
	Right-hand direction indicator
	Start/Stop, the engine auto-stopped, see page 125

### ABL fault

The symbol illuminates if a fault has arisen in the ABL function (Active Bending Lights).

### Emissions system

If the symbol illuminates then it may be due to a fault in the car's emissions system. Drive to a workshop for checking. Volvo recommends that you seek assistance from an authorised Volvo workshop.

### ABS fault

If this symbol illuminates then the system is not working. The car's regular brake system continues to work, but without the ABS function.

1. Stop the car in a safe place and turn off the engine.
2. Restart the engine.
3. If the symbol remains illuminated, drive to a workshop to have the ABS system checked. Volvo recommends that you

seek assistance from an authorised Volvo workshop.

### Rear fog lamp on

This symbol illuminates when the rear fog lamp is switched on.

### Stability system

A flashing symbol indicates that the stability system is operating. If the symbol illuminates with constant glow then there is a fault in the system.

### Stability system, sport mode

Sport mode allows for a more active driving experience. The system then detects whether the accelerator pedal, steering wheel movements and cornering are more active than in normal driving and then allows controlled skidding of the rear section up to a certain level before it intervenes and stabilises the car.

### Engine preheater (diesel)

This symbol illuminates during engine preheating. Preheating mostly takes place due to low temperature.

### Low level in fuel tank

When the symbol illuminates the level in the fuel tank is low, refuel as soon as possible.

### Information, read display text

When one of the car's systems does not behave as intended, this information symbol

illuminates and a text appears on the information display. The message text is cleared with the **OK** button, see page 204, or it disappears automatically after a time (time depending on which function is indicated). The information symbol can also illuminate in conjunction with other symbols.



### NOTE

When a service message is shown, the symbol and message are cleared using the **OK** button, or disappear automatically after a time.

### Main beam On

The symbol illuminates when main beam is on and with main beam flash.

### Left/right-hand direction indicators

Both direction indicator symbols flash when the hazard warning flashers are used.

### Start/Stop

The symbol shines when the engine is auto-stopped.



## Instruments and controls

## Warning symbols

Symbol	Specification
	Low oil pressure <sup>A</sup>
	Parking brake applied
	Parking brake applied, alternative symbol
	Airbags – SRS
	Seatbelt reminder
	Alternator not charging
	Fault in brake system
	Warning

<sup>A</sup> For certain engine variants, the symbol for low oil pressure is not used. Warnings are made via display text, see pages 339 and 341.

## Low oil pressure

If this symbol illuminates during driving then the engine's oil pressure is too low. Stop the engine immediately and check the engine oil level, top up if necessary. If the symbol illuminates and the oil level is normal, contact a workshop. Volvo recommends that you seek

assistance from an authorised Volvo workshop.

## Parking brake applied

This symbol illuminates with a constant glow when the parking brake is applied. The symbol is illuminated during application. For more information, see page 133.

## Airbags – SRS

If this symbol remains illuminated or illuminates while driving, it means a fault has been detected in the seatbelt buckle, SRS, SIPS, or IC systems. Drive immediately to a workshop to have the system checked. Volvo recommends that you seek assistance from an authorised Volvo workshop.

## Seatbelt reminder

This symbol flashes if someone in a front seat has not put on their seatbelt or if someone in a rear seat has taken off their seatbelt.

## Alternator not charging

This symbol illuminates during driving if a fault has occurred in the electrical system. Visit a workshop. Volvo recommends that you seek assistance from an authorised Volvo workshop.

## Fault in brake system

If this symbol illuminates, the brake fluid level may be too low. Stop the car in a safe place and check the level in the brake fluid reservoir, see page 343.

If the brake and ABS symbols illuminate at the same time, there may be a fault in the brake force distribution system.

1. Stop the car in a safe place and turn off the engine.
2. Restart the engine.

- If both symbols extinguish, continue driving.
- If the symbols remain illuminated, check the level in the brake fluid reservoir, see page 343. If the brake fluid level is normal but the symbols are still illuminated, the car can be driven, with great care, to a workshop to have the brake system checked. Volvo recommends that you seek assistance from an authorised Volvo workshop.

 **WARNING**

If the brake fluid is below the **MIN** level in the brake fluid reservoir, do not drive further before topping up the brake fluid.

The loss of brake fluid must be investigated by a workshop. Volvo recommends that you contact an authorised Volvo workshop.

## Instruments and controls

**! WARNING**

If the BRAKE and ABS symbols are lit at the same time, there is a risk that the rear end will skid during heavy braking.

**Warning**

The red warning symbol illuminates when a fault has been indicated which could affect the safety and/or driveability of the car. An explanatory text is shown on the information display at the same time. The symbol remains visible until the fault has been rectified but the text message can be cleared with the **OK** button, see page 205. The warning symbol can also illuminate in conjunction with other symbols.

**Action:**

1. Stop in a safe place. Do not drive the car further.
2. Read the information on the information display. Implement the action in accordance with the message in the display. Clear the message using the **OK** button.

**Reminder – doors not closed**

If one of the doors is not closed properly then the information or warning symbol illuminates together with an explanatory image in the

information display. Stop the car in a safe place as soon as possible and close the door that is open.

 If the car is driven at a speed lower than approx. 7 km/h then the information symbol illuminates.

 If the car is driven at a speed higher than approx. 7 km/h then the warning symbol illuminates.

If the bonnet<sup>9</sup> is not closed properly then the warning symbol illuminates together with an explanatory image in the information display. Stop the car in a safe place as soon as possible and close the bonnet.

If the tailgate is not closed properly then the information symbol illuminates together with an explanatory image in the information display. Stop the car in a safe place as soon as possible and close the tailgate.

**Trip meter**

*Trip meter.*

- 1 Display for trip meter<sup>10</sup>

The two trip meters **T1** and **T2** are used for measuring short distances. The distance is shown in the display.

Turn the left stalk switch thumbwheel to show the required meter.

A long press (until the change occurs) on the left-hand stalk switch's **RESET** button resets the trip meter shown. For more information, see page 232.

<sup>9</sup> Only cars with alarm\*.

<sup>10</sup>The appearance of the display may vary depending on variant.



## Instruments and controls

## Clock



Clock, digital instrument panel.

- 1 Display for showing the time<sup>11</sup>

## Set the clock

The clock can be adjusted in the menu group **MY CAR**, for more information see page 207.



1. Locate **Settings** → **System options** → **Time**.
2. The cursor is located in the first box for Hour: Press **OK/MENU** - the box is activated.
3. Turn **TUNE** to set the correct hour and press **OK/MENU** - the box is deactivated.
4. Turn **TUNE** to select the box for Minute (A) and press **OK/MENU** - the box is activated (B).
5. Turn **TUNE** to set the correct minute and press **OK/MENU** - the box is deactivated.
6. Turn **TUNE** to select the box for **OK** and press **OK/MENU** - the setting is complete.

The menu option **Settings** → **System options** → **Time format** selects the 24h or 12h system (AM/PM).


<sup>11</sup>The time is shown in the middle of the instrument panel when an analogue instrument panel is fitted.



## 03 Your driving environment

### Volvo Sensus

#### General

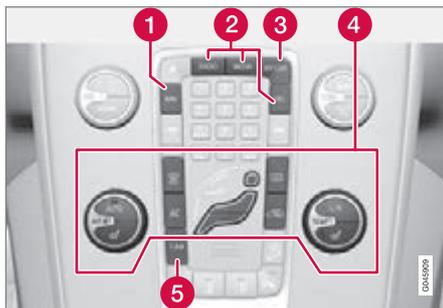

Control panel in centre console

- 1 Navigation\* - **NAV**, see separate owner's manual (Road and Traffic Information System - RTI).
- 2 Infotainment (**RADIO, MEDIA, TEL\***), see page 248.
- 3 Car settings - **MY CAR**, see page 207.
- 4 Climate control, see page 215.
- 5 Park assist camera - **CAM\***, see page 189.

Volvo Sensus is the car's operating system, the heart of your personal Volvo experience. Volvo Sensus combines and presents many functions in several of the car's systems in the screen. With Volvo Sensus the car can be

personalised by means of an intuitive user interface. Settings can be made in Car settings, Infotainment, Climate, etc.

With the centre console buttons and controls or the steering wheel's right-hand keypad\* functions can be activated or deactivated and many different settings can be made.

With a press on **MY CAR** all settings related to the driving and control of the car are presented, such as City Safety, Locks and alarm, setting the clock, etc.

With a press on the respective function: **RADIO, MEDIA, TEL\***, **NAV\*** and **CAM\*** other sources, systems and functions can be activated, e.g. AM, FM1, CD, DVD\*, TV\*, Bluetooth\*, navigation\* and park assist camera\*.

For more information on all functions/systems, see the respective section in the owner's manual.



## Key positions

### Insert and remove the remote control key



Ignition switch with remote control key extracted/inserted.

#### **i** NOTE

For cars with the Keyless\* function the key does not need to be inserted into the ignition switch but can be stored in e.g. a pocket. For more information on Keyless functions - see page 52.

### Insert the key

1. Hold the end of the remote control key with the detachable key blade and insert the key in the ignition switch.
2. Then press the key in the lock up to its end position.

#### **!** IMPORTANT

Foreign objects in the ignition switch can impair the function or destroy the lock.

Do not press in the remote control key incorrectly turned - Hold the end with the detachable key blade, see page 49.

### Withdraw the key

- Push the remote control key, allow it to eject, then pull it out from the ignition switch.

### Functions at different levels

In order to enable the use of a limited number of functions with the engine switched off, the car's electrical system can be set in 3 different levels (key positions) - **0**, **I** and **II** - with the remote control key. Throughout this owner's manual these levels are described using the denomination "key positions".

The following table shows the functions available in each key position/level.

Level	Functions
<b>0</b>	<p>Odometer, clock and temperature gauge are illuminated.</p> <p>Power seats can be adjusted.</p> <p>The audio system can be used for a limited time - see page 248.</p>
<b>I</b>	<p>Sun visor for glass roof, power windows, 12 V socket in the passenger compartment, RTI, phone, ventilation fan and windscreen wipers can be used.</p>
<b>II</b>	<p>The headlamps come on.</p> <p>Warning/indicator lamps illuminate for 5 seconds.</p> <p>Several other systems are activated. However, heating in seat cushions and the rear window can only be activated after the engine has been started.</p> <p><b>This key position consumes a lot of current from the starter battery and should therefore be avoided!</b></p>

03



## 03 Your driving environment

### Key positions

#### Choosing key position/level

##### Key position 0

- Unlock the car - this means that the car's electrical system is at level **0**.

##### Key position I

- With the remote control key fully inserted into the ignition switch<sup>1</sup> - Briefly press **START/STOP ENGINE**.

#### **i** NOTE

To reach level **I** or **II** **without** starting the engine - do **not** depress the brake/clutch pedal when these key positions are due to be selected.

##### Key position II

- With the remote control key fully inserted into the ignition switch<sup>1</sup> - Give a long<sup>2</sup> press on **START/STOP ENGINE**.

##### Back to key position 0

- To return to key position **0** from position **II** and **I** - Briefly press on **START/STOP ENGINE**.

#### Audio system

For information on the audio system's functions with remote control key removed - see page 248.

#### Starting and stopping the engine

For information about starting/switching off the engine - see page 115.

#### Towing

For important information about the remote control key during towing - see page 315.

<sup>1</sup> Not necessary for cars with the Keyless\* function.

<sup>2</sup> Approx. 2 seconds.



## Seats

## Front seats




- 1 To adjust lumbar support\*, turn the wheel<sup>1</sup>.
- 2 Forward/backward: lift the handle to adjust the distance to the steering wheel and pedals. Check that the seat is locked after changing position.
- 3 To raise/lower the front edge of seat cushion\*, pump up/down.
- 4 Adjust backrest rake, turn the wheel.
- 5 Raise/lower the seat\*, pump up/down.
- 6 Control panel for power seat\*.

<sup>1</sup> Also applies to power seat.

**WARNING**

Adjust the position of the driver's seat before setting off, never while driving. Make sure that the seat is in locked position in order to avoid personal injury in the event of sudden braking or an accident.

## Adjusting front seat head restraints

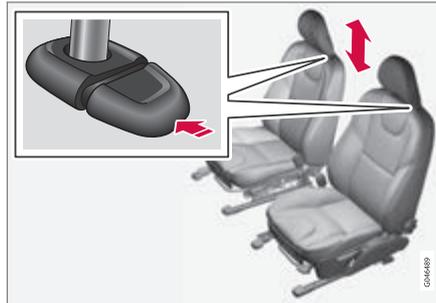


*The height of the front seat head restraints can be adjusted.*

Adjust the head restraint based on the person's height so that the whole of the back of the head is covered if possible.

To adjust the height, the button (see illustration) must be pressed while the restraint is moved up or down.

The head restraint can be adjusted in three different positions.

## Lowering the front seat backrest\*

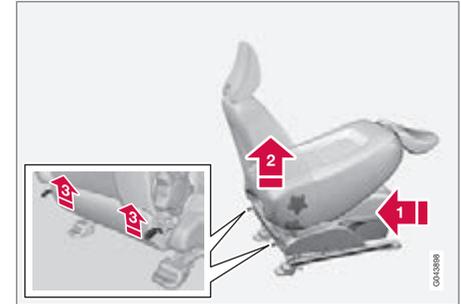

The passenger seat backrest can be folded forward to make room for long loads.

- 1 Move the seat as far back/down as possible.
- 2 Adjust the backrest to an upright position.
- 3 Lift the catches on the rear of the backrest and fold it forward.
- 4 Push the seat forward so that the head restraint "locks" in under the glovebox.

Raising takes place in reverse order.

## Seats


### WARNING

Do not use the space behind the front seat, or the rear seat's centre seat, when the front seat backrest is lowered.

### WARNING

Grasp the backrest and make sure that it is properly locked after being folded up in order to avoid personal injury in the event of sudden braking or an accident.

### Power seat\*

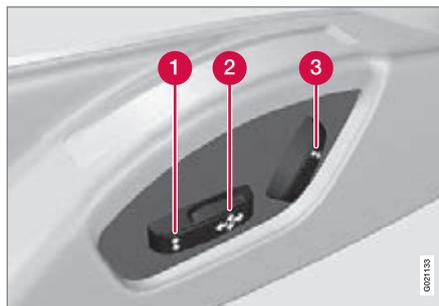

- 1 Front edge of seat cushion up/down
- 2 Seat forward/backward and up/down
- 3 Backrest rake

The power front seats have overload protection which is tripped if a seat is blocked by an object. If this happens, go to key position I or 0 and wait a short time before adjusting the seat again.


Only one movement (forward/back/up/down) can be made at a time.

### Preparations

The seats can be adjusted for a certain time after unlocking the door with the remote control key without the key in the ignition switch.

Seat adjustment is normally made in key position I and can always be made when the engine is running.

### Seat with memory function\*

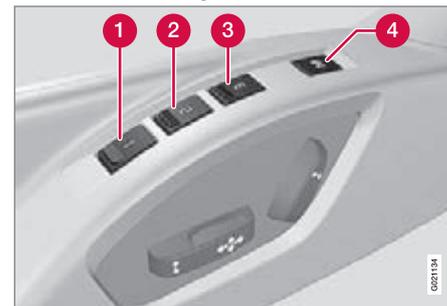

### Store setting

- 1 Memory button
- 2 Memory button
- 3 Memory button
- 4 Button for storing settings


1. Adjust the seat and the door mirrors.
2. Hold the button depressed to store settings while depressing one of the memory buttons.



### Using a stored setting

Hold one of the memory buttons depressed until the seat and the door mirrors stop. If you release the button then the movement of the seat will stop.

### Key memory\* in remote control key<sup>2</sup>

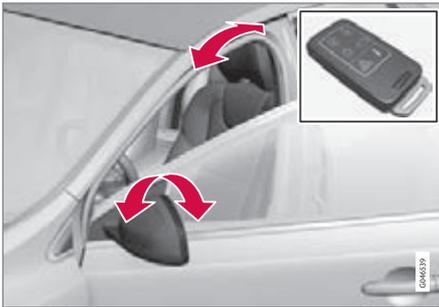

All remote control keys can be used by different drivers to store the settings for the driver's seat and door mirrors<sup>3</sup>. Proceed as follows:

- Adjust the seat as you want it.
- Lock the car by pressing the lock button on the remote control key that you normally use. This stores the positions of the

seat and door mirrors in the remote control key's memory<sup>4</sup>.

- Unlock the car (by pressing the unlock button on the **same** remote control key) and open the driver's door. The driver's seat and door mirrors will automatically adopt the positions that are stored in the remote control key's memory (if the seat has been moved since you locked the car).

The key memory can be activated/deactivated in the menu system **MY CAR** under **Settings** → **Car settings** → **Car key memory**. For a description of the menu system, see page 207.

### Emergency stop

If the seat accidentally begins to move, press one of the setting buttons for the seat or memory buttons in order to stop the seat.

Restarting to reach the seat position stored in the key memory is performed by pressing the unlock button on the remote control key. The driver's door must then be open.

### WARNING


Risk of crushing! Make sure that children do not play with the controls. Check that there are no objects in front of, behind or under the seat during adjustment. Ensure that none of the rear seat passengers is in danger of becoming trapped.

### Heated seats

For heated seats, see page 219.

### Rear seats

#### Head restraint, centre seat, rear

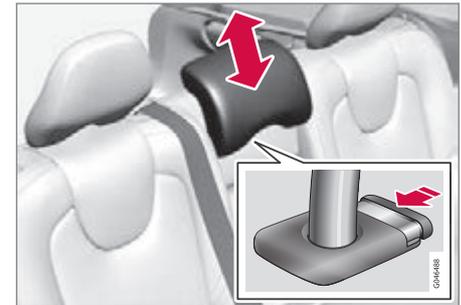

<sup>2</sup> For key memory for Keyless function, see page 54.

<sup>3</sup> Only if the car is equipped with power seat with memory and retractable power door mirrors.

<sup>4</sup> This setting does not affect settings that have been stored in the power seat's memory function.

## Seats

Adjust the head restraint according to passenger height so that the whole of the back of the head is covered if possible. Slide it up as required.


To lower the head restraint again, the button (see illustration) must be pressed while the restraint is carefully moved down.

The head restraint can be adjusted in five different positions.

### NOTE

Do not sit in the centre seat with the head restraint in fully lowered position.

### Manual lowering of the outer head restraints, rear seat

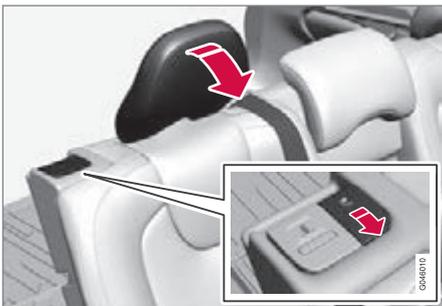

Pull the locking handle closest to the head restraint to fold the head restraint forward. The head restraint is moved back manually.

### WARNING

The head restraint must be in locked position after being folded up.

### Lowering the rear seat backrest

### IMPORTANT



When the backrest is to be folded, the rear seat cup holder must not be open and there must be no objects in the rear seat. Nor may the seat belts be connected. Otherwise there is a risk of damage to the rear seat upholstery.

The two-section backrest can be folded in different ways.

### NOTE

The front seats may need to be pushed forwards, and/or the backrests adjusted upwards, in order that the rear backrests can be folded forward fully.

- Both sections can be folded separately.
- If the entire backrest is to be folded then the different sections should be folded separately.

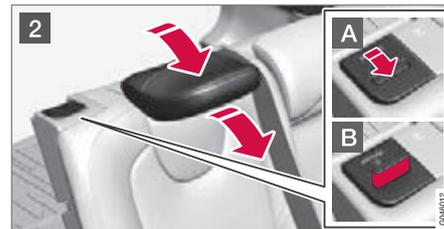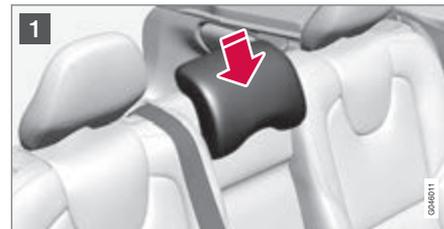

- 1 If the right-hand section is being lowered - release and adjust the centre seat head restraint downwards, see page 85.
- 2 The outer head restraints are lowered automatically when the backrests are lowered. Pull up the backrest's locking



handle **A** while folding the backrest forward at the same time. A red indicator on the lock catch **B** shows that the backrest is no longer locked in place.

**i** NOTE

When the backrests have been lowered the head restraints must be moved forward slightly so as not to make contact with the seat cushion.

Raising takes place in reverse order.

**i** NOTE

When the backrest has been raised, the red indicator should no longer be showing. If it is still showing then the backrest is not locked in place.


**!** WARNING

Check that the backrests and head restraints in the rear seat are locked properly after being folded up.



## Steering wheel

### Adjusting

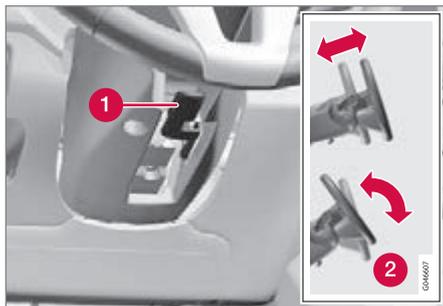

Adjusting the steering wheel.

- 1 Lever - releasing the steering wheel
- 2 Possible steering wheel positions

The steering wheel can be adjusted for both height and depth:

1. Push the lever forwards to release the steering wheel.
2. Adjust the steering wheel to the position that suits you.
3. Pull the lever back to fix the steering wheel in place. If the lever is stiff, press the steering wheel lightly at the same time as you push the lever back.

### WARNING

Adjust the steering wheel and fix it before driving away.

With speed related power steering\* the level of steering force can be adjusted, see page 240.

### Keypads\*



Keypads in the steering wheel.

- 1 Cruise control, see page 148
- Adaptive cruise control, see page 150
- 2 Audio and phone control, see page 249.

### Horn




Horn.

Press the centre of the steering wheel to signal.



## Lighting

## Light switches

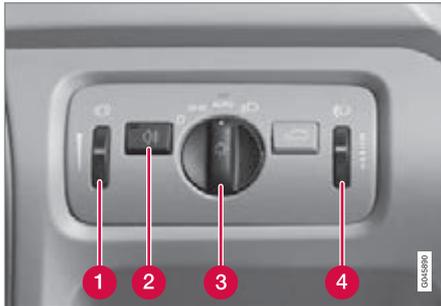

Overview, light switches.

- 1 Thumbwheel for adjusting display and instrument lighting and ambient lighting\*
- 2 Button for rear fog lamp
- 3 Knob for daytime running lights and parking lamps
- 4 Thumbwheel<sup>1</sup> for headlamp levelling

## Knob positions

Position	Specification
0	Daytime running lights <sup>A</sup> when the car's electrical system is in key position <b>II</b> or the engine is running. Main beam flash can be used.
	Daytime running lights and position/parking lamps/side marker lamps when the car's electrical system is in key position <b>II</b> or the engine is running. Automatic switching to position/parking lamps/side marker lamps when the car is parked. Main beam flash can be used.

Position	Specification
AUTO	Daytime running lights and position/parking lamps/side marker lamps during the day when the car's electrical system is in key position <b>II</b> or the engine is running. Automatic switching to dipped beam and position/parking lamps/side marker lamps in poor light conditions or when the windscreen wipers or rear fog lamps are activated. The "Tunnel detection*" function is activated, see page 91. The "Active high beam*" function can be used, see page 92. Main beam can be activated when dipped beam is switched on. Main beam flash can be used.

<sup>1</sup> Not available for cars equipped with active Xenon headlamps\*.



## Lighting

03

Position	Specification
	Dipped beam and position/parking lamps/side marker lamps. Main beam can be activated. Main beam flash can be used.

A Fitted in or under the front bumper.

Volvo recommends that **AUTO** mode is used when the car is being driven, as long as traffic situations or weather conditions are unfavourable for the "Active high beam\*" function.

### Instrument lighting

Different display and instrument lighting is switched on depending on key position, see page 81.

The display lighting is automatically subdued in darkness - the sensitivity is set with the thumbwheel.


The intensity of the instrument lighting is adjusted with the thumbwheel.

### Headlamp levelling

The load in the car changes the vertical alignment of the headlamp beam, which could dazzle oncoming motorists. Avoid this by

adjusting the height of the beam. Lower the beam if the car is heavily laden.

1. Leave the engine running, or have the car's electrical system in key position I.
2. Roll the thumbwheel up/down to raise/lower beam alignment.

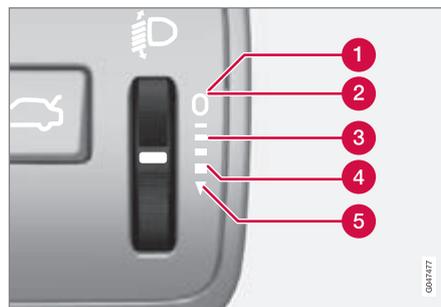


Thumbwheel positions for different load cases.

- 1 Only driver
- 2 Driver and passenger in the front passenger seat
- 3 Occupants in all seats
- 4 Occupants in all seats and maximum load in the cargo area
- 5 Driver and maximum load in the cargo area

Cars with active Xenon headlamps\* have automatic headlamp levelling and are therefore not equipped with the thumbwheel.

### Position/parking lamps

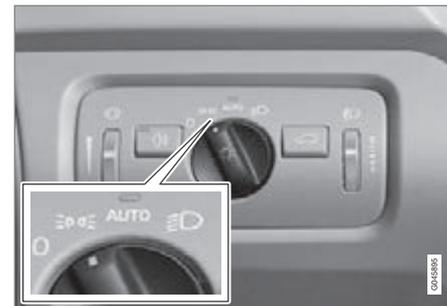

Knob for headlamp control in the position for position/parking lamps.

Turn the knob to the position for position/parking lamps (number plate lighting is switched on at the same time).

If the car's electrical system is in key position II or the engine is running then the daytime running lights are also switched on.

When it is dark outside and the tailgate is opened the rear position/parking lamps illuminate to alert traffic behind. This takes place irrespective of what position the knob is in or



## Lighting

what key position the car's electrical system is in.

### Daytime running lights during the day. DRL



Knob for headlamp control in **AUTO** position.

With the knob for headlamp control in **AUTO** position the daytime running lights (Daytime Running Lights - DRL) are activated automatically when the car is driven during daytime. A light sensor on the top of the instrument panel changes from daytime running lights to dipped beam at twilight or when daylight becomes too weak. Changing to dipped beam also takes place if the windscreen wipers or rear fog lamps are activated.

### WARNING

This system help to save energy - it cannot determine in all situations when daylight is too weak or sufficiently strong, e.g. in mist and rain.

The driver is always responsible for ensuring that the car is driven with its lights in a correct state and in accordance with applicable traffic regulations.

### Tunnel detection\*

The function is available in cars with rain sensor\*. The sensor detects the entrance to a tunnel and resets the lighting from daytime running lights to dipped beam. Approx. 20 seconds after the car has left the tunnel, the lighting returns to daytime running lights. If the car is driven into another tunnel within this time period then dipped beam is kept switched on. This prevents frequent changes to the car lighting.

Note that the headlamp control's knob must remain in **AUTO** position for tunnel detection to work.

### Main/dipped beam



Stalk switch and knob for headlamp control.

-  Position for main beam flash
-  Position for main beam

### Dipped beam

With the knob in **AUTO** position, dipped beam is activated automatically at dusk or when daylight becomes too weak. Dipped beam is also activated automatically if the windscreen wipers or rear fog lamps are activated.

With the knob in  position, dipped beam is always switched on when the engine is running or when key position II is active.

### Main beam flash

Move the stalk switch gently towards the steering wheel to the position for main beam

\* Option/accessory, for more information, see Introduction.



## 03 Your driving environment

### Lighting

flash. Main beam comes on until the stalk switch is released.

#### Main beam

Main beam can be activated when the knob is in position **AUTO**<sup>2</sup> or . Activate/deactivate main beam by moving the stalk switch towards the steering wheel to the end position and then releasing. Alternatively, the main beam can be deactivated by a light press of the stalk switch toward the steering wheel.

When main beam has been activated the  symbol illuminates in the combined instrument panel.

#### Active high beam - AHB\*


Active high beam (Active High Beam - AHB) is a function which uses a camera sensor at the top edge of the windscreen to detect the headlamp beams of oncoming traffic or the rear lights of vehicles in front, and then switches from main beam to dipped beam. The function can also take streetlights into account.

The lighting returns to main beam about a second after the camera sensor no longer detects the headlamp beams from oncoming traffic or the rear lights from vehicles in front.

<sup>2</sup> When dipped beam is activated.

#### Activating/deactivating

AHB can be activated when the headlamp control's knob is in position **AUTO**.

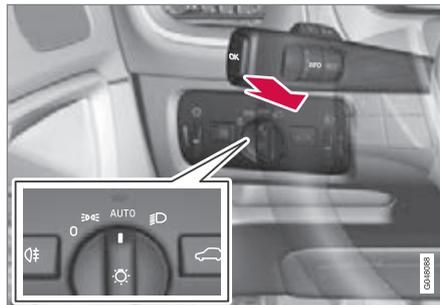

Stalk switch and knob for headlamp control in **AUTO** position.

The function can start while driving in the dark when the car's speed is 20 km/h or higher.

Activate/deactivate AHB by moving the left-hand stalk switch towards the steering wheel to the end position and then releasing. Deactivation when main beam is on means that the lights are reset directly to dipped beam.

#### Car with analogue combined instrument panel

When AHB is activated the  symbol illuminates in the instrument's information display.

When main beam has been switched on the  symbol also illuminates in the combined instrument panel.

#### Car with digital combined instrument panel

When AHB is activated the  symbol turns white in the instrument's information display.

When main beam is activated, the symbol shines blue.

#### Manual operation



#### NOTE

Keep the windscreen surface in front of the camera sensor free from ice, snow, mist and dirt.

Do not stick or attach anything to the windscreen in front of the camera sensor as this may reduce effectiveness or cause one or more of the systems dependent on the camera to stop working.

If the message **Active main beam** **Temporary unavailable** Switch manually is



## Lighting

shown in the combined instrument panel's information display then you have to switch manually between main and dipped beam. However, the knob for headlamp control is still in position **AUTO**. The same applies if the message **Windscreen sensors blocked** See manual and the  symbol are shown. The  symbol goes out when these messages are shown.

AHB may be temporarily unavailable e.g. in situations with dense fog or heavy rain. When AHB becomes available again, or the windscreen sensors are no longer blocked, the message goes out and the  symbol illuminates.

### WARNING

AHB is an aid for using optimum light composition when conditions are favourable.

The driver always bears responsibility for manually switching between main and dipped beam when traffic situations or weather conditions so require.

### IMPORTANT

Examples of when manual switching between main and dipped beam may be required:

- In heavy rain or dense fog
- In freezing rain
- In snow flurries or slush
- In moonlight
- When driving in poorly lit built-up areas
- When the traffic ahead has weak lighting
- If there are pedestrians on or beside the road
- If there are highly reflective objects such as signs in the vicinity of the road
- When the lighting from oncoming traffic is obscured by e.g. a crash barrier
- When there is traffic on connecting roads
- On the brow of a hill or in a hollow
- In sharp bends.

For more information on the limitations of the camera sensor, see page 175.

### Active Xenon headlamps ABL\*



Headlamp pattern with function deactivated (left) and activated (right) respectively.

If the car is equipped with active Xenon headlamps (Active Bending Lights – ABL) then the light from the headlamps follows the steering wheel movement in order to provide maximum lighting in bends and junctions and so provide increased safety.

The function is activated automatically when the car is started (provided that it has not been deactivated in the menu system **MY CAR**). In the event of a fault in the function the  symbol illuminates in the combined instrument panel at the same time as the information display shows an explanatory text and a further illuminated symbol.

\* Option/accessory, for more information, see Introduction.




## Lighting

Symbol	Display	Specification
	<b>Headlamp system malfunction Service required</b>	The system is disengaged. Visit a workshop if the message remains. Volvo recommends that you contact an authorised Volvo workshop.

The function is only active in twilight or darkness and only when the car is moving.

The function<sup>3</sup> can be deactivated/ activated in the menu system **MY CAR** under **Settings** → **Car settings** → **Light settings** → **Active Bending Lights**. For a description of the menu system, see page 208.

### Rear fog lamp

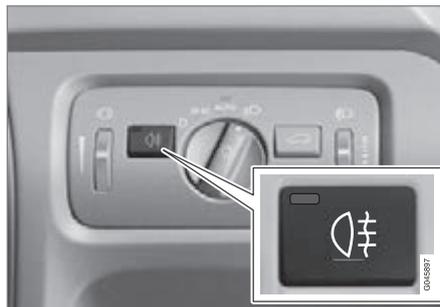

Button for rear fog lamp.

The rear fog lamp can only be switched on when key position **II** is active or the engine is running and the headlamp control's knob is in position **AUTO** or **☰**.

Press the button for On/Off. The rear fog lamp indicator symbol in the combined instrument panel and the lamp in the button illuminate when the rear fog lamp is switched on.


The rear fog lamp is switched off automatically when the engine is switched off or when the headlamp control's knob is turned to position **0** or **☰☰**.

**NOTE**  
Regulations on the use of rear fog lamps vary from country to country.

### Brake lights

The brake light automatically comes on during braking. For information on the emergency brake lights and automatic hazard warning flashers, see page 131.

### Hazard warning flashers

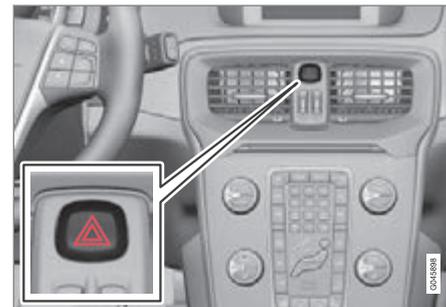

Button for hazard warning flashers.

Press the button to activate the hazard warning flashers. Both direction indicator symbols

<sup>3</sup> Activated on delivery from the factory.



## Lighting

in the combined instrument panel flash when the hazard warning flashers are used.

The hazard warning flashers are activated automatically when the car has been braked so suddenly that the emergency brake lights have been activated at a speed below 10 km/h. The hazard warning flashers remain on when the car has stopped and are deactivated automatically when the car is driven off again or the button is depressed. For more information on emergency brake lights and automatic hazard warning flashers, see page 131.

### Direction indicators/flashers



Direction indicators/flashers.

### Short flash sequence

➔ Move the stalk switch up or down to the first position and release. The direction indicators flash three times. The function can be activated/deactivated in the menu system **MY CAR** under **Settings** → **Car settings** → **Light settings** → **Triple indicator**. For a description of the menu system, see page 208.

### Continuous flash sequence

➔ Move the stalk switch up or down to the outer position.

The stalk switch remains in its position and is moved back manually, or automatically by the steering wheel movement.

### Direction indicator symbols

For direction indicator symbols, see page 75.

### Interior lighting



Controls in roof console for the front reading lamps and passenger compartment lighting.

- ➊ Reading lamp, left-hand side
- ➋ Passenger compartment lighting (floor lamps\* and ceiling lamps) - On/Off
- ➌ Auto function for passenger compartment lighting
- ➍ Reading lamp, right-hand side

All lighting in the passenger compartment can be switched on and off manually within 30 minutes from when:

- the engine has been switched off and the car's electrical system is in key position **0**
- the car has been unlocked but the engine has not been started.

## Lighting

### Front reading lamps\*

The reading lamps are switched on or off by briefly pressing the relevant button in the roof console.

Brightness is adjusted by holding the button pressed in.

### Rear reading lamps\*



Rear reading lamps.

The lamps are switched on or off by briefly pressing the relevant button.

Brightness is adjusted by holding the button pressed in.

### Floor lighting as ambient light\*

To make the interior brighter while driving the floor lighting can be activated at dimmed level.

Floor lamp intensity can be changed in the **MY CAR** menu system under **Settings** → **Car settings** → **Light settings** → **Interior light** → **Floor lights**. Select from **Off**, **Low** and **High**. For more information on the **MY CAR** menu system, see page 209.

### Lighting in the front door storage compartments\*

Lighting in the front door storage compartments comes on when the engine starts.

### Glovebox lighting

Glovebox lighting is switched on and off respectively when the lid is opened or closed.

### Vanity mirror lighting

The lighting for the vanity mirror, see page 243, is switched on and off respectively when the cover is opened or closed.

### Lighting in the cargo area

The lighting in the cargo area is switched on and off respectively when the tailgate is opened or closed.

### Auto function for passenger compartment lighting

The auto function is activated when the lamp in the **AUTO** button is lit.

The passenger compartment lighting is then switched on and off as indicated below.

The passenger compartment lighting is switched on and remains on for 30 seconds if:

- the car is unlocked with the remote control key or key blade, see pages 46 or 49
- the engine has been switched off and the car's electrical system is in key position **0**.

Passenger compartment lighting is switched off when:

- the engine is started
- the car is locked.

The passenger compartment lighting is switched on and off respectively when a side door is opened or closed.

It remains switched on for two minutes if one of the doors is open.

If any lighting is switched on manually and the car is locked then it will be switched off automatically after two minutes.

### Mood lights\*

When the normal passenger compartment lighting is switched off and the engine is running, an LED illuminates in the front and rear roof console respectively in order to provide a low light and enhance the ambience while



## Lighting

driving. The light also makes it easier to see objects in the storage compartments, etc. when it is dark outside. Light intensity can be changed in the **MY CAR** menu system under **Settings → Car settings → Light settings → Interior light → Ambient light**. Select from **Off**, **Low** and **High**. This lighting extinguishes when the engine is switched off.

The colour of the light can be also set in the **MY CAR** menu system under **Settings → Car settings → Light settings → Interior light → Ambient light colours**. If you select **Temperature**, the colour shifts between warm white and cold white depending on the temperature in the car or you can choose between different colour themes. The available colour themes are **Frosty White**, **Toscana White**, **Ember Gold**, **Red Sunset**, **Rainforest**, **Glacier Blue** and **Violet Purple**. For more information on the **MY CAR** menu system, see page 209.

### Home safe light duration

Some of the exterior lighting can be kept switched on to work as home safe lighting after the car has been locked.

1. Remove the remote control key from the ignition switch.
2. Move the left-hand stalk switch toward the steering wheel to the end position and release it. The function can be activated in the same way as with main beam flash, see page 91.
3. Get out of the car and lock the door.

When the function is activated, dipped beam, parking lamps, door mirror lamps, number plate lighting, interior roof lighting and floor lighting are switched on.

The length of time for which the home safe lighting should be kept on can be set in the menu system **MY CAR** under **Settings → Car settings → Light settings → Home safe light duration**. For a description of the menu system, see page 208.


### Approach light duration

Approach lighting is switched on with the remote control key, see page 46, and is used to switch on the car's lighting at a distance.

When the function is activated with the remote control, the parking lamps, door mirror lamps, number plate lighting, interior roof lighting and floor lighting are switched on.

The length of time for which the approach lighting should be kept on can be set in the menu system **MY CAR** under **Settings → Car settings → Light settings → Approach light duration**. For a description of the menu system, see page 208.


### Adjusting headlamp pattern

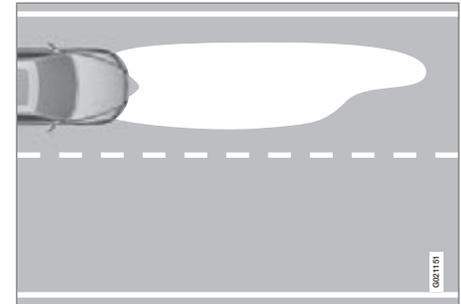

Headlamp pattern, left-hand traffic.



### Lighting

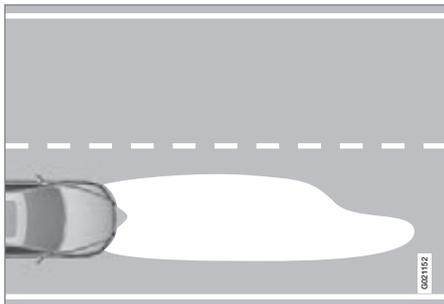

*Headlamp pattern, right-hand traffic.*

The headlamp pattern must be adjusted to avoid dazzling oncoming motorists and can be set for right or left-hand traffic.

#### **Active Xenon headlamps\***

The light pattern does not need to be adjusted. The headlamp pattern is designed in such a way that oncoming traffic is not dazzled.

#### **Halogen headlamps**

The headlamp pattern for halogen headlamps is readjusted by masking the headlamp lens. The headlamp pattern may not be as good.

#### **Masking the headlamps**

1. Copy the A and B templates for left-hand drive cars or the C and D templates for


right-hand drive cars see page 100. The template scale is 1:2. Use a photocopier with a zoom function to copy the templates at 200 %:

- A = LHD Right (left-hand drive, right lens)
  - B = LHD Left (left-hand drive, left lens)
  - C = RHD Right (right-hand drive, right lens)
  - D = RHD Left (right-hand drive, left lens)
2. Transfer the template to a self-adhesive waterproof material and cut it out.
  3. Start from the design lines on the headlamp lenses; see the lines on page 99. Position the self-adhesive templates at the design lines with the help of the illustration.



## Lighting

## Aligning the templates

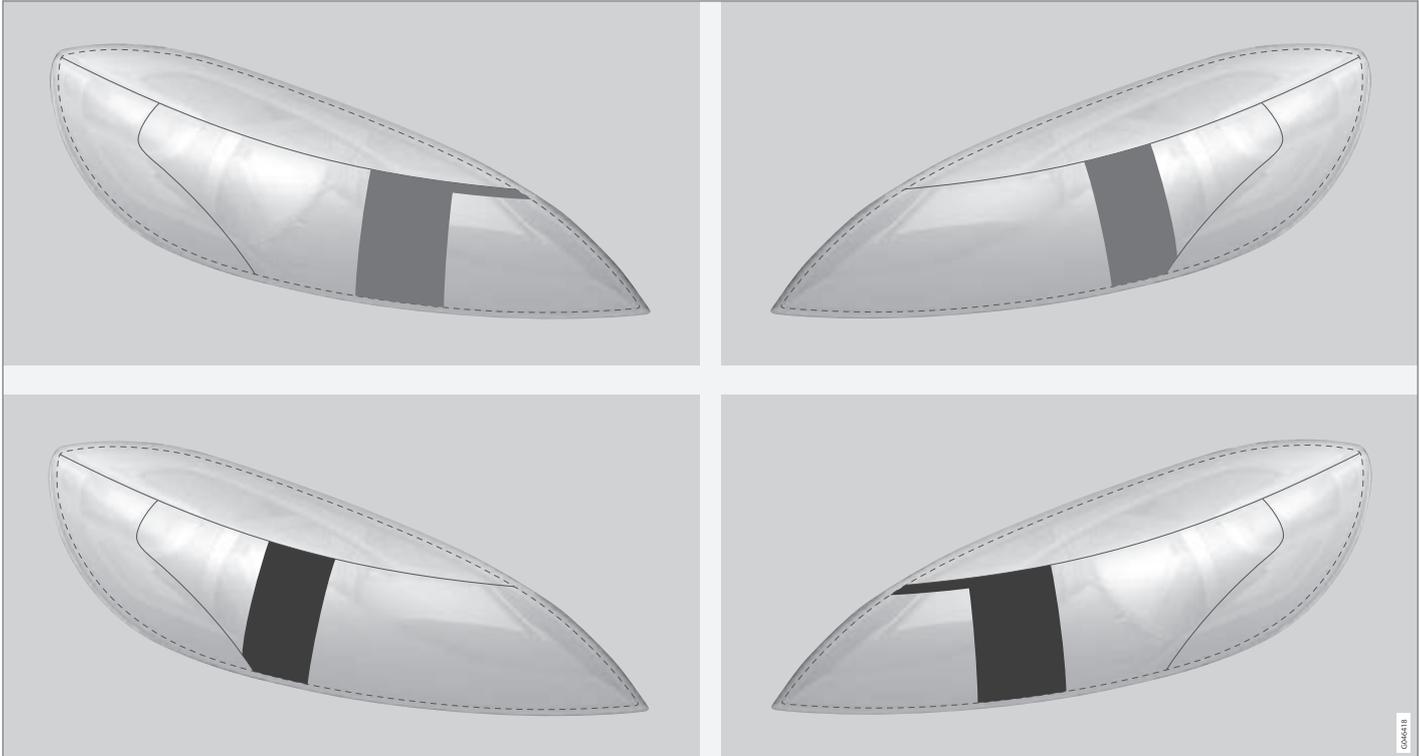


Upper row: left-hand drive cars, templates A and B. Lower row: right-hand drive cars, templates C and D.




## Lighting

Templates for halogen headlamps

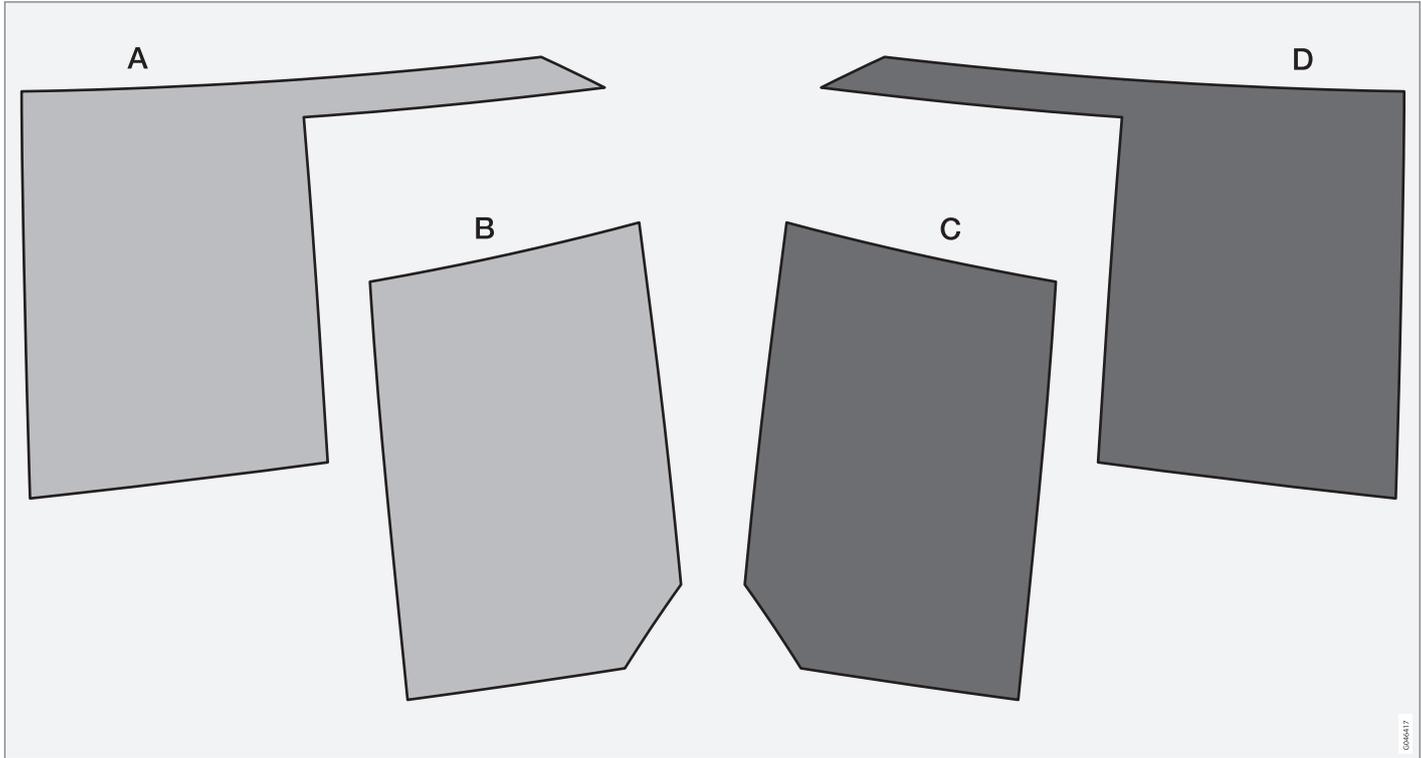

GM4517

03

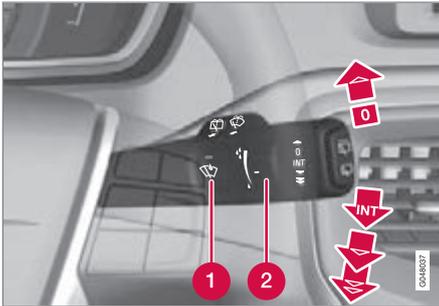**Wipers and washing****Windscreen wipers<sup>1</sup>**

Windscreen wipers and windscreen washers.

- 1** Rain sensor, on/off
- 2** Thumbwheel sensitivity/frequency

**Windscreen wipers off**

- 0** Move the stalk switch to position **0** to switch off the windscreen wipers.

**Single sweep**

-  Raise the stalk switch and release to make one sweep.

**Intermittent wiping**

- INT** Set the number of sweeps per time unit with the thumbwheel when intermittent wiping is selected.

**Continuous wiping**

-  The wipers sweep at normal speed.
-  The wipers sweep at high speed.

**! IMPORTANT**

Before activating the wipers during winter ensure that the wiper blades are not frozen in, and that any snow or ice on the windscreen is scraped away.

**! IMPORTANT**

Use plenty of washer fluid when the wipers are cleaning the windscreen. The windscreen must be wet when the windscreen wipers are operating.

**Service position wiper blade**

For cleaning the windscreen/wiper blades and replacement of wiper blades see see page 352 and 368.

**Rain sensor\***

The rain sensor automatically starts the windscreen wipers based on how much water it detects on the windscreen. The sensitivity of

the rain sensor can be adjusted using the thumbwheel.

When the rain sensor is activated a lamp in the button is illuminated and the rain sensor symbol  is shown in the combined instrument panel.

**Activating and setting the sensitivity**

When activating the rain sensor, the car must be running or the remote control key in position **I** or **II** while the windscreen wiper stalk switch must be in position **0** or in the position for a single sweep.

Activate the rain sensor by pressing the button . The windscreen wipers make one sweep.

Press the stalk switch up for the wipers to make an extra sweep.

Turn the thumbwheel upward for higher sensitivity and downward for lower sensitivity. (An extra sweep is made when the thumbwheel is turned upward.)

**Deactivate**

Deactivate the rain sensor by pressing the button  or move the stalk switch down to another wiper program.

<sup>1</sup> Replacing the wiper blades see page 352, service position, wiper blade see page 352 and filling washer fluid see page 353.


## Wipers and washing

The rain sensor is automatically deactivated when the remote control key is removed from the ignition switch or five minutes after the engine has been switched off.

### ! IMPORTANT

The windscreen wipers could start and be damaged in an automatic car wash. Switch off the rain sensor while the car is in motion or when the remote control key is in position **I** or **II**. The symbol in the combined instrument panel and the light in the button go out.

## Washing the headlamps and windows

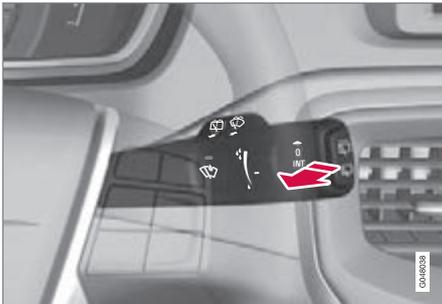

Washing function.

## Washing the windscreen

Move the stalk switch toward the steering wheel to start the windscreen and headlamp washers.

The windscreen wipers will make several more sweeps and the headlamps are washed once the stalk switch has been released.


## High-pressure headlamp washing\*

High-pressure headlamp washing consumes a large quantity of washer fluid. To save fluid, the headlamps are washed automatically at every fifth windscreen wash cycle.

## Reduced washing

If only approx. 1 litre of washer fluid remains in the reservoir and the message that you should fill the washer fluid is shown in the combined instrument panel, then the supply of washer fluid to the headlamps is switched off. This is in order to prioritise cleaning the windscreen and the visibility through it.

## Wiping and washing the rear window

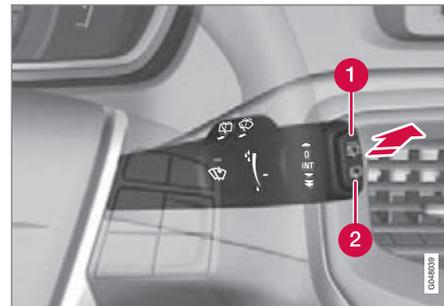

- 1 Rear window wiper – intermittent wiping
- 2 Rear window wiper – continuous speed

Press the stalk switch forward (see the arrow in the illustration above) to initiate rear window washing and wiping.

### i NOTE

The rear window wiper is equipped with overheating protection which means that the motor is switched off if it overheats. The rear window wiper works again after a cooling period (30 seconds or longer, depending on the heat in the motor and the outside temperature).



## Wipers and washing

### Wiper – reversing

Engaging reverse gear while the windscreen wipers are on initiates intermittent rear window wiping<sup>2</sup>. The function stops when reverse gear is disengaged.

If the rear window wiper is already on at continuous speed, no change is made.



#### NOTE

On cars with rain sensors, the rear wiper is activated during reversing if the sensor is activated and it is raining.

<sup>2</sup> This function (intermittent wiping when reversing) can be deactivated. Visit a workshop. Volvo recommends that you contact an authorised Volvo workshop.

## Windows, rearview and door mirrors

### General

#### Laminated glass



The glass is reinforced which provides better protection against break-ins and improved sound insulation in the passenger compartment. The windscreen has laminated glass.

#### Water and dirt-repellent coating\*




The windows are treated with a surface coating that improves the view in difficult weather conditions. Maintenance, see page 369.

### **!** IMPORTANT

Do not use a metal ice scraper to remove ice from the windows. Use the heating to remove ice from the door mirrors, see page 107.

#### Heat-reflecting windscreen\*

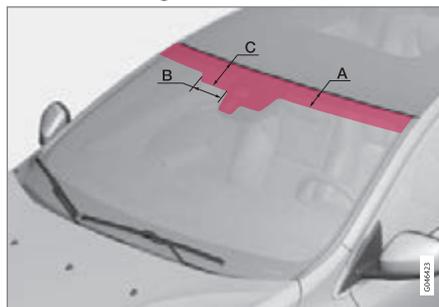

Areas where IR film is not applied.

	Dimensions
A	65 mm
B	150 mm
C	125 mm

The windscreen is equipped with a heat-reflecting film (IR) that reduces the solar heat radiation into the passenger compartment.

The positioning of electronic equipment, such as a transponder, behind a glass surface with heat-reflecting film may affect its function and performance.

For the optimal function of electronic equipment, it should be positioned on the part of the windscreen with no heat-reflecting film (see the highlighted area in the above illustration).

#### Power windows



Driver's door control panel.

- 1 Switch for electric child safety locks\* and disengaging rear power window buttons, see page 62.
- 2 Rear window controls
- 3 Front window controls



## Windows, rearview and door mirrors

### **WARNING**

Check that no rear seat passengers are trapped when the windows are closed from the driver's door.

### **WARNING**

Check that children or other passengers are not trapped if the windows are closed, even when the remote control key is used.

### **WARNING**

If there are children in the car - remember to always switch off the power supply to the power windows by selecting key position **0** and then take the remote control key with you when leaving the car. For information on key positions - see page 82.

### Operating



*Operating the power windows.*

- 1** Operating without auto
- 2** Operating with auto

All power windows can be operated using the control panel for the driver's door - the control panels for the other doors can only each operate their respective power window. Only one control panel can be operated at a time.

In order for the power windows to be used the key position must be at least **I** - see page 81. The power windows can be operated for a few minutes after the engine has been switched off and after the remote control key has been removed - although not after a door has been opened.

Closing of the windows is stopped and the window is opened if anything prevents its movement. It is possible to override the pinch protection when closing has been interrupted, e.g. if there is ice forming. After two successive closing interruptions the pinch protection will be forced and the automatic function deactivated for a short while, now it is possible to close by continually holding the button pulled up.

### **NOTE**

One way to reduce the pulsating wind noise when the rear windows are open is to also open the front windows slightly.

### Operating without auto

Move one of the controls up/down gently. The power windows move up/down as long as the control is held in position.

### Operating with auto

Move one of the controls up/down to the end position and release it. The window runs automatically to its end position.

### Operating with the remote control key and central locking

To remotely operate the power windows from the outside with the remote control key or from inside with central locking, see pages 46 and 57.



## Windows, rearview and door mirrors

### Resetting

If the battery is disconnected then the function for automatic opening must be reset so that it can work correctly.

1. Gently raise the front section of the button to raise the window to its end position and hold it there for one second.
2. Release the button briefly.
3. Raise the front section of the button again for one second.

### WARNING

A reset must take place for pinch protection to work.

### Door mirrors



Door mirror controls.

### Adjusting

1. Press the **L** button for the left-hand door mirror or the **R** button for the right-hand door mirror. The light in the button illuminates.
2. Adjust the position with the joystick in the centre.
3. Press the **L** or **R** button again. The light should no longer be illuminated.

### WARNING

The mirror on the driver's side is the wide-angle type to provide optimal vision. Objects may appear further away than they actually are.

### Storing the position<sup>1</sup>

The mirror positions are stored in the key memory when the car has been locked with the remote control key. When the car is unlocked with the same remote control key the mirrors and the driver's seat adopt the stored positions when the driver's door is opened.

The function can be activated/deactivated in the menu system **MY CAR** under **Settings** → **Car settings** → **Car key memory** → **Personal settings in key memory**. For a description of the menu system, see page 208.

### Angling the door mirror when parking<sup>1</sup>

The door mirror can be angled down for the driver to view the side of the road when parking for example.

- Engage reverse gear and press the **L** or **R** button.

<sup>1</sup> Only in combination with power seat with memory, see page 84.



## Windows, rearview and door mirrors

When reverse gear is disengaged the mirror automatically returns to its original position after about 10 seconds, or earlier by pressing the button labelled **L** or **R** respectively.

### Automatic angling of the door mirror when parking<sup>1</sup>

When reverse gear is engaged the door mirror is automatically angled down so that the driver can see the side of the road when parking for example. When reverse gear is disengaged the mirror automatically returns to its original position after a short time.

The function can be activated/deactivated in the menu system **MY CAR** under **Settings** → **Car settings** → **Side mirror settings** → **Tilt left mirror** or **Tilt right mirror**. For a description of the menu system, see page 208.

### Automatic retraction when locking<sup>1</sup>

When the car is locked/unlocked with the remote control key the door mirrors are automatically retracted/extended.

The function can be activated/deactivated in the menu system **MY CAR** under **Settings** → **Car settings** → **Side mirror settings** → **Fold mirrors**. For a description of the menu system, see page 208.

### Resetting to neutral

Mirrors that have been moved out of position by an external force must be reset electrically to the neutral position for electric retracting/extending to work correctly:

1. Retract the mirrors with the **L** and **R** buttons.
2. Fold them out again with the **L** and **R** buttons.
3. Repeat the above procedure as necessary.

The mirrors are now reset in neutral position.

### Retractable power door mirrors\*

The mirrors can be retracted for parking/driving in narrow spaces:


1. Depress the **L** and **R** buttons simultaneously (key position must be at least **I**).
2. Release them after approximately 1 second. The mirrors automatically stop in the fully retracted position.

Fold out the mirrors by pressing down the **L** and **R** buttons simultaneously. The mirrors automatically stop in the fully extended position.

### Home safe and approach lighting

The light on the door mirrors illuminates when approach lighting or home safe lighting is selected, see page 97.

### Heated windscreen\*, rear window and door mirrors

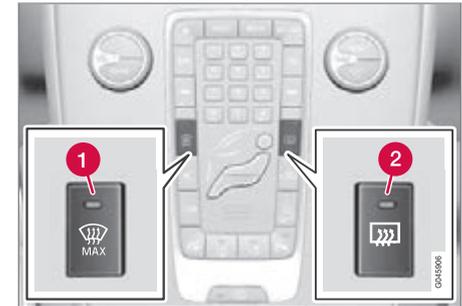

1 Heating, windscreen

2 Heating, rear window and door mirrors

The function is used to remove ice and misting from the windscreen, rear window and door mirrors.

One press of the respective button starts the heating. The light in the button indicates that the function is active. Switch off the heating

<sup>1</sup> Only in combination with power seat with memory, see page 84.



## Windows, rearview and door mirrors

as soon as the ice/misting is cleared in order not to load the battery unnecessarily. However, the function is switched off automatically after a certain time.

Refer to the section "Heated windscreen and max. defroster" on page 222.

The door mirrors and rear window are demisted/defrosted automatically if the car is started in an outside temperature lower than +7 °C. Automatic defrosting can be selected in the menu system **MY CAR** under **Settings** → **Climate settings** → **Auto start rear defrost**. Select between **On** or **Off**. For a description of the menu system, see page 208.

The compass is deactivated when the heated windscreen is activated. When the heated windscreen is deactivated, the compass is reactivated.

### Interior rearview mirror



1 Control for dimming

### Manual dimming

Bright light from behind could be reflected in the rearview mirror and dazzle the driver. Use dimming with the dimming control when lights from behind are distracting:

1. Use dimming by moving the control in towards the passenger compartment.
2. Return to normal position by moving the control towards the windscreen.

### Automatic dimming\*

Bright light from behind is automatically dimmed by the rearview mirror. The control for manual dimming is not available on mirrors with automatic dimming.

The rearview mirror contains two sensors - one forward facing and one rearward facing - that work together to identify and eliminate dazzling light. The forward facing sensor detects ambient light, while the rearward facing sensor detects the light from vehicle headlights behind.

### **i** NOTE

If the sensors are obscured by e.g. parking permits, transponders, sun visors or objects in the seats or in the cargo area in such a way that light is prevented from reaching the sensors, then the rearview mirror's dimming function is reduced.


The compass\* can only be specified for a rearview mirror with automatic dimming, see page 110.

### Glass roof\*

The glass roof is fixed, but the blind can be operated in key position **I** or **II** with the control in the roof console. For information on key positions - see page 81.



## Windows, rearview and door mirrors

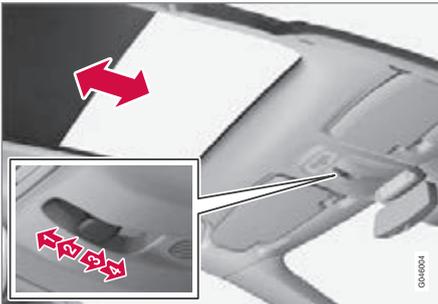

- 1 Automatic opening to end position
- 2 Manual opening until the button is released
- 3 Manual closing until the button is released
- 4 Automatic closing to end position

**! IMPORTANT**


- Avoid touching the blind because it may then be damaged.
- Only use the control in the roof console to operate the blind.



# 03 Your driving environment

## Compass\*

### Operation

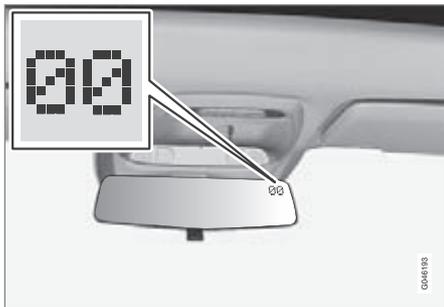

Rearview mirror with compass.

The upper right-hand corner of the rearview mirror has an integrated display that shows the compass direction in which the front of the car is pointing. Eight different directions are shown with English abbreviations: **N** (north), **NE** (north east), **E** (east), **SE** (south east), **S** (south), **SW** (south west), **W** (west) and **NW** (north west).

The compass is activated automatically when the car is started or in key position II, see page 81. To deactivate/activate the compass - press in the button on the rear side of the mirror using a paper clip for example.

The compass is deactivated when the heated windscreen is activated. When the heated

windscreen is deactivated, the compass is reactivated.

### Calibration

The earth is divided into 15 magnetic zones. The compass is set for the geographic area to which the car was delivered. The compass should be calibrated if the car is moved across several magnetic zones. Proceed as follows:


1. Stop the car in a large open area free from steel structures and high-voltage power lines.
2. Start the car.



### NOTE

For the best calibration, switch off all electrical equipment (climate control system, wipers, etc.) and makes sure that all doors are closed.

3. Hold the button on the underside of the rearview mirror depressed approx. 3 seconds. The number of the current magnetic zone is shown.

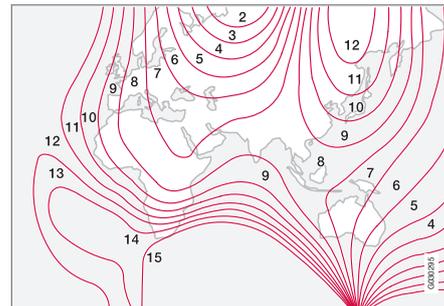

Magnetic zones.

4. Press the button repeatedly until the required magnetic zone (1–15) is shown. See the map of magnetic zones for the compass.
5. Wait until the display returns to showing the character **C**, or hold the button on the bottom of the rearview mirror depressed for approx. 6 seconds (use e.g. a paper clip) until the character **C** is shown.
6. Drive slowly in a circle at a speed of no more than 10 km/h until a compass direction is shown in the display, indicating that calibration is complete. Then drive a further 2 circles to fine-tune calibration.
7. Repeat the above procedure as necessary.



## Alcolock\*


### General information on the alcolock

The function of the Alcolock<sup>1</sup> is to prevent the car from being driven by individuals under the influence of alcohol. Before the engine can be started the driver must take a breath test that verifies that he/she is not under the influence of alcohol. Alcolock calibration takes place in accordance with each market's limit value in force for driving legally.

#### WARNING

The Alcolock is an aid and does not exempt the driver from responsibility. It is always the responsibility of the driver to be sober and to drive the car safely.

### Functions

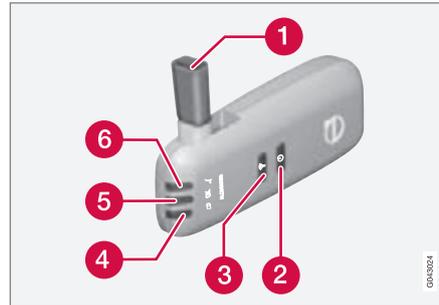

- 1 Nozzle for breath test.
- 2 Switch.
- 3 Transmission button.
- 4 Lamp for battery status.
- 5 Lamp for result of breath test.
- 6 Lamp indicates ready for breath test.

### Operation

#### Battery

Alcolock indicator lamp (4) shows battery status:

Indicator lamp (4)	Battery status
Green flash-ing	Charging in progress
Green	Fully charged
Yellow	Semi-charged
Red	Discharged - fit the charger in the holder or connect the power supply cable from the glovebox.

#### NOTE

Store the Alcolock in its holder. This will keep the built-in battery fully charged and the Alcolock is activated automatically when the car is opened.

<sup>1</sup> Also called Alcoguard.



## Alcolock\*

### Storage



Handheld unit storage and charging station.

- The handheld alcolock unit is released by depressing it slightly in its holder and releasing it - it then springs out and can be removed from the holder.
- Replace the handheld unit in the holder by pushing it in until it engages.
- Store the handheld unit in the holder - this provides it with the best protection and keeps its batteries fully charged.

### Before starting the engine

The Alcolock is activated automatically and is then ready for use when the car is opened.

1. When the indicator lamp (6) is green the Alcolock is ready for use.
2. Withdraw the Alcolock from its holder. If the Alcolock is outside the car when it is

unlocked then it must first be activated with the switch (2).

3. Fold up the nozzle (1), take a deep breath and blow with an even pressure until a "click" is heard after approx. 5 seconds. The result will be one of the alternatives in the following table **Result after breath test**.
4. If no message is shown then the transmission to the car may have failed - in which case, press the button (3) to transmit the result to the car manually.
5. Fold down the nozzle and refit the Alcolock in its holder.
6. Start the engine following an approved breath test within 5 minutes - otherwise it must be repeated.

### Result after breath test

Indicator lamp (5) + Display text	Specification
Green lamp + Alcolguard Approved test	Start the engine - no alcohol content measured.
Yellow lamp + Alcolguard Approved test	Engine starting possible - measured alcohol content is above 0.1 promille but below the limit value in force <sup>A</sup> .
Red lamp + Dis-approved test Wait 1 minute	Engine starting not possible - measured alcohol content is above the limit value in force <sup>A</sup> .

<sup>A</sup> Limits vary between countries, so find out what limits apply. See also the section entitled General information on the Alcolock on page 111



### NOTE

After a completed period of driving, the engine can be restarted within 30 minutes without a new breath test.



## To bear in mind

### Before the breath test

In order to obtain correct function and as accurate a measurement result as possible:

- Avoid eating or drinking approx. 5 minutes before the breath test.
- Avoid excess windscreen washing - the alcohol in the washer fluid may result in an incorrect measurement result.

### Change of driver

In order to ensure that a new breath test is carried out in the event of a change of driver - depress the switch (2) and the send button (3) simultaneously for approx. 3 seconds. At which point the car returns to start inhibition mode and a new approved breath test is required before starting the engine.

### Calibration and service

The Alcolock must be checked and calibrated at a workshop<sup>2</sup> every 12 months.

30 days before recalibration is necessary the combined instrument panel shows the message **Alcoguard Calibr. required**. If calibration is not carried out within these 30 days then normal engine starting will be blocked - only starting with the Bypass function will

then be possible, see page 113 section Emergency situation.

The message can be cleared by pressing the send button (3) once. Otherwise it goes out on its own after approx. 2 minutes but then reappears each time the engine is started - only recalibration at a workshop<sup>2</sup> can clear the message permanently.

### Cold or hot weather

The colder the weather the longer it takes before the Alcolock is ready for use:

Temperature (°C)	Maximum heating time (seconds)
+10 to +85	10
-5 to +10	60
-40 to -5	180

At temperatures below -20 °C or above +60 °C the Alcolock requires additional power supply. The combined instrument panel shows **Alcoguard insert power cable**. In which case, connect the power supply cable from the glovebox and wait until indicator lamp (6) is green.

In extremely cold weather the heating time can be reduced by taking the Alcolock indoors.

### Emergency situation

In the event of an emergency situation or the Alcolock is out of order, it is possible to bypass the Alcolock in order to drive the car.

#### NOTE

All Bypass activation is logged and saved in memory, see page 8 in the section, Recording data.

After the bypass function has been activated the combined instrument panel shows **Alcoguard Bypass enabled** the whole time while driving and can only be reset by a workshop<sup>2</sup>.

The Bypass function can be tested without the error message being logged - in which case, carry out all the steps without starting the car. The error message is cleared when the car is locked.

When the Alcolock is installed, either the Bypass or Emergency function is selected as the bypassing option. This setting can be changed afterwards at a workshop<sup>2</sup>.

<sup>2</sup> An authorised Volvo workshop is recommended.



## 03 Your driving environment

### Alcolock\*

#### Activating the Bypass function

- Depress and hold the left-hand stalk switch **OK** button and the button for hazard warning flashers simultaneously for approx. 5 seconds - the combined instrument panel first shows **Bypass activated Wait 1 minute** and then **Alcoguard Bypass enabled** - after which the engine can be started.

This function can be activated several times. The error message shown during driving can only be cleared at a workshop<sup>2</sup>.

#### Activating the Emergency function

- Depress and hold the left-hand stalk switch **OK** button and the button for hazard warning flashers simultaneously for approx. 5 seconds - the combined instrument panel shows **Alcoguard Bypass enabled** and the engine can be started.

This function can be used once, after which a reset must be made at a workshop<sup>2</sup>.

#### Symbols and text messages

In addition to the messages already described, the following may also be shown:

Display text	Meaning/Action
Alcoguard Restart possible	The engine has been switched off for less than 30 minutes - engine starting possible without new test.
Alcoguard Service required	Contact a workshop <sup>2</sup> .
Alcoguard No signal	Transmission failed - send manually with button (3) or take a new breath test.
Alcoguard Invalid test	Test failed - take a new breath test.
Alcoguard Blow longer	Blowing too short - blow for longer.
Alcoguard Blow softer	Blowing too hard - blow more gently.

Display text	Meaning/Action
Alcoguard Blow harder	Blowing too weak - blow harder.
Alcoguard wait Preheating	Heating not finished - wait for text Alcoguard Blow 5 seconds.

<sup>2</sup> An authorised Volvo workshop is recommended.

\* Option/accessory, for more information, see Introduction.



## Starting the engine

### Petrol and diesel engines



Ignition switch with remote control key extracted/inserted, and **START/STOP ENGINE** button.

#### **!** IMPORTANT

Do not press in the remote control key incorrectly turned - Hold the end with the detachable key blade, see page 49.

1. Insert the remote control key in the ignition switch and press it in to its end position. Note that if the car is equipped with an alcolock then a breath test must first be approved before the engine can be started - see page 111.

2. Hold the clutch pedal fully depressed<sup>1</sup>. (For cars with automatic gearbox - Depress the brake pedal.)
3. Press the **START/STOP ENGINE** button and then release it.

The starter motor works until the engine is started or until its overheating protection triggers.

#### **!** IMPORTANT

If the engine fails to start after 3 attempts - wait for 3 minutes before making a further attempt. Starting capacity increases if the battery is allowed to recover.

#### **!** WARNING

Always remove the remote control key from the ignition switch when leaving the car, and make sure that the key position is **0** - in particular if there are children in the car. For information on how this works - see page 81.

#### **i** NOTE

The idling speed can be noticeably higher than normal for certain engine types during cold starting. This is done in order that the emissions system can reach normal operating temperature as quickly as possible, which minimises exhaust emissions and protects the environment.

#### **Keyless drive\***

Follow steps 2–3 for starting petrol and diesel engines. For more information on Keyless drive - see page 52.

#### **i** NOTE

A prerequisite for the engine to start is that one of the car's remote control keys with the Keyless drive function is in the passenger compartment or cargo area.

#### **!** WARNING

**Never** remove the remote control key from the car while driving or during towing.

#### **Stop the engine**

To switch off the engine:

<sup>1</sup> If the car is moving then it is enough to press the **START/STOP ENGINE** button to start the car.



### Starting the engine

- Press **START/STOP ENGINE** - the engine stops.
- If the car has an automatic gearbox and the gear selector is not in a position **P** or if the car is moving - Press twice or hold the **START/STOP ENGINE** button depressed until the engine stops.

### Steering lock

A mechanical noise can be perceived when the steering lock unlocks or locks.

- The steering lock unlocks when the remote control key is in the ignition switch<sup>2</sup> and the **START/STOP ENGINE** button is depressed.
- The steering lock locks when the driver's door is opened after the engine has been switched off.

### Key positions


For information on the remote control key's different key positions - see page 81

<sup>2</sup> Cars with Keyless drive must have a remote control key inside the passenger compartment.



## Starting the engine – external battery

### Jump starting

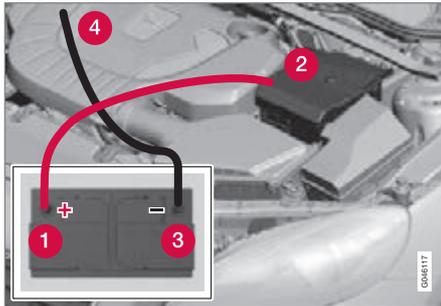

If the battery is flat then the car can be started with current from another battery.

When jump starting the car, the following steps are recommended to avoid short circuits or other damage:

1. Insert the remote control key in key position **0**, see page 81.
2. Check that the donor battery has a voltage of 12 V.
3. If the donor battery is installed in another car - switch off the donor car's engine and make sure that the two cars do not touch each other.
4. Connect one of the red jump lead's clamps to the donor battery's positive terminal (1).

### IMPORTANT

Connect the start cable carefully to avoid short circuits with other components in the engine compartment.

5. Open the clips on the front cover of the battery in your car and remove the cover.
6. Connect the red jump lead's other clamp onto the car's positive terminal (2).
7. Connect one of the black jump lead's clamps to the donor battery's negative terminal (3).
8. Connect the other clamp to a grounding point, e.g. right-hand engine mounting at the top, the outer screw head (4).
9. Check that the jump lead clamps are affixed securely so that there are no sparks during the starting procedure.
10. Start the engine of the "donor car" and allow it to run a few minutes at a speed slightly higher than idle approx. 1500 rpm.

11. Start the engine in the car with the discharged battery.

### IMPORTANT

Do not use the connections when attempting to start, as there is a risk of sparking.

12. Remove the jump leads in reverse order - first the black and then the red.
  - > Make sure that none of the black jump lead's clamps comes into contact with the battery's positive terminal or the clamp connected to the red jump lead!

### WARNING

- The battery can generate oxyhydrogen gas, which is highly explosive. A spark can be formed if a jump lead is connected incorrectly, and this can be enough for the battery to explode.
- The battery contains sulphuric acid, which can cause serious burns.
- If sulphuric acid comes into contact with eyes, skin or clothing, flush with large quantities of water. If acid splashes into the eyes - seek medical attention immediately.

For more information on the car's battery - see page 355.



## Gearboxes

### General

#### IMPORTANT

To prevent damage to any drive system components, the working temperature of the gearbox is checked. If there is a risk of overheating, a warning symbol in the combined instrument lights up and a text message is shown. Follow the recommendation given in the text message.

#### Start assistance on a hill - HSA\*

The foot brake can be released before setting off or reversing uphill - the HSA (Hill Start Assist) function means that the car does not roll backwards.

The function means that the pedal pressure in the brake system remains for several seconds while the driver's foot is moved from brake pedal to accelerator pedal.

The temporary braking effect releases after several seconds or when the driver accelerates.

### Manual gearbox



Gearing pattern.

Look at the actual gearshift pattern imprinted on the gear lever.

- Depress the clutch pedal fully during each gear change.
- Take your foot off the clutch pedal between gear changes.

#### WARNING

Always apply the parking brake when parking on a slope - leaving the car in gear is not sufficient to hold the car in all situations.

### Reverse gear inhibitor

The reverse gear inhibitor hinders the possibility of mistakenly attempting to engage reverse gear during normal forward travel.

- Follow the gearing pattern printed on the gear lever and start from neutral position, **N** then **depress** the gear lever before moving it to **R** position.
- Engage reverse gear only when the car is stationary.

### Gear shift indicator\*

An essential detail in connection with environmental driving is to drive in the right gear and to change gear in plenty of time.

An indicator is available as an aid on some variants - GSI (Gear Shift Indicator) - which notifies the driver when it is appropriate to engage the next higher or lower gear in order to obtain the lowest possible fuel consumption. However, taking into consideration characteristics such as performance and vibration-free running, it may be advantageous to change gear at a higher engine speed. The framed number indicates the current gear.



## Gearboxes

### Manual gearbox



Gear shift indicator for manual gearbox. Only one marker is illuminated at a time - it is illuminated in the centre only during normal driving.

When gearing up/down as recommended, the upper one is illuminated at "+" or the lower at "-", marked red in the illustration.

### Automatic gearbox



Combined instrument panel "Digital" with gear shift indicator.



With "Analogue" combined instrument panel, the gear positions and indicator arrows are displayed in its centre.


### Automatic gearbox Geartronic\*



**D:** Automatic gear positions. **+/-:** Manual gear positions. **S:** Sport mode\*.<sup>1</sup>

The combined instrument panel shows the position of the gear selector using the following indications: **P**, **R**, **N**, **D**, **S\***, **1**, **2**, **3** etc.

### Gear positions



Automatic gear positions are indicated on the right of the combined instrument panel. (Only one marker is illuminated at a time - the one showing the current gear selector position.)

Symbol "**S**" for Sport mode is ORANGE when the mode is active.

#### **P** – Parking position

Select **P** when starting the engine or when the car is parked.

- In order to be able to move the gear selector from **P** position, the brake pedal must first be depressed firmly.

The gearbox is mechanically blocked when the **P** position is engaged. Apply the parking brake as well, as a precaution - see page 133.

#### **i** NOTE

The gear selector must be in **P** position to allow the car to be locked and alarmed.

<sup>1</sup> The gear lever's gearshift pattern varies depending on engine option.



## 03 Your driving environment

### Gearboxes

#### **IMPORTANT**

The car must be stationary when position **P** is selected.

#### **WARNING**

Always apply the parking brake when parking on a slope - the automatic transmission in **P** is not sufficient to hold the car in all situations.

#### **R – Reverse**

The car must be stationary when position **R** is selected.

#### **N – Neutral**

No gear is engaged and the engine can be started. Apply the parking brake if the car is stationary with the gear selector in position **N**.

#### **D – Drive**

**D** is the normal driving position. Shifting up and down takes place automatically based on the level of acceleration and speed. The car must be stationary when the gear selector is moved to position **D** from position **R**.

#### **Geartronic – Manual gear positions (+/-)**

The driver can also change gear manually using the Geartronic automatic gearbox. The car engine-brakes when the accelerator pedal is released.

The manual gear position is reached by moving the lever to the side from position **D** to the end position at "+/-". The combined instrument panel's symbol "+/-" changes colour from WHITE to ORANGE and the digits **1, 2, 3** etc. are displayed in a box which corresponds to the gear that has just been selected.

- Move the lever forwards towards "+" (plus) to change up a gear and release the lever, which returns to its neutral position between "+" and "-".

or

- Pull the lever back towards "-" (minus) to change down a gear and release it.

The manual gearshift mode "+/-" can be selected at any time while driving.

Geartronic automatically shifts down if the driver allows the speed to decrease lower than a level suitable for the selected gear, in order to avoid jerking and stalling.

To return to automatic driving mode:

- Move the lever to the side to the end position at **D**.

#### **NOTE**

If the gearbox has a Sport programme then the gearbox will only become manual after the lever has been moved forwards or backwards in its "+/-" position. The combined instrument panel then shifts the indication from **S** to show which of the gears **1, 2, 3** etc. is engaged.

#### **Geartronic - Sport mode (S)**



The Sport programme provides sportier characteristics and allows higher engine speed for the gears.

At the same time it responds more quickly to acceleration. During active driving, the use of a lower gear is prioritised, leading to a delayed upshift.

To activate Sport mode:

- Move the gear selector to the side from **D** position to the end position at "+**S**-" - the combined instrument panel changes indication from **D** to **S**.

Sport mode can be selected at any time while driving.

#### **Geartronic - Winter mode**

It can be easier to pull away on slippery roads if 3rd gear is engaged manually.

1. Depress the brake pedal and move the gear selector from **D** position to the end



## Gearboxes

position at "+/-" - the combined instrument panel shifts the indication from **D** to the figure 1<sup>2</sup>.

2. Scroll up to gear 3 by pushing the lever forward towards "+" (plus) twice - the combined instrument panel shifts the indication from 1 to 3.
3. Release the brake and accelerate carefully.

The gearbox "winter mode" means that the car moves off with a lower engine speed and reduced engine power on the drive wheels.

### Kick-down

When the accelerator pedal is pressed all the way to the floor (beyond the position normally regarded as full acceleration) a lower gear is immediately engaged. This is known as kick-down.

If the accelerator is released from the kick-down position, the gearbox automatically changes up.

Kick-down is used when maximum acceleration is needed, such as for overtaking.

### Safety function


To prevent overrevving the engine, the gearbox control program has a protective down-

shift inhibitor which prevents the kick-down function.

Geartronic does not permit downshifting/kick-down which would result in an engine speed high enough to damage the engine. Nothing happens if the driver still tries to shift down in this way at high engine speed – the original gear remains engaged.

When kick-down is activated the car can change one or more gears at a time depending on engine speed. The car changes up when the engine reaches its maximum speed in order to prevent damage to the engine.

### Mechanical gear selector inhibitor

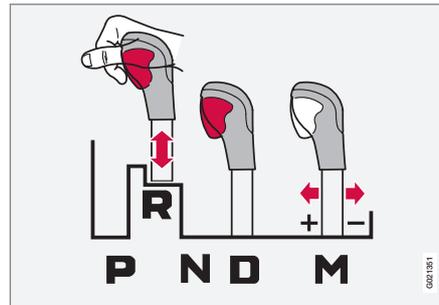

The gear selector can be moved forward and back freely between **N** and **D**. Other positions are locked with a latch that is released with the inhibitor button on the gear selector.

With the inhibitor button depressed the lever can be moved forwards or backwards between **P**, **R**, **N** and **D**.

### Automatic gear selector inhibitor

The automatic gearbox has special safety systems:

#### Parking position (P)

Stationary car with engine running:

- Keep your foot on the brake pedal when moving the gear selector to another position.

#### Electric gear inhibitor – Shiftlock

##### Parking position (P)

To be able to move the gear selector from **P** to other gear positions, the brake pedal must be depressed and the remote control key must be in position **II**, see page 81.

##### Shiftlock – Neutral (N)


If the gear selector is in the **N** position and the car has been stationary for at least 3 seconds (irrespective of whether the engine is running) then the gear selector is locked.

<sup>2</sup> If the car has Sport mode\* then "S" is shown first.

## Gearboxes

To be able to move the gear selector from **N** to other gear positions, the brake pedal must be depressed and the remote control key must be in position **II**, see page 81.

### Deactivate automatic gear selector inhibitor

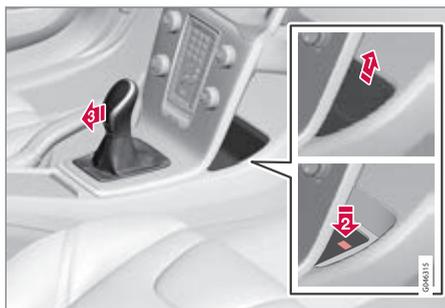

If the car cannot be driven, e.g. due to a flat battery, the gear selector must be moved from the **P** position so that the car can be moved.

- ➊ Lift out the contoured insert in the compartment behind the centre console and locate a spring-loaded button in the bottom of the compartment.
- ➋ Press and hold the button.

- ➌ Move the gear selector from the **P** position and release the button.
4. Refit the storage compartment insert.

### Automatic gearbox Powershift\*



**D:** Automatic gear positions. **+/-:** Manual gear positions. **S:** Sport mode\*.<sup>3</sup>

The Powershift automatic gearbox transmits the motive force from the engine to the drive wheels with double mechanical clutch discs, as opposed to Geartronic which instead uses a conventional hydraulic torque converter.

Powershift transmission operates in the same way<sup>4</sup> and has similar controls and functions

as the Geartronic automatic gearbox described in the previous section.

### Powershift or Geartronic?

In the event of uncertainty as to whether or not the car is equipped with Powershift transmission, this can be verified by checking the designation on the gearbox label under the bonnet - see page 376. The designation "MPS6" means that it is Powershift transmission - otherwise it is Geartronic automatic transmission.

### To bear in mind

The transmission's double clutch has overload protection that is activated if it becomes too hot, e.g. if the car is held stationary with the accelerator pedal on an uphill gradient for a long time.

Overheated transmission causes the car to shake and vibrate, and the warning symbol illuminates and the combined instrument panel shows a message. The transmission can also overheat during slow driving in queues (10 km/h or slower) on an uphill gradient, or with a trailer hitched. The transmission cools down when the car is stationary, with foot brake depressed and the engine running at idling speed.

<sup>3</sup> The gear lever's gearshift pattern varies depending on engine option.

<sup>4</sup> One exception is the heading "Geartronic - Winter mode": Powershift enables driving away on a slippery road surface if 2nd gear is engaged manually - not 3rd gear.



## Gearboxes

Overheating during slow driving in queues can be avoided by driving in stages:

- Stop the car and wait with your foot on the brake pedal until there is a moderate distance to the traffic ahead, drive forward a short distance, and then wait another moment with your foot on the brake pedal.

**! IMPORTANT**

Use the foot brake to hold the car stationary on an uphill gradient - do not hold the car with the accelerator pedal. The gearbox could then overheat.

For important information regarding Powershift transmission and towing - see page 315.

**Text message and action**

In some situations the combined instrument panel may show a text message at the same time as a symbol is illuminated.

Symbol	Message	Driving characteristics	Action
	<b>Transm. overheat brake to hold</b>	Difficulty in maintaining even speed at constant engine speed.	Transmission overheated. Keep the car stationary using the foot brake. <sup>A</sup>
	<b>Transm. overheat park safely</b>	Significant pulling in the car's traction.	Transmission overheated. Park the car immediately in a safe manner. <sup>A</sup>
	<b>Transm. cooling let engine run</b>	No drive due to overheated gearbox.	Transmission overheated. For fastest cooling: Run the engine at idling speed with the gear lever in the <b>N</b> or <b>P</b> position until the message clears.

<sup>A</sup> For fastest cooling: run the engine at idling speed with the gear lever in the **N** or **P** position, until the message clears.

The table shows three steps with an increased degree of seriousness should the transmission become too hot. In parallel with the text message, the driver is also advised that the car's electronics are temporarily changing the driving characteristics. Follow the instructions in the text message where appropriate.

**i NOTE**

The examples in the table are no indication of the car being defective, but show that a safety function has been activated with a view to preventing damage to any of the car's components.

**! WARNING**

If a warning symbol combined with the text **Transm. overheat park safely** is ignored then the heat in the gearbox may become so high that the power transmission between engine and gearbox is temporarily halted in order to prevent the clutch



### Gearboxes

from malfunctioning - the car then loses drive and is stationary until gearbox temperature has cooled to an acceptable level.

For more possible text messages with their respective proposals for solutions concerning automatic transmission, see page 205.

A text message extinguishes automatically after the action has been carried out or after one press on the indicator stalk **OK** button.



## Start/Stop\*

### Quieter and cleaner

Environmental care is one of Volvo Car Corporation's core values and it influences all of our operations. This target orientation has resulted in several separate energy-saving functions of which Start/Stop is one, all with the collective task of reducing fuel consumption, which in turn helps to reduce exhaust emissions.

### General information on Start/Stop



The engine is switched off - it becomes quieter and cleaner...

Some engine and gearbox combinations come fitted with a Start and Stop function which engages in the event of e.g. stationary traffic or waiting at traffic lights - the engine is then switched off temporarily and restarts

automatically when the journey is due to continue.

The Start/Stop function gives the driver the opportunity for a more active environmentally conscious way of driving the car by means of being able to allow the engine to stop automatically, whenever appropriate.

### Manual or Automatic

Note that there are differences in the Start/Stop function depending on whether the gearbox is manual or automatic.

### Function and operation



The Start/Stop function is activated automatically when the engine is started with the key. The driver is alerted to the function by means of the symbol for the On/Off button illuminating in the combined instrument panel and the lamp in the On/Off button illuminating.

All of the car's normal systems such as lighting, radio, etc. work as normal even with an engine that has stopped automatically, except that some equipment may have the function temporarily reduced, e.g. the climate

control system's fan speed or extremely high volume on the audio system.

### Auto-stopping the engine

The following is required for the engine to auto-stop:

Conditions	M/A A
Declutch, set the gear lever in neutral position and release the clutch pedal - the engine stops automatically.	M
Stop the car with the foot brake and then keep your foot on the pedal - the engine stops automatically.	A

A M = Manual gearbox, A = Automatic gearbox.

In some cases the engine stops automatically before the car is completely stationary.



The combined instrument panel's symbols for the Start/Stop function illuminate as verification and reminder that the engine has stopped automatically.



\* Option/accessory, for more information, see Introduction.



# 03 Your driving environment

## Start/Stop\*

### Auto-starting the engine

Conditions	M/ A <sup>A</sup>
With the gear lever in neutral position: 1. Depress the clutch pedal or press the accelerator pedal - the engine starts. 2. Engage a suitable gear and drive.	M
The following option is also available on a downhill gradient: Release the foot brake and let the car move off - the engine starts automatically when the speed exceeds normal walking pace.	M
Release the foot pressure on the foot brake - the engine starts automatically and the journey can continue.	A

A M = Manual gearbox, A = Automatic gearbox.

### Start assistance HSA

The foot brake can also be released on an uphill gradient to start the engine automatically - the (Hill Start Assist) function means that the car does not roll backwards.

HSA means that the pressure in the brake system remains temporarily available while the driver's foot is moved from the brake pedal to the accelerator pedal for driving off with the engine having stopped automatically. The temporary braking effect releases after a couple of seconds or when the driver accelerates.

There is more information available on HSA on page 118.

### Deactivating the Start/Stop function



In certain situations, it may be advisable to temporarily switch off the automatic Start/Stop function - this is carried out with a push of this button.



Disengaged function is indicated by the combined instrument panel's Start/Stop symbols and the button's lamp extinguishing.



The Start/Stop function is disengaged until it is reactivated with the button or until the next time the engine is started with the key.

### Limitations

#### The engine does not auto-stop

Even if the Start/Stop function is activated, the engine does not stop automatically if:

Conditions	M/ A <sup>A</sup>
the car has not achieved approx. 5 km/h (= fast walking pace) first after a key start or the last auto-stop.	M + A
the driver has opened the seatbelt's buckle.	M + A
the capacity of the battery is below the minimum permissible level.	M + A
the engine does not have normal operating temperature.	M + A
outside temperature is below freezing point or above approx. 30 °C.	M + A
the windscreen's electric heating is activated.	M + A
the environment in the passenger compartment differs from the preset values <sup>B</sup> - indicated by the ventilation fan running at a high speed.	M + A



## Start/Stop\*

Conditions	M/ A <sup>A</sup>
the car is reversed.	M + A
the starter battery's temperature is below freezing point or too high.	M + A
the driver makes greater steering wheel movements.	M + A
the exhaust system's particulate filter is full - the temporarily disengaged Start/Stop function is reactivated once an automatic cleaning cycle has been performed (see page 303).	M + A
the road is very steep.	M + A
a trailer is connected electrically to the car's electrical system.	M + A
the atmospheric air pressure is less than equivalent to 1500-2400 metres above sea level - the current air pressure varies with the prevailing weather conditions.	M + A
adaptive cruise control Queue Assist is activated.	A

Conditions	M/ A <sup>A</sup>
the driver's door has been opened with the gear selector in <b>D</b> position.	A
the gear selector is moved out of the <b>D</b> position to <b>S</b> position <sup>C</sup> or "+/-".	A

<sup>A</sup> M = Manual gearbox, A = Automatic gearbox.

<sup>B</sup> Car with ECC.

<sup>C</sup> Sport mode.

### The engine auto-starts

An engine that has stopped automatically may restart in some cases without the driver having decided that the journey should continue. In the following cases the engine also starts automatically if the driver has not depressed the clutch pedal (manual gearbox) or takes his/her foot off the brake pedal (automatic gearbox):

Conditions	M/A <sup>A</sup>
Misting forms on the windows.	M + A
The environment in the passenger compartment deviates from the preset values <sup>B</sup> .	M + A

Conditions	M/A <sup>A</sup>
The outside temperature falls below freezing point or exceeds approx. 30 °C.	M + A
There is a temporarily high current take-off or battery capacity drops below the lowest permissible level.	M + A
Repeated pumping of the brake pedal.	M + A
The car starts to roll - faster than the equivalent normal walking pace.	M
The driver's belt lock is opened with the gear selector in <b>D</b> or <b>N</b> position.	A
Steering wheel movements.	A
The gear selector is moved from the <b>D</b> position to "+/-" or <b>R</b> .	A
The driver's door is opened with the gear selector in <b>D</b> position.	A

<sup>A</sup> M = Manual gearbox, A = Automatic gearbox.





## Start/Stop\*

### **WARNING**

Do not open the bonnet when the engine has stopped automatically - the engine may suddenly start automatically. First switch off the engine as normal using the **START/STOP ENGINE** button before opening the bonnet.

### The engine does not auto-start

In the following cases the engine does not auto-start after having auto-stopped:

Conditions	M/ A <sup>A</sup>
A gear is engaged without declutching - a display text prompts the driver to set the gear lever in neutral position in order to enable automatic starting.	M
The driver is unrestrained, the gear selector is in <b>P</b> position and the driver's door is open - a normal engine start must take place.	A

A M = Manual gearbox, A = Automatic gearbox.

### Involuntary engine stop with manual gearbox

In the event that a start-up fails and the engine stops, proceed as follows:

1. Depress the clutch pedal again - the engine starts automatically.
2. In certain cases the gear lever must be set in neutral position. The combined instrument panel then shows the text **Put gear in neutral**

### More information and settings



The car's **MY CAR** menu system, under the heading **DRIVE**, contains an introduction of Volvo's Start-Stop system, as well as recommendations for energy-saving driving techniques - see page 208.

### Symbols and messages



In combination with this indicator lamp the Start/Stop function may display text messages in the combined instrument panel for certain situations. For some of them there is a recommended action that should be performed. The following table shows some examples.



## Start/Stop\*

Symbol	Message	Info/Action	M/A <sup>A</sup>
	Engine in Auto Start	Illuminates for a few seconds after Start/Stop has been activated.	M + A
	Eco DRIVe OFF	Illuminates for a few seconds after Start/Stop has been switched off.	M + A
	Auto Start/Stop Service required	Start/Stop is not operational. Contact a workshop - an authorised Volvo workshop is recommended.	M + A
	Engine management system	An automatic function check is carried out.	M + A
	Autostart Engine running + acoustic signal	Activated if the driver's door is opened with auto-stopped engine.	M + A
	Engine in Auto Start	The engine is ready to start automatically - waiting for the brake or clutch pedal to be depressed.	M
	Press Start button	The engine will not start automatically - start the engine as normal with the <b>START/STOP ENGINE</b> button.	M
	Depress clutch pedal to start	The engine is ready to auto-start - waiting for the clutch pedal to be depressed.	M
	Depress brake pedal to start	The engine is ready to auto-start - waiting for the brake pedal to be depressed.	M
	Press brake and clutch to start	The engine is ready to auto-start - waiting for the brake or clutch pedal to be depressed.	M

03





## 03 Your driving environment

### Start/Stop\*

Symbol	Message	Info/Action	M/A <sup>A</sup>
	Put gear in neutral to start	Gear is engaged without declutching - disengage and set the gear lever in neutral position.	M
	Engine in Auto Start	The engine is ready to start automatically - waiting for the brake pedal to be released.	A
	Select P or N to start	Start/Stop has been deactivated - move the gear selector to <b>N</b> or <b>P</b> position and start the engine as normal with the <b>START/STOP ENGINE</b> button.	A
	Press Start button	The engine will not start automatically - start the engine as normal with the <b>START/STOP ENGINE</b> button and the gear selector in <b>P</b> or <b>N</b> .	A

A M = Manual gearbox, A = Automatic gearbox.

If a message does not go out following completion of the action then a workshop should be contacted - an authorised Volvo workshop is recommended.

**Foot brake****General**

The car is equipped with two brake circuits. If one brake circuit is damaged then this will mean that the brakes engage at a deeper level and harder pressure on the pedal is needed to produce the normal braking effect.

The driver's brake pedal pressure is assisted by a brake servo.

**WARNING**

The brake servo only works when the engine is running.

If the brake is used when the engine is switched off then the pedal will feel stiff and more force must be used to brake the car.

In very hilly terrain or when driving with a heavy load the brakes can be relieved by using engine braking. Engine braking is most efficiently used if the same gear is used downhill as up.

For more general information on heavy loads on the car, see page 383.

**Anti-lock braking system**

The car is equipped with ABS (Anti-lock Braking System) which prevents the wheels from locking during braking. This means the ability to steer is maintained and it is easier to

swerve to avoid a hazard for example. Vibration may be felt in the brake pedal when this is engaged and this is normal.

A short test of the ABS system is made automatically after the engine has been started when the driver releases the brake pedal. A further automatic test of the ABS system may be made when the car reaches 10 km/h. The test may be experienced as pulses in the brake pedal.

**Emergency brake lights and automatic hazard warning flashers**

Emergency brake lights are activated to alert vehicles behind about sudden braking. The function means that the brake light flashes instead of - as in normal braking - shining with a constant glow.

Emergency brake lights are activated at speeds above 50 km/h if the ABS system is working and/or in the event of sudden braking. Once the car's speed has been braked to below 10 km/h, the brake light stops flashing and returns to a normal constant glow - hazard warning flashers are activated at the same time, which flash until the driver accelerates the car to at least 20 km/h or they are switched off with their button, see page 94.

**Cleaning the brake discs**

Coatings of dirt and water on the brake discs may result in delayed brake function. This delay is minimised by cleaning the brake linings.

Manual cleaning is advisable with wet road surfaces, prior to long-stay parking and after the car has been washed. Carry this out by braking gently during a short period while en route.

**Emergency Brake Assistance**

Emergency Brake Assistance EBA (Emergency Brake Assist) helps to increase brake force and so reduce braking distance. EBA detects the driver's braking style and increases brake force as necessary. The brake force can be reinforced up to the level when the ABS system is engaged. The EBA function is interrupted when the pressure on the brake pedal is reduced.

**NOTE**

When EBA is activated the brake pedal lowers slightly more than usual, depress (hold) the brake pedal as long as necessary. If the brake pedal is released then all braking ceases.



## Foot brake

### Maintenance

To keep the car as safe and reliable as possible, follow the Volvo service intervals as specified in the Service and Warranty Booklet, see page 338.

### ! IMPORTANT

The wear on the brake system's components must be checked regularly.

Contact a workshop for information about the procedure or engage a workshop to carry out the inspection - an authorised Volvo workshop is recommended.

### Symbols in the combined instrument panel

Symbol	Specification
	Constant glow – Check the brake fluid level. If the level is low, fill with brake fluid and check for the cause of the brake fluid loss.
	Constant glow for 2 seconds when the engine is started - automatic function check.

### ⚠ WARNING

If and illuminate at the same time, there may be a fault in the brake system.

If the level in the brake fluid reservoir is normal at this stage, drive carefully to the nearest workshop and have the brake system checked - an authorised Volvo workshop is recommended.

If the brake fluid is below the **MIN** level in the brake fluid reservoir, do not drive further before topping up the brake fluid.

The reason for the loss of brake fluid must be investigated.



## Parking brake

### General

#### WARNING

Always apply the parking brake when parking on a slope - leaving the car in gear, or in **P** if it has automatic transmission, is not sufficient to hold the car in all situations.



The combined instrument panel's warning symbol.

The lever is located between the front seats.

#### Applying the parking brake

1. Press the foot brake pedal down firmly.
2. Pull the lever firmly.

> The combined instrument panel's warning symbol illuminates.

#### NOTE

 - The combined instrument panel's warning symbol illuminates regardless of whether the parking brake is applied slightly or fully.

3. Release the foot brake pedal and make sure that the car is at a standstill position.
  4. If the vehicle moves then the parking brake lever must be applied at least a little more firmly.
- When parking the vehicle, always engage 1st gear (for manual gearbox) or put the gear selector in position **P** (for automatic gearbox).

#### Parking on a hill

If the car is parked facing uphill:

- Turn the wheels **away from** the kerb.

If the car is parked facing downhill:

- Turn the wheels **towards** the kerb.

#### Disengaging the parking brake

1. Press the foot brake pedal down firmly.
2. Pull the lever up slightly, press the button, release the lever and release the button.

> The combined instrument panel's warning symbol extinguishes.

If the driver forgets to release the parking brake – in addition to the illuminated warning lamp – a pinging sound combined with a message in the combined instrument panel alerts the driver of this when the car's speed exceeds 10 km/h.

## HomeLink® \*

### General



HomeLink®<sup>1</sup> is a programmable remote control which is integrated in the rearview mirror and can remotely control up to three different devices (e.g. garage door opener, alarm system, outdoor lighting and indoor lighting etc.) and in doing so replace their remote controls. In addition to the three programmable buttons, there is also an indicator lamp in the panel. HomeLink® cannot be activated when the car is locked from the outside. For more information on HomeLink®, visit: [www.homelink.com](http://www.homelink.com) or ring 00 8000 466 354 65 (or premium rate phone number, +49 6838 907 277).

### WARNING

- If HomeLink® is used to operate a garage door or gate, make sure that there is no-one in the vicinity of the door or gate while it is moving.
- The car should remain outside the garage while a garage door opener is being programmed.
- Do not use HomeLink® for any garage door that does not have safety stop and safety reverse.

Save the original remote controls for future programming (e.g. when changing to another car or for use in another vehicle). It is also recommended that the programming for the buttons is deleted if the car is sold. See the section "Resetting the HomeLink® buttons" on page 135.

### Programming HomeLink®

#### NOTE

In certain vehicles the ignition must be switched on or in "accessory position" before HomeLink® can be programmed or used. If possible, fit new batteries in the remote control that shall be replaced by HomeLink® for faster programming and improved transmission of the radio signal. The HomeLink® buttons should be reset before programming. When this has been done HomeLink® is set in "learn mode" and ready for programming.

1. Press and hold the desired HomeLink® button until the indicator lamp flashes yellow. This indicates that the button is ready for programming.
2. Aim the original remote control towards the HomeLink® button to be programmed and hold it 5-30 cm from the button. Do not obstruct the indicator lamp on HomeLink®.
3. Press and hold the button on the original remote control. Do not release the button until the indicator lamp has changed from a yellow light to either red or green. If the indicator lamp is red – make a new

<sup>1</sup> HomeLink and the HomeLink house symbol are registered trademarks of Johnson Controls, Inc.



## HomeLink® \*

attempt to program the remote control, holding the original remote control at a different distance from the HomeLink® button. A green light indicates that programming was successful.

4. **Depress the HomeLink® button being programmed, hold it depressed for 5 seconds and then release it.** Repeat if necessary until the garage door is activated. If the door is not activated, press the programmed HomeLink® button and hold it depressed and check the indicator lamp.
  - > **Steady green light:** The indicator lamp illuminates with a constant glow when the button is kept depressed, this indicates that the **programming is complete**. The garage door, gate or similar should now be activated when the programmed HomeLink® button is depressed.

**Flashing green light:** The indicator lamp flashes while the button is held depressed. In which case, continue with the programming steps 5-7 in order to complete the programming of a device with rolling code (usually a garage door opener).

5. Locate the "programming button<sup>2</sup>" on the receiver for the garage door for example, normally located close to the antenna's bracket on the receiver.
6. Depress and release the receiver's "programming button". The button flashes for approx. 30 seconds and the next step must be carried out within this period.
7. While the receiver's "programming button" is still flashing, press the button on HomeLink® being programmed and hold it depressed for approx. 3 seconds and then release it. Repeat the press/hold/release sequence up to 3 times to conclude the programming.

### Operation

When HomeLink® is fully programmed it can be used in place of the separate original remote controls.

Press and hold the programmed button<sup>3</sup> until the garage door, alarm system, etc. is activated (may take several seconds). Naturally the original remote controls can still be used in parallel with HomeLink® if required.



### NOTE

If the ignition is switched off, HomeLink® will work for 30 minutes after the driver's door has been opened.

If programming problems persist, contact HomeLink® on: [www.homelink.com](http://www.homelink.com) or ring 00 8000 466 354 65 (or premium rate phone number +49 6838 907 277).

### Resetting the HomeLink® buttons

It is only possible to reset all of the HomeLink® buttons at the same time, not each button individually. However, individual buttons can be reprogrammed, see the following section "Programming individual buttons".

1. Press and hold the two outer buttons on HomeLink®. Do not release them until the indicator lamp has changed from a yellow light to either red or green.
2. Release the buttons.
  - > HomeLink® is now set in so-called "learn mode" and is ready to be reprogrammed, see section "Programming HomeLink®" on page 134.

<sup>2</sup> Button designation and colour vary depending on manufacturer.

<sup>3</sup> The indicator lamp remains lit while the button is held depressed.



### HomeLink® \*

#### Programming individual buttons

To reprogram an individual HomeLink® button, proceed as follows:

1. Depress the required button and **do not release**.
2. When the indicator lamp on HomeLink® starts to flash yellow (after about 10 seconds), release the button and start with step 2 of section "Programming HomeLink®" on page 134.

For more information or to leave comments about HomeLink®, visit: [www.homelink.com](http://www.homelink.com) or ring 00 8000 466 354 65 (or premium rate phone number +49 6838 907 277).



DSTC – Stability and traction control system.....	140
Road sign information - RSI*.....	143
Speed limiter*.....	146
Cruise control*.....	148
Adaptive cruise control*.....	150
Distance Warning*.....	161
City Safety™.....	164
Collision Warning with Auto Brake & Pedestrian Detection*.....	170
Driver Alert System*.....	178
Driver Alert System - DAC*.....	179
Driver Alert System - Lane Keeping Aid*.....	182
Park assist syst*.....	186
Park assist camera*.....	189
Park Assist Pilot - PAP*.....	193
BLIS and CTA*.....	198



G000000

# 04

## DRIVER SUPPORT





## DSTC – Stability and traction control system

### General information on DSTC

The stability and traction control system, DSTC (Dynamic Stability & Traction Control) helps the driver to avoid skidding and improves the car's traction.

The activation of the system during braking may be noticed as a throbbing sound. The car may accelerate slower than expected when the accelerator pedal is depressed.

### WARNING

The stability and traction control system is a supplementary function - it cannot handle all situations in all road conditions.

The driver always bears responsibility for ensuring that the vehicle is driven safely and that applicable road traffic rules and regulations are followed.

### Active Yaw Control

The function limits the driving and brake force of the wheels individually in order to stabilise the car.

### Spin Control

The function reduces engine power if the drive wheels slip against the underlying surface in order to maintain stability and traction.

### Traction control system

The function is active at low speed and transfers power from the driving wheel that is spinning to the one that is not.

### Engine drag control - EDC

EDC (Engine Drag Control) prevents involuntary wheel locking, e.g. after shifting down or engine braking when driving in low gears on slippery road surfaces.

Involuntary wheel locking while driving can, amongst other things, impair the driver's ability to steer the car.

### Corner Traction Control – CTC

CTC compensates for understeer and allows higher than normal acceleration in a bend without wheelspin on the inner wheel, e.g. on an arcing motorway entrance road to quickly reach the prevailing traffic speed.

### Driver Steering Recommendation – DSR

DSR (Driver Steering Recommendation) helps the driver steer the car in the right direction when there is reduced traction or when the ABS system engages.

The primary role of the DSR function is to help the driver steer in the right direction when the car is skidding.

DSR engages by applying slight torque to the steering wheel in the direction in which the

car should be steered to maintain/achieve maximum possible traction and stabilise the car.

### Trailer Stability Assist\* - TSA

The function serves to stabilise the car and trailer combination if it begins to snake, see page 309.

### NOTE

The function is deactivated if the driver selects **Sport** mode.

### Operation

#### Selection of level - Sport mode

The DSTC system is always activated - it cannot be deactivated.

However, the driver can select the **Sport** mode, which allows for a more active driving experience. In **Sport** mode the system detects whether the accelerator pedal, steering wheel movements and cornering are more active than in normal driving and then allows controlled skidding with the rear section up to a certain level before it intervenes and stabilises the car.

If the driver stops a controlled skid by releasing the accelerator pedal then the DSTC system intervenes and stabilises the car.



**DSTC – Stability and traction control system**

With **Sport** mode, maximum traction is obtained if the car has become stuck, or when driving on a loose surface - e.g. sand or deep snow.

Proceed as follows to select **Sport** mode:

1. Press the centre console button **MY CAR** and search in the screen's menu system and locate **My V40 → DSTC**. (For information on the menu system, see page 207).

2. Uncheck the box and back out of the menu system with **EXIT**.
  - > The system then allows a more sporty driving style.

The **Sport** mode is active until the driver deselects it or until the engine is switched off - after the engine is started the next time the DSTC system is back in its normal mode again.

04

**Symbols and text messages**

Symbol <sup>A</sup>	Message	Specification
	<b>DSTC Temporarily OFF</b>	DSTC system temporarily reduced due to excessive brake disc temperature. - The function is reactivated automatically when the brakes have cooled.
	<b>DSTC Service required</b>	DSTC system disengaged. <ul style="list-style-type: none"> <li>• Stop the car in a safe place, switch off the engine and start it again.</li> <li>• Visit a workshop if the message remains - an authorised Volvo workshop is recommended.</li> </ul>
 and 	"Message"	There is a message in the combined instrument panel - Read it!
	Constant glow for 2 seconds.	System check when the engine is started.





### DSTC – Stability and traction control system


Symbol <sup>A</sup>	Message	Specification
	Flashing light.	DSTC system is being activated.
		<b>Sport</b> mode is activated.

<sup>A</sup> The symbols are schematic.



## Road sign information - RSI\*

### General information on RSI

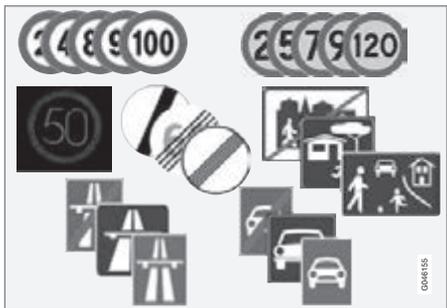

Examples of readable speed related<sup>1</sup> signs.

The Road sign information function (RSI – Road Sign Information) helps the driver to remember which road signs the car has passed through information on - among other things - the current speed, the start/end of a motorway or road, and when overtaking is prohibited.


If both a sign for motorway/road for motorised traffic and a sign showing the maximum permitted speed are passed, RSI decides to show the sign symbol for maximum permitted speed.

**WARNING**

RSI does not work in all situations but is designed merely as a supplementary aid.

The driver always bears ultimate responsibility for ensuring that the vehicle is driven safely and that applicable road traffic rules and regulations are followed.

### Operation

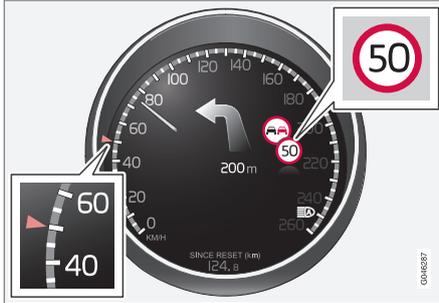

Recorded speed information<sup>1</sup>.

When RSI has recorded a road sign with an imposed speed, the combined instrument panel displays the sign as a symbol.




Together with the symbol for the current speed limit, a sign showing that overtaking is prohibited may also be displayed where appropriate.

### End of restriction or motorway

A corresponding road sign is shown in the combined instrument panel for approx. 10 seconds in situations where RSI detects a sign that involves the end of a speed limit - or other speed-related information, e.g. end of a motorway.

Examples of such signs are:



End of all restrictions.



End of motorway.

<sup>1</sup> Road signs shown in the combined instrument panel are market-dependent - the illustrations in the manual only show a few examples.




## 04 Driver support

### Road sign information - RSI\*

Following which, the sign information is hidden until the next speed-related sign is detected.


#### Additional signs

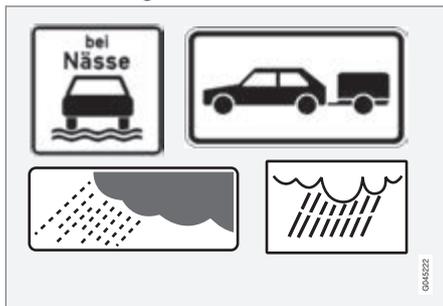


Examples of additional signs<sup>1</sup>.

Sometimes different speed limits are signposted for the same road - an additional sign then indicates the circumstances under which the different speeds apply. The road section may be particularly susceptible to accidents in rain and/or fog, for example.

An additional sign relating to rain is displayed only if the windscreen wipers are in use.



The speed applicable on an exit is indicated in certain markets by means of an additional sign containing an arrow.



Speed signs linked to this type of additional sign are displayed only if the driver is using the direction indicator. Some speeds are applicable only after a specific distance or at a certain time of day, for example. The driver's attention is drawn to the situation by means of a symbol for an additional sign under

the symbol showing speed.

#### Display of additional information



A symbol for additional sign in the form of an empty frame under the combined instrument panel's speed symbol means that the RSI has detected an additional sign with supplementary information for the current speed limit.

#### Setting in MY CAR

There are options for RSI in the **MY CAR** menu system, see page 209.

#### Road sign information On/Off



The combined instrument panel's speed symbol display can be disabled. To deactivate the RSI function:

- Uncheck the option **Road Sign Information** at **Settings** → **Car settings** → **Road Sign Information** and go back out by pressing **EXIT**.

<sup>1</sup> Road signs shown in the combined instrument panel are market-dependent - the illustrations in the manual only show a few examples.



## Road sign information - RSI\*

## Speed warning



The driver can opt to receive a warning when the applicable speed limit is exceeded by 5 km/h or more. This warning is given by the symbol showing the applicable maximum speed temporarily flashing when this speed is exceeded.

To activate speed warning:

- Check the option **Speed alert** at **Settings → Car settings → Speed alert** and go back out by pressing **EXIT**.

## Limitations

The RSI function's camera sensor is limited - just like the human eye. Find out more about this on page 175.

Signs which indirectly provide information on a prevailing speed limit, e.g. name signs for towns/districts, are not recorded by the RSI function.

Here are some other examples of what can disrupt the function:

- Faded signs
- Signs positioned on bends
- Rotated or damaged signs
- Concealed or poorly positioned signs
- Signs completely or partly covered with frost, snow and/or dirt.




## Speed limiter\*

### General information on the speed limiter

A (Speed Limiter) can be regarded as a reverse cruise control - the driver regulates the speed using the accelerator pedal but is prevented from accidentally exceeding a pre-selected/set speed by the speed limiter.

### Operation

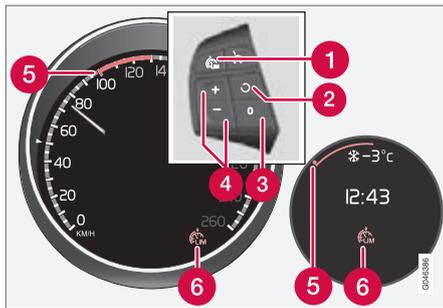

Steering wheel keypad and combined instrument panels, Digital and Analogue.

- 1 Speed limiter - On/Off.
- 2 Standby mode ceases and the stored speed is resumed.
- 3 Standby mode
- 4 Activate and adjust the max. speed.

- 5 Selected speed
- 6 Speed limiter active

### Switch on and activate

When the speed limiter is active, its symbol (6) is shown in combination with a mark (5) by the set maximum speed in the combined instrument panel.

Selection and storage of the highest possible speed in the memory can be made both during a journey and while stationary.

### While driving

1. Press the steering wheel button  to switch on the speed limiter.
  - > The symbol (6) for speed limiter illuminates in the combined instrument panel.
2. When the car is moving at the desired highest possible speed: Press one of the steering wheel buttons  or  until the combined instrument panel shows a mark (5) next to the desired maximum speed.
  - > The speed limiter is then active and the selected max. speed is stored in the memory.

### When stationary

1. Press the steering wheel button  to switch on the speed limiter.
2. Scroll with the  button until the combined instrument panel shows a mark (5) next to the desired maximum speed.
  - > The speed limiter is then active and the selected max. speed is stored in the memory.

### Changing the speed

To change the stored speed:

- Adjust with short presses on  or  - every press gives +/- 5 km/h. The last presses made are stored in the memory.

To adjust +/- 1 km/h:

- Hold down the button and release it when the combined instrument panel shows a mark (5) next to the desired maximum speed.

### Temporary deactivation - standby mode

To temporarily deactivate the speed limiter and set it in standby mode:

- Press .
  - > The combined instrument panel's mark (5) changes colour from GREEN to WHITE (Digital) or from WHITE to

\* Option/accessory, for more information, see Introduction.

**Speed limiter\***

GREY (Analogue) and the driver can temporarily exceed the set maximum speed.

The speed limiter is reactivated with one press on . The mark (5) then changes colour from WHITE to GREEN (Digital) or GREY to WHITE (Analogue) and the car's maximum speed is limited again.

**Temporary deactivation with the accelerator pedal**

The speed limiter can also be set in standby mode with the accelerator pedal, e.g. for rapidly accelerating the car out of a situation:

- Depress the accelerator pedal fully.
  - > The combined instrument panel shows the stored maximum speed with a coloured mark (5) and the driver can temporarily exceed the set maximum speed – the mark (5) changes colour from GREEN to WHITE (Digital) or WHITE to GREY (Analogue) during that time.

The speed limiter is automatically reactivated after the accelerator pedal is released and the car's speed is slowed down to below the selected/stored maximum speed - the mark (5) changes colour from WHITE to GREEN (Digital) or GREY to WHITE (Analogue)

and the car's maximum speed is again limited.

**Alarm for speed exceeded**

On steep roads the engine braking effect may be inadequate and the selected maximum speed exceeded. The driver is alerted about this with an acoustic signal.

The signal is active until the driver has slowed to below the selected maximum speed.

**NOTE**

The alarm is only activated after 5 seconds if the speed has been exceeded by at least 3 km/h provided that none of the buttons  or  has been depressed during the last half minute.

**Deactivate**

To deactivate the speed limiter:

- Press the steering wheel button .
  - > The combined instrument panel's speed limiter symbol (6) and the set speed mark (5) are extinguished. The selected and stored speed are thus deleted from the memory and cannot be resumed with the  button.

The driver can then use the accelerator pedal to choose a speed without limitation.



# 04 Driver support

## Cruise control\*

### General information on CC


The cruise control (CC – Cruise Control) helps the driver maintain an even speed, resulting in more relaxing driving on motorways and long, straight roads with regular traffic flows.

### WARNING


The driver must always be observant with regard to the traffic conditions and intervene when the cruise control is not maintaining a suitable speed and/or suitable distance.

The driver always bears ultimate responsibility for ensuring that the vehicle is driven safely.

### Operation

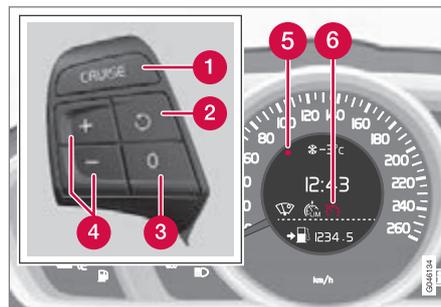

The steering wheel buttons and combined instrument panel in cars **without** speed limiter<sup>1</sup>.

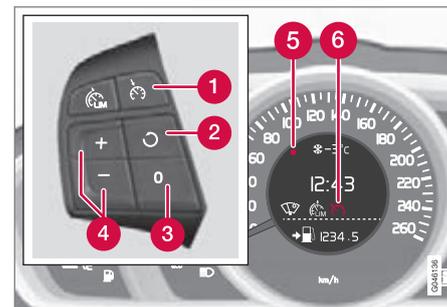

The steering wheel buttons and combined instrument panel in cars **with** speed limiter<sup>1</sup>.

- 1 Cruise control - On/Off.
- 2 Standby mode ceases and the stored speed is resumed.
- 3 Standby mode
- 4 Activate and adjust the speed.
- 5 Selected speed (GREY = Standby mode).
- 6 Cruise control active - WHITE symbol (GREY = Standby mode).

### Activating and setting the speed

To enable cruise control:

- Press the steering wheel button

<sup>1</sup> A Volvo dealer has updated information about what applies in each respective market.

\* Option/accessory, for more information, see Introduction.

**Cruise control\***

- > The cruise control symbol (6) in the combined instrument panel changes from GREY to WHITE and shows that the cruise control is in standby mode.

To activate cruise control:

- At the required speed - press the steering wheel button or .
- > The current speed is stored in the memory and the combined instrument panel's marking (5) illuminates at the selected speed.

**NOTE**

Cruise Control cannot be enabled at speeds below 30 km/h.

**Changing the speed**

To change the stored speed:

- Adjust with short presses on or - every press gives +/- 5 km/h. The last presses made are stored in the memory.

To adjust +/- 1 km/h:

- Hold down the button and release it at the required speed.

A temporary increase in speed with the accelerator pedal, e.g. during overtaking, does not

affect the cruise control setting - the car returns to the set speed when the accelerator pedal is released.

**NOTE**

If any of the Cruise Control buttons are held depressed for several minutes then it is blocked and deactivated. To be able to reactivate Cruise Control, the car must be stopped and the engine restarted.

**Temporary deactivation - standby mode**

To temporarily disengage cruise control and set it in standby mode:

- Press .
- > The combined instrument panel's marking (5) and symbol (6) change colour from WHITE to GREY.

**Automatic standby mode**

Cruise control is temporarily disengaged and set in standby mode if:

- wheels lose traction
- the foot brake is used
- speed falls below approx. 30 km/h
- the clutch pedal is depressed for longer than 1 minute<sup>2</sup>

- the gear selector/lever is moved to neutral position **N** (automatic gearbox)
- the driver maintains a speed higher than the set speed for longer than 1 minute.

The driver must then regulate the speed.

**Resume set speed**

To reactivate the cruise control from standby mode:

- Press the steering wheel button .
- > The combined instrument panel's marking (5) and symbol (6) change colour from GREY to WHITE and the speed is then set to the last speed stored.

**NOTE**

A marked speed increase may occur once the speed has been resumed by selecting .

**Deactivate**

The cruise control is switched off with the steering wheel button (1) or by switching off the engine - the set speed is deleted from the memory and cannot be resumed with the button.

<sup>2</sup> Disengaging and selecting a higher or lower gear does not involve standby mode.



## Adaptive cruise control\*

### General information on ACC

The adaptive cruise control (ACC – Adaptive Cruise Control) helps the driver maintain a safe distance from the vehicle ahead. Adaptive cruise control provides a more relaxing driving experience on long journeys on motorways and long straight main roads in smooth traffic flows.

The driver sets the desired speed and time interval to the car in front. When the radar detector detects a slower vehicle in front of the car, the speed is automatically adapted to that. When the road is clear again the car returns to the selected speed.

If the adaptive cruise control is switched off or set to the standby mode and the car comes too close to a vehicle in front, then the driver is warned instead by Distance Warning (see page 161) about the short distance.

### WARNING

The driver must always be observant with regard to the traffic conditions and intervene when the adaptive cruise control is not maintaining a suitable speed or suitable distance.

The adaptive cruise control cannot handle all traffic, weather and road conditions.

Read the whole of this section for information on the limitations of the adaptive cruise control. The driver must be familiar with this information before using the adaptive cruise control.

The driver always bears responsibility for maintaining the correct distance and speed, even when the adaptive cruise control is being used.


### IMPORTANT

Maintenance of adaptive cruise control components must only be performed at a workshop - an authorised Volvo workshop is recommended.

### Automatic gearbox

Cars with automatic gearbox have enhanced functionality with the adaptive cruise control's Queue Assistant, see page 155.

### Function

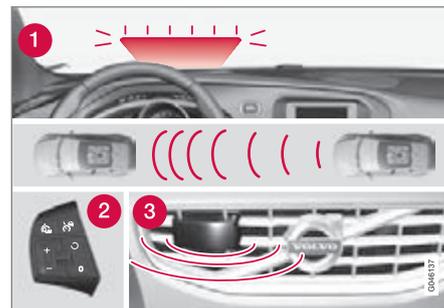

Function overview<sup>1</sup>.

- 1** Warning lamp - braking by driver required
- 2** Steering wheel keypad
- 3** Radar sensor

Adaptive cruise control consists of a cruise control system and a coordinated spacing system.

<sup>1</sup> NOTE: The illustration is schematic - details may differ depending on car model.



## Adaptive cruise control\*

### **WARNING**

Adaptive cruise control is not a collision avoidance system. The driver must intervene if the system does not detect a vehicle in front.

The adaptive cruise control does not brake for humans or animals, and not for small vehicles such as bicycles and motorcycles. Nor for oncoming, slow or stationary vehicles and objects.

Do not use the adaptive cruise control, for example, in city traffic, in dense traffic, at junctions, on slippery surfaces, with a lot of water or slush on the road, in heavy rain/snow, in poor visibility, on winding roads or on slip roads.

The distance to the vehicle ahead is mainly measured by a radar sensor. Cruise control regulates the speed with acceleration and braking. It is normal for the brakes to emit a low sound when they are being used by the adaptive cruise control.

### **WARNING**

The brake pedal moves when Cruise Control brakes. Do not rest your foot beneath the brake pedal as it may become trapped.

The adaptive cruise control aims to follow the vehicle ahead in the same lane at a time interval set by the driver. If the radar sensor cannot see any vehicle in front then the car will instead maintain the cruise control's set speed. This also happens if the speed of the vehicle in front exceeds the cruise control's set speed.

The adaptive cruise control aims to control the speed in a smooth way. In situations that demand sudden braking the driver must brake himself/herself. This applies with large differences in speed, or if the vehicle in front brakes heavily. Due to limitations in the radar sensor, braking may come unexpectedly or not at all, see page 157.

The adaptive cruise control can be activated to follow another vehicle at speeds from 30 km/h<sup>2</sup> up to 200 km/h. If the speed falls below 30 km/h or if the engine speed becomes too low, the cruise control is set in standby mode at which automatic braking ceases - the driver must then take over himself/herself to maintain a safe distance to the vehicle ahead.

### **Warning lamp - braking by driver required**

Adaptive cruise control has a braking capacity that is equivalent to more than 40% of the car's braking capacity.

If the car needs to be braked more heavily than cruise control capacity and the driver does not brake, then the cruise control uses the collision warning system's warning lamp and warning sound (see figure on page 170) to alert the driver that immediate intervention is required.

### **NOTE**

The warning lamp may be difficult to see in strong sunlight or when wearing sunglasses.

### **WARNING**

Cruise Control warns only of vehicles which the radar sensor has detected. Hence the warning may not be given, or it may be given with a certain delay. Do not wait for a warning without braking when so required.

<sup>2</sup> Queue Assistant (in cars with automatic gearbox) can operate in the range of 0-200 km/h, see page 155.

\* Option/accessory, for more information, see Introduction.



# 04 Driver support

## Adaptive cruise control\*


### Steep roads and/or heavy load

Bear in mind that the adaptive cruise control is primarily intended for use when driving on level road surfaces. It may have difficulty in keeping the correct distance from the vehicle ahead when driving on steep downhill slopes, with a heavy load or with a trailer - in which case, be extra attentive and ready to slow down.

### Operation


The design of the steering wheel keypad differs depending on whether the car is equipped with the speed limiter<sup>3</sup>.

### WITH speed limiter

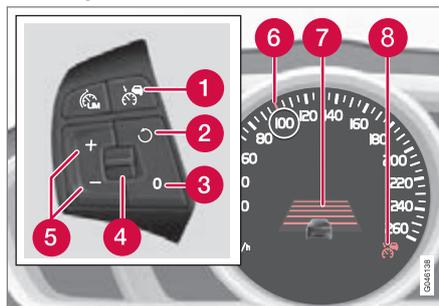

- 1 Cruise control - On/Off.
- 2 Standby mode ceases and the stored speed is resumed.
- 3 Standby mode
- 4 Time interval - Increase/decrease.
- 5 Activate and adjust the speed.
- 6 Green marking at stored speed (WHITE = standby mode).
- 7 Time interval
- 8 ACC is active at the GREEN symbol (WHITE = standby mode).

### WITHOUT speed limiter

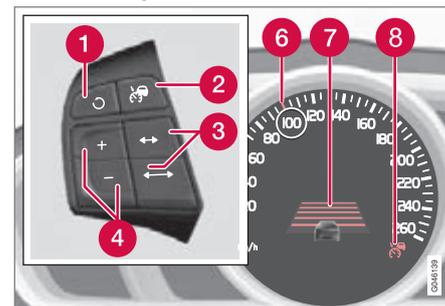

- 1 Standby mode ceases and the stored speed is resumed.
- 2 Cruise control - On/Off or Standby mode.
- 3 Time interval - Increase/decrease.
- 4 Activate and adjust the speed.
- 5 (Not used)
- 6 Green marking at stored speed (WHITE = standby mode).
- 7 Time interval
- 8 ACC is active at the GREEN symbol (WHITE = standby mode).

<sup>3</sup> A Volvo dealer has updated information about what applies in each respective market.



## Adaptive cruise control\*

### Activating and setting the speed

To enable cruise control:

- Press the steering wheel button - a similar WHITE symbol is illuminated in the combined instrument panel (6) which shows that the cruise control is in standby mode.

To activate cruise control:

- At the required speed - press the steering wheel button or .
- > The current speed is stored in the memory, the combined instrument panel shows a "magnifying glass" around the selected speed for a second or so and its marking (6) changes from WHITE to GREEN.



When this symbol changes colour from WHITE to GREEN, the cruise control is active and the car maintains the stored speed.



Only when the symbol shows a picture of another vehicle is the **distance** to the vehicle in front controlled by the cruise control.



At the same time a speed range is marked:

- the higher speed with GREEN marking (6) is the preprogrammed speed
- the lower speed is the speed of the car in front.

### Changing the speed

To change the stored speed:

- Adjust with short presses on or - every press gives +/- 5 km/h. The last presses made are stored in the memory. If speed is increased using the accelerator pedal prior to pressing the button, then it is the car's current speed when the button is pressed that is stored in the cruise control.

To adjust +/- 1 km/h:


- Hold down the button and release it at the required speed.

**NOTE**

If any of the Cruise Control buttons are held depressed for several minutes then it is blocked and deactivated. To be able to reactivate Cruise Control, the car must be stopped and the engine restarted.

In certain situations, cruise control cannot be activated. In this case, the combined instrument panel shows **Cruise control Unavailable**, see page 159.

### Set time interval



Different time intervals to the vehicle in front can be selected and shown in the combined instrument panel as 1-5 horizontal lines - the more lines the longer the time interval. One line corresponds to approximately 1 second to the vehicle in front, 5 lines approximately 3 seconds.

To set/change the time interval:

- Turn the steering wheel button set's thumbwheel (or use the buttons for cars without Speed limiters).

At low speed, when the distances are short, the adaptive cruise control increases the time interval slightly.

\* Option/accessory, for more information, see Introduction.



## Adaptive cruise control\*

The adaptive cruise control allows the time interval to vary noticeably in certain situations in order to allow the car to follow the vehicle in front smoothly and comfortably.

Note that a short time interval only allows the driver a short time to react and take action if any unforeseen traffic problem should arise.

The same symbol is also shown when Distance Warning is activated, see page 161.

### NOTE

Only use the time intervals permitted by local traffic regulations.

If Cruise Control does not appear to react when activated, this may be because the time distance to the car in front is preventing an increase in speed.

The higher the speed the longer the calculated distance in metres for a given time interval.

### Temporary deactivation - standby mode

To temporarily disengage adaptive cruise control and set it in standby mode:

- Press the steering wheel button 



This symbol and stored speed marking then changes colour from GREEN to WHITE.

### Keypad without Speed limiter\*

To temporarily disengage cruise control and set it in standby mode:

- Press the steering wheel button .

### Standby mode due to driver intervention

The adaptive cruise control is temporarily disengaged and set automatically in standby mode if:

- the foot brake is used
- the clutch pedal is depressed for longer than 1 minute<sup>4</sup>
- the gear selector/lever is moved to neutral position **N** (automatic gearbox)
- the driver maintains a speed higher than the set speed for longer than 1 minute.

The driver must then regulate the speed.

A temporary increase in speed with the accelerator pedal, e.g. during overtaking, does not affect the cruise control setting - the car returns to the last stored speed when the accelerator pedal is released.

### Automatic standby mode

The adaptive cruise control is dependent on other systems, such as DSTC (see page 140). If any of these systems stop working then cruise control is automatically deactivated.

In the event of automatic deactivation a signal will sound and the message **Cruise control Cancelled** is shown in the combined instrument panel. The driver must then intervene and adapt the speed and distance to the vehicle ahead.

An automatic deactivation can be due to:

- the driver opens the door
- the driver takes off his seatbelt
- engine speed is too low/high
- speed has fallen below 30 km/h<sup>5</sup>
- wheels lose traction
- brake temperature is high
- the radar sensor is covered e.g. by wet snow or heavy rain (radar waves blocked).

### Resume set speed

Adaptive cruise control in standby mode is reactivated with one press on the steering wheel button  - the speed is then set to the last stored speed.

<sup>4</sup> Disengaging and selecting a higher or lower gear does not involve standby mode.

<sup>5</sup> Does not apply to a car with Queue Assistant - it manages right down to stationary.



## Adaptive cruise control\*

**NOTE**  
 A marked speed increase may occur once the speed has been resumed by selecting

**Overtaking another vehicle**  
 When the car is following another vehicle and the driver indicates an impending overtaking manoeuvre with the direction indicator<sup>6</sup>, the adaptive cruise control helps to briefly accelerate the car towards the vehicle in front.

This function is active at speeds above 70 km/h.

**WARNING**  
 Be aware that this function can be activated in more situations other than during overtaking, e.g. when a direction indicator is used to indicate a change of lane or exit to another road - the car will then accelerate briefly.

**Deactivate**  
**Keypad with Speed limiter**  
 The adaptive cruise control is disengaged with a **short** press of the steering wheel but-

ton . The set speed is cleared and cannot be resumed with the button.

**Keypad without Speed limiter**  
 A **short** press on the steering wheel button sets the adaptive cruise control in standby mode. With a further short press the cruise control is deactivated. The set speed is cleared and cannot be resumed with the button.

**Switch from ACC to CC**  
 A button press can be used to deactivate the adaptive element (spacing system) in the adaptive cruise control, with the car then only following the set speed.

- **Hold down** the steering wheel button - the combined instrument panel's symbol changes from to .
- > This activates the standard cruise control CC (Cruise Control), see page 148.

**WARNING**  
 The car no longer brakes automatically after switching from ACC to CC - it merely follows the set speed.

**Switch from CC back to ACC**  
 Deactivate CC with 1-2 presses on as described under the heading "Deactivate". ACC will be activated the next time the system is switched on.

**Queue Assistant**  
 In cars with automatic gearbox the adaptive cruise control is supplemented with the Queue Assist function (also referred to as "Queue Assist").

Queue Assistant has the following functions:

- Extended speed range - also below 30 km/h and at standstill
- Change of target
- Automatic braking ceases when stationary

Note that the lowest programmable speed for the adaptive cruise control is 30 km/h - even though the cruise control is capable of following another vehicle down to a standstill, a lower speed **cannot** be selected.

<sup>6</sup> On left flash only in left-hand-drive car, or right flash in right-hand-drive car.



## Adaptive cruise control\*

### Extended speed range

#### NOTE

In order to activate the cruise control the driver's door must be closed and the driver must be wearing the seatbelt.

With an automatic gearbox, the adaptive cruise control can follow another vehicle within the range 0-200 km/h.

#### NOTE

Activation of the cruise control below 30 km/h requires a vehicle in front within a reasonable distance.

For shorter stops in connection with inching in slow traffic or at traffic lights driving is automatically resumed if the stops do not exceed approx. 3 seconds - if it takes longer before the car in front starts moving again then the cruise control is set in standby mode with automatic braking. The driver must then reactivate it in one of the following ways:


- Press the steering wheel button .
- or
- Depress the accelerator pedal.
- > The cruise control will then resume following the vehicle in front.

#### NOTE

Queue Assist can keep the car stationary for a maximum of 4 minutes - then the brakes release.

See more information under the header below, "Cessation of automatic braking when stationary".

### Change of target

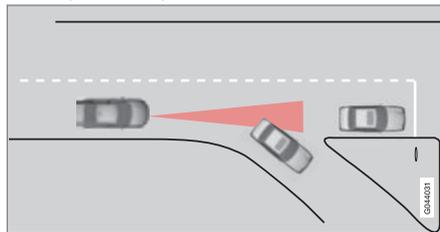

*If the target vehicle in front suddenly turns then there may be stationary traffic in front.*

When the adaptive cruise control is following another vehicle at speeds **below** 30 km/h and changes target from a moving to a stationary vehicle, the cruise control will slow down for the stationary vehicle.

#### WARNING

When the cruise control is following another vehicle at speeds **in excess of** 30 km/h and the target is changed from a moving vehicle to a stationary vehicle, the cruise control will ignore the stationary vehicle and instead select the stored speed.

- The driver must intervene him/herself and brake.

### Automatic standby mode with change of target

The adaptive cruise control is disengaged and set in standby mode:

- when the speed is below 5 km/h and cruise control is not sure whether the target object is a stationary vehicle or some other object, e.g. a speed bump.
- when the speed is below 5 km/h and the vehicle in front turns off so the cruise control no longer has a vehicle to follow.

### Termination of automatic braking at a standstill

In the following situations, Queue Assist stops automatic braking at a standstill:

- the driver opens the door
- the driver takes off his seatbelt



## Adaptive cruise control\*

This means that the brakes are released and the car will start to roll - the driver must therefore intervene and brake the car himself in order to maintain its position.

**! IMPORTANT**

Queue Assist can keep the car stationary for a maximum of 4 minutes - then the brakes release.

The driver's attention is drawn to this over several stages, with increasing intensity:

1. Acoustic alarm (pinging) and text message.
2. A warning lamp in the windscreen also starts to flash.
3. "Stabbing" braking occurs.

Queue Assist releases the foot brake and is set to standby mode in these situations as well:

- the driver puts his/her foot on the brake pedal
- the gear selector is moved to **P**, **N** or **R** position
- the driver sets the cruise control in standby mode
- the parking brake is applied.

### The radar sensor and its limitations

The radar sensor is used - apart from by Adaptive cruise control - by the following functions as well:

- Collision Warning with Auto Brake, see page 170
- Distance Warning, see page 161.

The function of the radar sensor is to detect cars or larger vehicles in the same direction, in the same lane.

Modification of the radar sensor could result in it being illegal to use.

**! IMPORTANT**

In the event of visible damage to the car's grille, or if you suspect that the radar sensor may be damaged:

- Contact a workshop - an authorised Volvo workshop is recommended.

The function may completely or partially disappear - or malfunction - if the grille, the radar sensor or its bracket is damaged or has loosened.

**! WARNING**

The driver must always be observant with regard to the traffic conditions and intervene when the adaptive cruise control is not maintaining a suitable speed or suitable distance.

The adaptive cruise control cannot handle all traffic, weather and road conditions.

Read the whole of this section for information on the limitations of the adaptive cruise control. The driver must be familiar with this information before using the adaptive cruise control.

The driver always bears responsibility for maintaining the correct distance and speed, even when the adaptive cruise control is being used.

**! WARNING**

Accessories or other objects such as auxiliary lamps must not be fitted in front of the grille.

04

\* Option/accessory, for more information, see Introduction.



## Adaptive cruise control\*

### WARNING

Adaptive cruise control is not a collision avoidance system. The driver must intervene if the system does not detect a vehicle in front.

The adaptive cruise control does not brake for humans or animals, and not for small vehicles such as bicycles and motorcycles. Nor for oncoming, slow or stationary vehicles and objects.

Do not use the adaptive cruise control, for example, in city traffic, in dense traffic, at junctions, on slippery surfaces, with a lot of water or slush on the road, in heavy rain/snow, in poor visibility, on winding roads or on slip roads.

The capacity of the radar sensor to detect vehicles in front is reduced significantly:

- if the radar sensor becomes blocked and cannot detect other vehicles e.g. in heavy rain or slush, or if other objects have collected in front of the radar sensor.


### NOTE

Keep the area in front of the radar sensor clean - see the "Maintenance" page 173

- if the speed of vehicles in front is significantly different from your own speed.

### Examples where the cruise control does not work optimally

The radar sensor has a limited field of vision. In some situations another vehicle is not detected, or the detection is made later than expected.

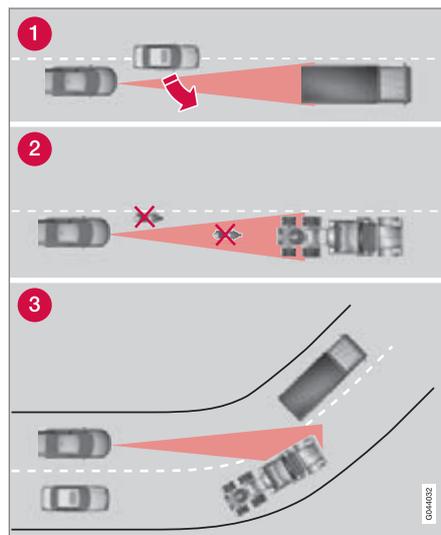

ACC field of vision.

- 1 Sometimes the radar sensor is late at detecting vehicles at close distances, e.g. a vehicle that drives in between the car and vehicles in front.
- 2 Small vehicles, such as motorcycles, or vehicles not driving in the centre of the lane can remain undetected.
- 3 In bends the radar sensor may detect the wrong vehicle or lose a detected vehicle from view.

### Fault tracing and action

If the combined instrument panel shows the message **Radar blocked** See manual this means that the radar signals from the radar sensor are blocked and that vehicles in front of the car cannot be detected.

In turn this means that - apart from Adaptive Cruise Control - Distance Warning and Collision Warning with Auto Brake functions are not operating either.

The following table presents examples of possible causes for a message being shown along with the appropriate action.



**Adaptive cruise control\***

Cause	Action
The radar surface in the grille is dirty or covered with ice or snow.	Clean the radar surface in the grille from dirt, ice and snow.
Heavy rain or snow blocking the radar signals.	No action. Sometimes the radar does not work during heavy rain or snowfall.
Water or snow from the road surface swirls up and blocks the radar signals.	No action. Sometimes the radar does not work on a very wet or snowy road surface.
The radar surface has been cleaned but the message remains.	Wait. It could take several minutes for the radar to sense that it is no longer blocked.

**Symbols and text messages**

Symbol <sup>A</sup>	Message	Specification
	The symbol is WHITE	Adaptive cruise control is set to standby mode.
	The symbol is GREEN	The car maintains the stored speed.
		Standard cruise control is selected manually.
	<b>DSTC Normal to enable Cruise</b>	The adaptive cruise control cannot be activated until <b>DSTC</b> has been set to Normal position - see page 140.
	<b>Cruise control Cancelled</b>	The adaptive cruise control has been deactivated - the driver has to regulate the speed himself.

04

\* Option/accessory, for more information, see Introduction.





## Adaptive cruise control\*

Symbol <sup>A</sup>	Message	Specification
	<b>Cruise control Unavailable</b>	The adaptive cruise control cannot be activated. This could be due to: <ul style="list-style-type: none"> <li>• brake temperature is high</li> <li>• the radar sensor is blocked by e.g. wet snow or rain.</li> </ul>
	<b>Radar blocked See manual</b>	The adaptive cruise control is temporarily disengaged. <ul style="list-style-type: none"> <li>• The radar sensor is blocked and cannot detect other vehicles. For example, in the event of heavy rain or if slush has collected in front of the radar sensor.</li> </ul> The driver can then choose to switch to ordinary Cruise control (CC), see page 155 - a text message provides information on appropriate alternatives. Read about the limitations of the radar sensor, see page 157.
	<b>Cruise control Service required</b>	The adaptive cruise control is disengaged. <ul style="list-style-type: none"> <li>• Contact a workshop - an authorised Volvo workshop is recommended.</li> </ul>
	<b>Press Brake To hold + acoustic alarm + warning light in windscreen + "pulling" brakes</b> (Only with Queue Assistant)	The car is at a standstill and the adaptive cruise control will release the foot brake, which is why the car may start rolling soon. <ul style="list-style-type: none"> <li>• The driver must brake himself/herself. The message remains and the alarm sounds until the driver depresses the brake pedal or uses the accelerator pedal.</li> </ul>
	<b>Below 30 km/h Only following</b> (Only with Queue Assistant)	Shown with attempts to activate the adaptive cruise control at speeds below 30 km/h without a vehicle in front within the activation distance (approx. 30 metres).

<sup>A</sup> The symbols are schematic.




## Distance Warning\*

### General

Distance Warning (Distance Alert) is a function that informs the driver about the time interval to vehicles in front.

Distance Warning is active at speeds above 30 km/h and only reacts to vehicles driving in front of the car, in the same direction. No distance information is provided for oncoming, slow or stationary vehicles.

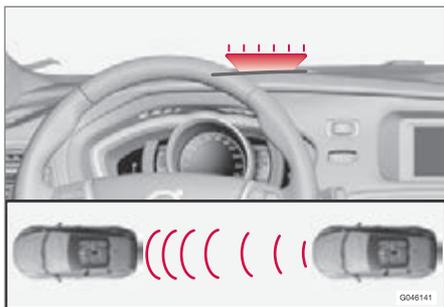

Orange warning lamp<sup>1</sup>.

An orange warning lamp in the windscreen illuminates with a constant glow if the distance to the vehicle in front is shorter than the set time interval.

### NOTE

Distance warning is deactivated during the time the adaptive cruise control is active.

### WARNING

Distance warning only reacts if the distance to the vehicle ahead is shorter than the preset value - the speed of the driver's vehicle is not affected.


### Operation



Press the button in the centre console to switch the function on or off. The function is switched on if one lamp is illuminated in the button.

Some combinations of the selected equipment leave no vacant space for a button in the centre console - in which case the function is handled by the car's menu system **MY CAR** under **Settings** → **Car settings** → **Distance Alert**. For a description of the menu system - see page 207.

### Set time interval

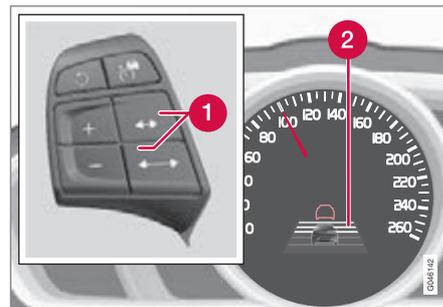

Controls and symbol for time interval.

- 1 Time interval - Increase/decrease.
- 2 Time interval - On.

<sup>1</sup> NOTE: The illustration is schematic - details may vary depending on car model.



### Distance Warning\*



Different time intervals to the vehicle in front can be selected and shown in the combined instrument panel as 1-5 horizontal lines - the more lines the longer the time interval. One line corre-

sponds to approximately 1 second to the vehicle in front, 5 lines approximately 3 seconds.

The same symbol is also shown when adaptive cruise control is activated.

#### NOTE

The higher the speed the longer the calculated distance in metres for a given time interval.

The set time interval is also used by the Adaptive Cruise Control function, see page 150.

Only use the time interval permitted by the local traffic regulations.

#### Limitations

The function uses the same radar sensor as adaptive cruise control and the collision warning system with auto brake. For more information on the radar sensor and its limitations, see page 157.

#### NOTE

Strong sunlight, reflections or strong variations in light intensity, as well as wearing sunglasses, could mean that the warning light in the windscreen cannot be seen.

Poor weather or winding roads could affect the radar sensor's capacity to detect vehicles in front.

The size of other vehicles could also affect detection capacity, e.g. motorcycles. This could mean that the warning lamp illuminates at a shorter distance than the setting or that the warning is temporarily absent.

Extremely high speeds can also cause the lamp to illuminate at a shorter distance than that set due to limitations in sensor range.



**Distance Warning\***

**Symbols and text messages**

Symbol <sup>A</sup>	Message	Specification
	<b>Radar blocked</b> See manual	Distance Warning temporarily disengaged. The radar sensor is blocked and cannot detect other vehicles, e.g. in the event of heavy rain or if slush has collected in front of the radar sensor. Read about the limitations of the radar sensor, see page 157.
	<b>Collision warn. Service required</b>	Distance Warning and Collision Warning with Auto Brake fully or partially disengaged. Visit a workshop if the message remains - an authorised Volvo workshop is recommended.

<sup>A</sup> The symbols are schematic.

04

\* Option/accessory, for more information, see Introduction.



### City Safety™

#### General

City Safety™ is a function for helping the driver to avoid a collision when driving in queues, amongst other things, when changes in the traffic ahead, combined with a lapse in attention, could lead to an incident.

The function is active at speeds under 50 km/h and it helps the driver by automatically braking the car in the event of imminent risk of collision with vehicles in front, should the driver not react in time by braking and/or steering away.

City Safety™ is activated in situations where the driver should have started braking earlier, which is why it cannot help the driver in every situation.

City Safety™ is designed to be activated as late as possible in order to avoid unnecessary intervention.

City Safety™ must not be used as an excuse for the driver to change his/her driving style. If the driver solely relies on City Safety™ to do the braking, there will be a collision sooner or later.

The driver or passengers normally only notice City Safety™ if a situation arises where the car is extremely close to being in a collision.

If the car is also equipped with a Collision Warning function with Auto Brake\*, these two systems complement each other. For more information on Collision Warning function with Auto Brake, see page 170.

#### **IMPORTANT**

Maintenance and replacement of City Safety™ components must only be performed by a workshop - an authorised Volvo workshop is recommended.

#### **WARNING**

City Safety™ does not engage in all driving situations or traffic, weather or road conditions.

City Safety™ does not react to vehicles driving in a different direction from the car, to small vehicles and motorcycles or to people and animals.


City Safety™ can prevent collision at a speed difference of less than 15 km/h - at a higher speed difference, it is only possible to reduce collision speed. In order to obtain full brake function, the driver must depress the brake pedal.

Never wait for City Safety™ to engage. The driver always bears responsibility for maintaining the proper distance and speed.



City Safety™

Function

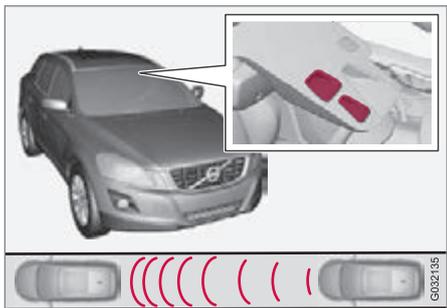

Laser sensor transmitter and receiver window<sup>1</sup>.

City Safety™ detects the traffic in front of the car with a laser sensor fitted in the top edge of the windscreen. If there is an imminent risk of collision, City Safety™ will automatically brake the car, which may be experienced as sudden braking.

If the speed difference is 4-15 km/h in relation to the vehicle in front then City Safety™ can completely prevent a collision.

City Safety™ activates a short, sharp braking and stops the car in normal circumstances, just behind the vehicle in front. For most drivers this is well outside normal driving style

and may be experienced as being uncomfortable.

If the difference in speed between the vehicles is greater than 15 km/h then City Safety™ may not prevent the collision on its own. To obtain full brake force, the driver must depress the brake pedal. This could then make it possible to prevent a collision, even at speed differences above 15 km/h.

When the function is activated and brakes, the combined instrument panel shows a message to the effect that the function is/has been active.

**i NOTE**  
When City Safety™ brakes, the brake lights come on.

Operation

**i NOTE**  
The City Safety™ function is always enabled after the engine has been started via key position I and II (see page 81 on key positions).

On and Off

In certain situations, it may be advisable to disable City Safety™, e.g. where leafy branches could sweep over the bonnet and/or windscreen.

After starting the engine City Safety™ can be deactivated as follows:

- Using **MY CAR** on the centre console's screen with its menu system, search and locate **Settings → Car settings → Driver support systems → City Safety**. Select the **Off** option. For more information on the menu system **MY CAR**, see page 207.

However, the function will be enabled the next time the engine is started, regardless of whether the system was enabled or disabled when the engine was switched off.

**! WARNING**  
The laser sensor emits laser light even when City Safety™ is disabled manually.

To enable City Safety™ again:

- Follow the same procedure as for disabling, but select the **On** option.

<sup>1</sup> NOTE: The illustration is schematic - details may vary depending on car model.



### City Safety™

#### Limitations

The sensor in City Safety™ is designed to detect cars and other large vehicles in front of the car irrespective of whether it is day or night.

However, the sensor has limitations and has poorer functionality - or none at all - in e.g. heavy snowfall or rain, dense fog, dust storms or white-out situations. Mist, dirt, ice or snow on the windscreen may disrupt the function.

Low-hanging objects, e.g. a flag/pennant for projecting load, or accessories such as auxiliary lamps and bull bars that are higher than the bonnet limit the function.

The laser light from the sensor in City Safety™ measures how the light is reflected. The sensor cannot detect objects with low reflection capacity. The rear sections of the vehicle generally reflect the light sufficiently thanks to the number plate and rear light reflectors.

On slippery road surfaces the braking distance is extended, which may reduce the capacity of City Safety™ to avoid a collision. In such situations the ABS and DSTC systems will provide best possible braking force with maintained stability.

When your own car is reversing, City Safety™ is temporarily deactivated.

City Safety™ is not activated at low speeds - under 4 km/h, which is why the system does not intervene in situations where a vehicle in front is being approached very slowly, e.g. when parking.

Driver commands are always prioritised, which is why City Safety™ does not intervene in situations where the driver is steering or accelerating in a clear manner, even if a collision is unavoidable.

When City Safety™ has prevented a collision with a stationary object the car remains stationary for a maximum of 1.5 seconds. If the car is braked for a vehicle in front that is moving, then speed is reduced to the same speed as that maintained by the vehicle in front.

On a car with manual gearbox the engine stops when City Safety™ has stopped the car, unless the driver manages to depress the clutch pedal beforehand.



#### NOTE

- Keep the windscreen surface in front of the laser sensor free from ice, snow and dirt (see the illustration for sensor location, page 165).
- Do not affix or mount anything on the windscreen in front of the laser sensor
- Remove ice and snow from the bonnet - snow and ice must not exceed a height of 5 cm.

#### Fault tracing and action

If the combined instrument panel shows the message **Windscreen sensors blocked** See manual then it indicates that the laser sensor is blocked and cannot detect vehicles in front of the car. This means that City Safety™ is not operational.

However, the message **Windscreen sensors blocked** See manual is not shown for all situations in which the laser sensor is blocked. The driver must therefore be diligent about keeping the windscreen and area in front of the laser sensor clean.

The following table presents possible causes for the message being shown, along with suggestions for appropriate action.



Cause	Action
The windscreen surface in front of the laser sensor is dirty or covered with ice or snow.	Clean the windscreen surface in front of the sensor from dirt, ice and snow.
The laser sensor field of vision is blocked.	Remove the blocking object.

**! IMPORTANT**

If there are cracks, scratches or stone chips in the windscreen in front of either of the laser sensor's "windows" and they cover a surface of approx. 0.5 x 3.0 mm (or larger), then a workshop must be contacted for replacement of the windscreen (see the illustration for sensor location, page 165) - an authorised Volvo workshop is recommended.

Failure to take action may result in reduced performance for City Safety™.


To avoid the risk of failed, deficient or reduced operation for City Safety™, the following also applies:

- Volvo recommends that you do **not** repair cracks, scratches or stone chips in the area in front of the laser sensor - instead, the whole windscreen should be replaced.
- Before replacing a windscreen, contact an authorised Volvo workshop to verify that the correct windscreen is ordered and fitted.
- The same type or Volvo-approved windscreen wipers must be fitted during replacement.

**Laser sensor**

The City Safety™ function includes a sensor which transmits laser light. Contact a qualified workshop in the event of a fault or if the laser sensor needs servicing - an authorised Volvo workshop is recommended. It is absolutely essential to follow the prescribed instructions when handling the laser sensor.

The following two labels are affixed directly on the laser sensor unit:

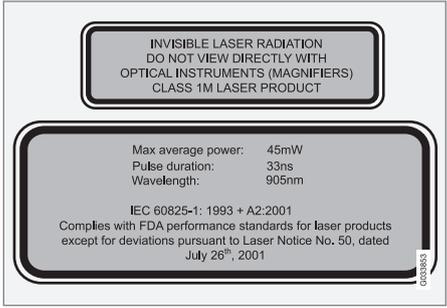

The upper label in the figure describes the laser beam's classification:

- Laser radiation - Do not look into the laser beam with optical instruments - Class 1M laser product.

The lower label in the figure describes the physical data of the laser beam:



## City Safety™

- IEC 60825-1:1993 + A2:2001. Complies with FDA (U.S. Food Administration) standards for laser product design with the exception of deviations in accordance with "Laser Notice No. 50" from 26 July 2001.

### Radiation data for the laser sensor

The following table specifies the laser sensor's physical data.

Maximum pulse energy	2.64 µJ
Maximum average output	45 mW
Pulse duration	33 ns
Divergence (horizontal x vertical)	28° × 12°

### WARNING

If any of these instructions are not followed then there is a risk of eye injury!

- Never look into the laser sensor (which emits spreading invisible laser radiation) at a distance of 100 mm or closer with magnifying optics such as a magnifying glass, microscope, lens or similar optical instruments.
- Testing, repair, removal, adjustment and/or replacement of the laser sensor's spare parts must only be carried out by a qualified workshop - we recommend an authorised Volvo workshop.
- To avoid exposure to harmful radiation, do not carry out any readjustments or maintenance other than those specified here.
- The repairer must follow specially drawn up workshop information for the laser sensor.
- Do not remove the laser sensor (this includes removing the lenses). A removed laser sensor does not fulfil

laser class 3B as per standard IEC 60825-1. Laser class 3B is not eye-safe and therefore entails a risk of injury.

- The laser sensor's connector must be unplugged before removal from the windscreen.
- The laser sensor must be fitted onto the windscreen before the sensor's connector is plugged in.
- The laser sensor transmits laser light when the remote control key is in position II and also with the engine switched off (see page 81 on key positions).

### Symbols and text messages

In conjunction with automatic braking by the City Safety™ system, one or more symbols may illuminate in the combined instrument panel and a text message may be shown.

A text message can be acknowledged by briefly pressing the **OK** button on the direction indicator stalk.



## City Safety™

Symbol <sup>A</sup>	Message	Meaning/Action
	<b>Auto braking by City Safety</b>	City Safety™ is braking or has automatically braked.
	<b>Windscreen sensors blocked</b> See manual	The laser sensor is temporarily non-operational because something is blocking it. <ul style="list-style-type: none"> <li>Remove the object blocking the sensor and/or clean the windscreen in front of the sensor. Read about the limitations of the laser sensor, see page 166.</li> </ul>
	<b>City Safety Service required</b>	City Safety™ is not operational. <ul style="list-style-type: none"> <li>Visit a workshop if the message remains - an authorised Volvo workshop is recommended.</li> </ul>

<sup>A</sup> The symbols are schematic.



## Collision Warning with Auto Brake & Pedestrian Detection\*

### General

"Collision Warning with Auto Brake & Pedestrian Detection" is an aid to assist the driver when there is a risk of colliding with a pedestrian or vehicle in front that is stationary or moving in the same direction.

Collision Warning with Auto Brake & Pedestrian Detection is activated in situations where the driver should have started braking earlier, which is why it cannot help the driver in every situation.

Collision Warning with Auto Brake & Pedestrian Detection is designed to be activated as late as possible in order to avoid unnecessary intervention.

Collision Warning with Auto Brake & Pedestrian Detection may prevent a collision or reduce the collision speed.

Collision Warning with Auto Brake & Pedestrian Detection must not be used as an excuse for the driver to change his/her driving style. If the driver solely relies on Collision Warning with Auto Brake to do the braking, there will be a collision sooner or later.

### Two system levels

Depending on how the car equipped, the Collision Warning with Auto Brake & Pedestrian Protection function may appear in two variants: **Level 1** and **Level 2**.

#### Level 1

The driver is merely warned of occurring obstacles by means of visual and acoustic signals - no automatic braking intervenes, the driver must himself brake.


#### Level 2

The driver is warned of occurring obstacles by means of visual and acoustic signals - the car is braked automatically if the driver himself does not act within a reasonable time.

### ! IMPORTANT

Maintenance of components included in Collision Warning with Auto Brake & Pedestrian Detection must only be carried out in a workshop - an authorised Volvo workshop is recommended.

### Function

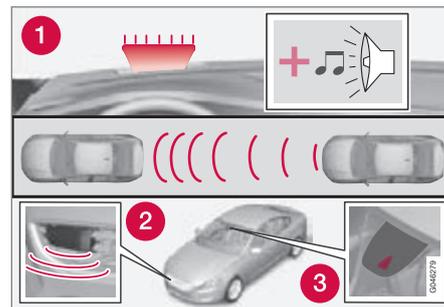

Function overview<sup>1</sup>.

- 1 Audio-visual warning signal in the event of a collision risk.
- 2 Radar sensor<sup>2</sup>
- 3 Camera sensor

Collision Warning with Auto Brake executes three steps in the following order:

1. **Collision warning**
2. **Brake support<sup>2</sup>**
3. **Auto Brake<sup>2</sup>**

<sup>1</sup> NOTE: The illustration is schematic - details may vary depending on car model.

<sup>2</sup> With system Level 2 only.



## Collision Warning with Auto Brake & Pedestrian Detection\*

The collision warning system and City Safety™ complement each other. For more information on City Safety™, see page 164.

### 1 - Collision warning

The driver is first warned of a potentially imminent collision.

The collision warning system detects pedestrians, stationary vehicles as well as vehicles driving in the same direction in front of the car.

If there is a risk of collision with a pedestrian or a vehicle, the driver's attention is attracted with a flashing red warning signal (no. [1] in the illustration on page 170) and an acoustic signal

### 2 - Brake support<sup>2</sup>

If the risk of collision has increased further after the collision warning then the brake support is activated.

This means that the brake system is prepared for fast braking by applying the brakes gently, which may be experienced as a slight jerk.

If the brake pedal is depressed sufficiently quickly then full brake function is implemented.

Brake support also reinforces the driver's braking if the system considers that the braking is not sufficient to avoid a collision.

### 3 - Auto Brake<sup>2</sup>

The automatic brake function is activated last.

If in this situation the driver has not yet started to take evasive action and the risk of collision is imminent then the automatic braking function is deployed - this takes place irrespective of whether or not the driver brakes. Braking then takes place with full brake force in order to reduce collision speed, or with limited brake force if it is sufficient to avoid a collision.

**⚠ WARNING**

The collision warning system does not engage in all driving situations or traffic, weather or road conditions. The collision warning system does not react to vehicles driving in another direction to the car or to animals.

Warning only activated in the event of a high risk for collision. This section "Function" and the section "Limitations" inform about limitations that the driver must be aware of before using the Collision Warning system with Auto Brake.

Warnings and brake interventions for pedestrians are switched off at vehicle speeds exceeding 80 km/h.

Warnings and brake interventions for pedestrians do not work in darkness and tunnels - not even when streetlights are lit.

The auto-brake function can prevent a collision or reduce collision speed. To ensure full brake performance, the driver should always depress the brake pedal - even when the car auto-brakes.


Never wait for a collision warning. The driver is always responsible that the correct distance and speed are maintained - even when the collision warning system with auto-brake is used.

<sup>2</sup> With system Level 2 only.



## Collision Warning with Auto Brake & Pedestrian Detection\*

### Detection of pedestrians

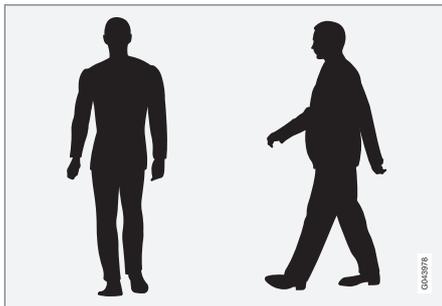

Optimal examples of what the system regards as pedestrians with clear body contours.

Optimal performance of the system requires that the system function that detects pedestrians receives as unambiguous information as possible about the contours of the body - this implies the opportunity to identify the head, arms, shoulders, legs, upper and lower body combined with a normal human pattern of movement.

If large parts of the body are not visible to the camera then the system cannot detect a pedestrian.

- In order for a pedestrian to be detected he/she must appear full-length and have a height of at least 80 cm.
- The system cannot detect a pedestrian carrying larger items.
- The camera sensor's ability to see pedestrians at dusk and dawn is limited - just like the human eye.
- The camera sensor's capacity to detect pedestrians is deactivated when driving in darkness and tunnels - even when streetlights are lit.



### WARNING

Collision Warning with Auto Brake & Pedestrian Detection is an assistance tool.

This function cannot detect all pedestrians in all situations and it cannot see e.g. partially obscured pedestrians, people in clothing that hides the contours of the body or pedestrians shorter than 80 cm.

- The driver is always responsible that the vehicle is driven properly and with a safety distance adapted to the speed.

### Operation

Settings are made from **MY CAR** via the centre console's screen and menu system. For information on how the menu system is used, see page 207.

### Warning signals On and Off

You can select whether the collision warning system's acoustic and visual warning signals should be switched on or off.

When starting the engine, the setting that was selected when the engine was switched off is obtained automatically.



### NOTE

The Brake Support and Auto Brake functions are always activated - they cannot be deactivated.

### Light and acoustic signals

To deactivate the light and acoustic signals:

- Locate **Settings** → **Car settings** → **Driver support systems** → **Collision Warning** - there select to uncheck the box.

The warning lamp (no. [1] in the figure page 170) is tested every time the engine is started by briefly illuminating the warning lamp's separate points of light if the collision warning



## Collision Warning with Auto Brake & Pedestrian Detection\*

system's light and acoustic warnings are activated.

### Acoustic signal

The warning sound can be activated/deactivated separately:

- Select **On** or **Off** in the menu system under **Settings → Car settings → Driver support systems → Collision Warning → Warning sound**.

### Set warning distance

The warning distance regulates the distance at which the visual and acoustic warnings are deployed.

- Select **Long**, **Normal** or **Short** in the menu system **MY CAR** under **Settings → Car settings → Driver support systems → Collision Warning → Warning distance**

The warning distance determines the system's sensitivity. Warning distance **Long** provides an earlier warning. First test with **Long** and if this setting produces too many warnings, which could be perceived as irritating in certain situations, then change to warning distance **Normal**.

Only use warning distance **Short** in exceptional cases, e.g. for dynamic driving.

### NOTE

When the adaptive cruise control is in use the warning lamp and warning sound will be used by the cruise control even if the collision warning system is switched off.

The collision warning system warns the driver in the event of a risk of a collision, but the function cannot shorten driver reaction time.

In order for the collision warning system to be effective, always drive with the Distance Alert set at time interval 4–5, see page 161.

### NOTE

Even if the warning distance has been set to **Long** warnings could be perceived as being late in certain situations, e.g. when there are large differences in speed or if vehicles in front brake heavily.


### WARNING

No automatic system can guarantee 100 % correct function in all situations. Therefore, never test Collision Warning with Auto Brake by driving at people or vehicles - this may cause severe damage and injury and risk lives.

### Checking settings

The settings required can be controlled on the centre console's screen. Search with the menu system **MY CAR** under **Settings → Car settings → Driver support systems → Collision Warning**, see page 207.

### Maintenance

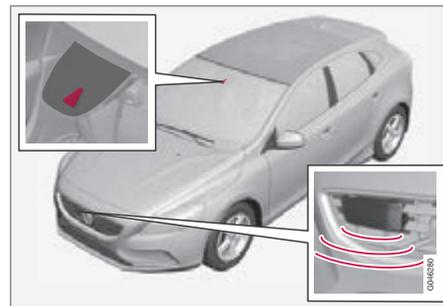

Camera and radar sensor.

For the sensors to work correctly, they must be kept clear of dirt, ice and snow, and be cleaned regularly with water and car shampoo.

### NOTE

Dirt, ice and snow covering the sensors will reduce their function and may prevent measurement.

\* Option/accessory, for more information, see Introduction.



### Collision Warning with Auto Brake & Pedestrian Detection\*

#### Limitations

Collision Warning with Auto Brake and Pedestrian Detection is active from approx. 4 km/h.

The visual warning signal (no. [1] in the illustration on page 170) may be difficult to notice in the event of strong sunlight, reflections, when sunglasses are being worn or if the driver is not looking straight ahead. The warning sound should therefore always be activated.

On slippery road surfaces the braking distance is extended, which may reduce the capacity to avoid a collision. In such situations the ABS and DSTC systems will provide best possible braking force with maintained stability.



#### NOTE

The visual warning signal can be temporarily disengaged in the event of high passenger compartment temperature caused by strong sunlight for example. If this occurs then the warning sound is activated even if it is deactivated in the menu system.

- Warnings may not appear if the distance to the vehicle in front is small or if steering wheel and pedal movements are large, e.g. a very active driving style.



#### WARNING

Warnings and brake interventions could be implemented late or not at all if the traffic situation or external influences mean that the radar or camera sensor cannot detect a pedestrian or a vehicle in front correctly.

The sensor system has a limited range for pedestrians and the system therefore provides effective warnings and brake interventions at vehicle speeds up to 50 km/h. For stationary or slow-moving vehicles, warnings and brake interventions are effective at vehicle speeds up to 70 km/h.

Warnings for stationary or slow-moving vehicles could be disengaged due to darkness or poor visibility.

Warnings and brake interventions for pedestrians are switched off at vehicle speeds exceeding 80 km/h.

The collision warning system uses the same radar sensors as adaptive cruise control. For more information on the radar sensor and its limitations, see page 157.

If warnings are perceived as being too frequent or disturbing then the warning distance can be reduced. This then leads to the system providing a warning at a later stage, which reduces the total number of warnings; see the section "Set warning distance" on page 173.



## Collision Warning with Auto Brake & Pedestrian Detection\*

Collision Warning with Auto Brake is temporarily deactivated with reverse gear engaged.

Collision Warning with Auto Brake is not activated at low speeds - under 4 km/h, which is why the system does not intervene in situations where the car is approaching a vehicle in front very slowly, e.g. when parking.

In situations where the driver demonstrates active, aware driving behaviour, a collision warning may be postponed slightly in order to keep unnecessary warnings to a minimum.

When Auto Brake has prevented a collision with a stationary object the car remains stationary for a maximum of 1.5 seconds. If the car is braked for a vehicle in front that is moving, then speed is reduced to the same speed as that maintained by the vehicle in front.

On a car with manual gearbox the engine stops when Auto Brake has stopped the car, unless the driver manages to depress the clutch pedal beforehand.

### Camera sensor limitations

The car's camera sensor is also used - as well as by Collision Warning with Auto Brake - by the functions:

- Automatic main/dipped beam dimming - see page 92
- Road sign information - see page 143.

- Driver Alert Control – see page 179
- Lane keeping assistant - see page 182



### NOTE

Keep the windscreen surface in front of the camera sensor free from ice, snow, mist and dirt.

Do not stick or attach anything to the windscreen in front of the camera sensor as this may reduce effectiveness or cause one or more of the systems dependent on the camera to stop working.

The camera sensors have limitations similar to the human eye, i.e. they "see" worse in darkness, heavy snowfall or rain and in thick fog for example. Under such conditions the functions of camera-dependent systems could be significantly reduced or temporarily disengaged.

Strong oncoming light, reflections in the carriageway, snow or ice on the road surface, dirty road surfaces or unclear lane markings could also significantly reduce camera sensor function when it is used to scan the carriageway and detect pedestrians and other vehicles.

The field of vision of the camera sensor is limited, which is why pedestrians and vehicles

cannot be detected in some situations, or they are detected later than anticipated.

During very high temperatures the camera is temporarily switched off for about 15 minutes after the engine is started in order to protect camera functionality.

### Fault tracing and action

If the combined instrument panel shows the message **Windscreen Sensors blocked** then this means that the camera sensor is blocked and cannot detect pedestrians, vehicles or road markings in front of the car.

At the same time, this means that - besides Collision Warning with Auto Brake - the Automatic main/dipped beam dimming, Road Sign Information, Driver Alert Control and Lane Keeping Aid functions will not have full functionality either.

The following table presents possible causes for a message being shown along with the appropriate action.

\* Option/accessory, for more information, see Introduction.



## 04 Driver support

### Collision Warning with Auto Brake & Pedestrian Detection\*

Cause	Action
The windscreen surface in front of the camera is dirty or covered with ice or snow.	Clean the windscreen surface in front of the camera from dirt, ice and snow.
Thick fog, heavy rain or snow means that the camera does not work sufficiently well.	No action. At times the camera does not work during heavy rain or snowfall.

Cause	Action
The windscreen surface in front of the camera has been cleaned but the message remains.	Wait. It may take several minutes for the camera to measure the visibility.

Cause	Action
Dirt has appeared between the inside of the windscreen and the camera.	Visit a workshop to have the windscreen inside the camera cover cleaned - an authorised Volvo workshop is recommended.

### Symbols and text messages

Symbol <sup>A</sup>	Message	Specification
	Collis'n warning OFF	Collision warning system switched off. Shown when the engine is started. The message clears after about 5 seconds or after one press of the <b>OK</b> button.
	Collision warn. Unavailable	The collision warning system cannot be activated. Shown when the driver attempts to activate the function. The message clears after about 5 seconds or after one press of the <b>OK</b> button.
	Auto braking was activated	Auto Brake has been active. The message clears after one press of the <b>OK</b> button.



**Collision Warning with Auto Brake & Pedestrian Detection\***

Symbol <sup>A</sup>	Message	Specification
	<b>Windscreen sensors blocked See manual</b>	<p>The camera sensor is temporarily disengaged.</p> <p>Shown in the event of snow, ice or dirt on the windscreen for example.</p> <ul style="list-style-type: none"> <li>Clean the windscreen surface in front of the camera sensor.</li> </ul> <p>Read about the limitations of the camera sensor, see page 175.</p>
	<b>Radar blocked See manual</b>	<p>Collision Warning with Auto Brake is temporarily disengaged.</p> <p>The radar sensor is blocked and cannot detect other vehicles. For example, in the event of heavy rain or if slush has collected in front of the radar sensor.</p> <p>Read about the limitations of the radar sensor, see page 157.</p>
	<b>Collision warn. Service required</b>	<p>Collision Warning with Auto Brake is fully or partially disengaged.</p> <ul style="list-style-type: none"> <li>Visit a workshop if the message remains - an authorised Volvo workshop is recommended.</li> </ul>

<sup>A</sup> Symbols are schematic - may vary by market and car model.

04

\* Option/accessory, for more information, see Introduction.



### Driver Alert System\*

#### General information on Driver Alert System

The Driver Alert System is intended to assist drivers whose driving ability is deteriorating or who are inadvertently leaving the lane they are driving on.

The Driver Alert System consists of different functions which can either be switched on at the same time or individually:

- Driver Alert Control – DAC, see page 179.
- Lane Keeping Aid - LKA, see page 182.

A switched-on function is set in standby mode and is not activated automatically until speed exceeds 65 km/h.

The function is deactivated again when speed decreases to below 60 km/h.

The functions use a camera which is dependent on the lane having side markings painted on each side.



#### WARNING

Driver Alert System does not work in all situations but is designed merely as a supplementary aid.

The driver always bears ultimate responsibility for ensuring that the vehicle is driven safely.

#### Driver aid status




The current status for all driver aids can be checked in **MY CAR**, see page 209.



## Driver Alert System - DAC\*

## General information on DAC

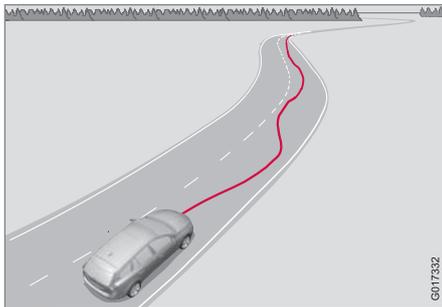

The DAC (Driver Alert Control) function is intended to attract the driver's attention when he/she starts to drive less consistently, e.g. if he/she becomes distracted or starts to fall asleep.

A camera detects the side markings painted on the carriageway and compares the section of the road with the driver's steering wheel movements. The driver is alerted if the vehicle does not follow the carriageway evenly.

**i** NOTE

The camera sensor has certain limitations - see page 175.

The objective for DAC is to detect slowly deteriorating driving ability and it is primarily intended for major roads. The function is not intended for city traffic.

In some cases driving ability is not affected despite driver fatigue. In which case there may not be any warning issued for the driver. For this reason it is always important to stop and take a break in the event of any signs of driver fatigue, irrespective of whether or not DAC issues a warning.

**i** NOTE

The function must not be used to extend a period of driving. Always plan breaks at regular intervals, and make sure you are well rested.

**Limitation**

In some cases the system may issue a warning despite driving ability not deteriorating, for example:

- in strong side winds.
- on rutted road surfaces.

**Operation**

Settings are made from the centre console's screen and its menu system. For information on how the menu system is used, see page 207.

**On/Off**

To set Driver Alert in standby mode:

- In **MY CAR**, search for **Car settings** → **Driver support systems** → **Driver Alert** and check the box - No check in the box: Function disengaged.

**Function**

Driver Alert is activated when speed exceeds 65 km/h and remains active as long as the speed is over 60 km/h.



### Driver Alert System - DAC\*



If the vehicle is being driven erratically, the driver is notified with an audible signal plus the text message **Driver Alert Time for a break** - the linked symbol is illuminated in the combined instrument panel at the same time. The warning is repeated after a time if driving ability does not improve.

The warning symbol can go off:

- Press the left stalk switch **OK** button.



#### **WARNING**

An alarm should be taken very seriously, as a sleepy driver is often not aware of his/her own condition.

In the event of an alarm or a feeling of tiredness; stop the car in a safe manner as soon as possible and rest.

Studies have shown that it is equally as dangerous to drive while tired as it is under the influence of alcohol.



## Driver Alert System - DAC\*

## Symbols and messages

## Combined instrument panel

Symbol <sup>A</sup>	Message	Specification
	Driver Alert Time for a break	The vehicle has been driven inconsistently - the driver is alerted by an acoustic warning signal + text.
	Windscreen sensors blocked See manual	The camera sensor is temporarily disengaged. Shown in the event of snow, ice or dirt on the windscreen for example. <ul style="list-style-type: none"> <li>Clean the windscreen surface in front of the camera sensor.</li> </ul> Read about the limitations of the camera sensor, see page 175.
	Driver Alert system Service required	The system is disengaged. <ul style="list-style-type: none"> <li>Visit a workshop if the message remains - an authorised Volvo workshop is recommended.</li> </ul>

<sup>A</sup> The symbols are schematic.


## Screen

Sym- bol	Message	Specification
	Driver Alert OFF	The function is disengaged.
	Driver Alert Available	The function is activated.
	Driver Alert Standby <65 km/h	The function is set in standby mode due to speed being lower than 65 km/h.
	Driver Alert Unavailable	The carriageway does not have clear side markings or the camera sensor is temporarily disengaged. Read about the limitations of the camera sensor, see page 175.



## Driver Alert System - Lane Keeping Aid\*

### General information on the Lane Keeping Aid

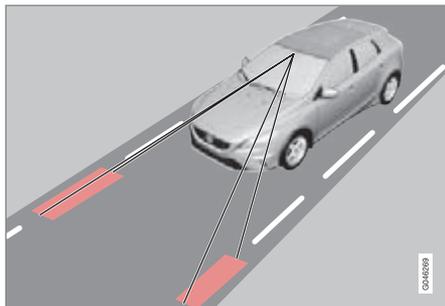

The Lane Keeping Aid function (Lane Keeping Aid) is intended for use on motorways and similar major roads to reduce the risk of the vehicle accidentally leaving its own lane in certain situations.

A camera reads the painted side lines of the road/lane. If the car is about to cross a side line, the Lane Keeping Aid actively steers the car back into the lane with slight steering torque in the steering wheel.

If the car reaches or passes a side line, the Lane Keeping Aid warns the driver with pulsing vibrations in the steering wheel.

### WARNING

LKA is merely a driver's aid and does not engage in all driving situations or traffic, weather or road conditions.

The driver always bears ultimate responsibility for ensuring that the vehicle is driven safely and that applicable laws and road traffic regulations are followed.

### Function

The Lane Keeping Aid is active within the speed interval 65-200 km/h on roads with clearly visible side lines. The function is temporarily deactivated on narrow roads with less than 2.6 metres between the lane side lines.



### Off & On

Press the button in the centre console to activate or deactivate the function. The function is switched on if one lamp is illuminated in the button.

Some combinations of the selected equipment leave no vacant space for an On/Off button in the centre console - in which case the function is handled instead by the car's menu system **MY CAR**. Here, proceed as follows:

- Select **On** or **Off** under **Settings** → **Car settings** → **Lane Keeping Aid**.

For a description of the menu system - see page 207.

In addition, the following selections can be made in **MY CAR**:


- Warning with vibration in the steering wheel: **Vibration only - On** or **Off**.
- Active steering: **Steering assist only - On** or **Off**.
- Both Warning with vibration in the steering wheel and Active steering: **Full function - On** or **Off**.

### Active steering

The Lane Keeping Aid strives to keep the car within the side lines for the lane.




## Driver Alert System - Lane Keeping Aid\*

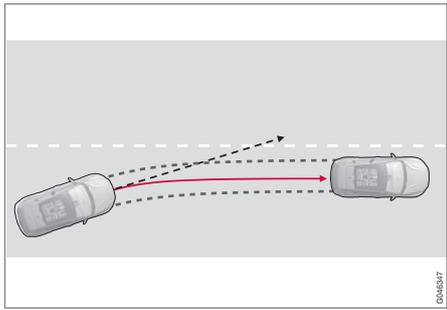

*LKA intervenes and steers away.*

If the vehicle approaches the left or right side line of the lane and the direction indicator is not activated, the car is steered back into the lane.


### Warning with vibration in the steering wheel

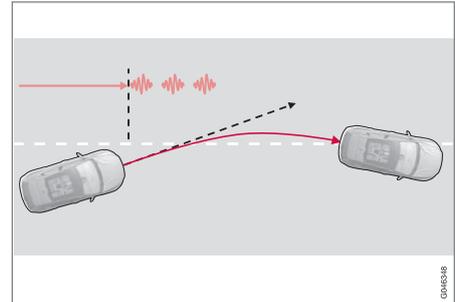

*LKA steers and warns with pulsing steering wheel vibrations<sup>1</sup>.*

If the vehicle passes a side line, the Lane Keeping Aid warns the driver with pulsing vibrations in the steering wheel. This occurs regardless of whether the car is actively steered back by applying a slight steering torque.

### Dynamic cornering

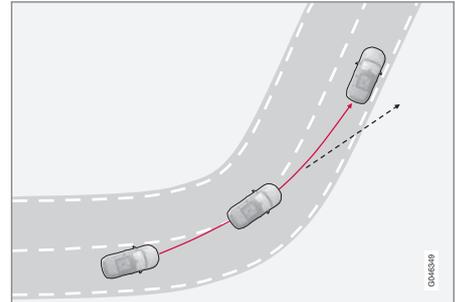

*LKA does not engage in sharp inside curves.*

In certain cases, the Lane Keeping Aid allows the car to cross side lines without engaging active steering or warning with pulsing vibrations in the steering wheel. Using an adjacent lane for dynamic cornering when there is a clear line of vision is an example of one such case.

<sup>1</sup> The figure shows 3 pulsing vibrations when the side line is passed.




## Driver Alert System - Lane Keeping Aid\*

### Operation

The function is supplemented with self-explanatory graphics in different situations. Here are some examples:

#### NOTE


LKA is temporarily deactivated for as long as the direction indicator is switched on.

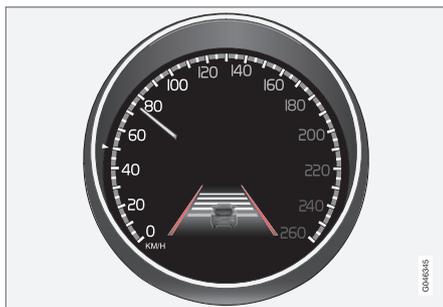

LKA "sees" and follows the side lines (marked in red in the figure).

If the Lane Keeping Aid is active and detects/"sees" the side lines, the LKA symbol is shown with WHITE lines.

- GREY side line – the Lane Keeping Aid does not see a line on that side of the car.

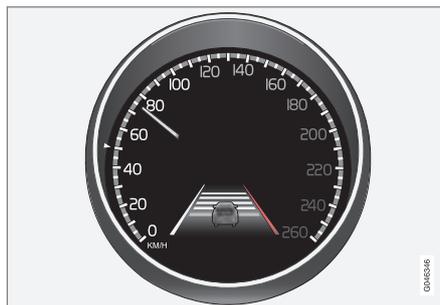

LKA intervenes on the right-hand side (marked in red in the figure).

The Lane Keeping Aid intervenes and steers away from the side line - this is indicated with:

- RED line for the side in question.

### Limitations

- The Lane Keeping Aid camera sensor is restricted in a similar way to the human eye. For more information, see page 175.

#### NOTE

In certain demanding situations LKA may find it difficult to assist the driver correctly - in which case it is recommended that LKA is switched off.

Examples of such a situation could be:

- roadworks
- winter road conditions
- poor road surface
- very sporty driving style
- poor weather with reduced visibility.

### Hands on the steering wheel

In order for Lane Keeping Aid to operate, the driver must have his/her hands on the steering wheel. LKA continually monitors this. If hands are not detected on the steering wheel, a text message encouraging the driver to actively steer the car is shown.

If the driver does not follow the request to begin steering, the Lane Keeping Aid goes into standby mode and will remain in this mode until the driver begins to steer the car again.

### Symbols and text messages

In situations where the LKA function fails or is interrupted, the combined instrument panel

**Driver Alert System - Lane Keeping Aid\***

may show a symbol, along with an explanatory message. If so, follow the recommendation given.

Message examples:

Symbol <sup>A</sup>	Message	Specification
	<b>Lane Keeping Aid Unavailable at this speed</b>	The Lane Keeping Aid is set to standby mode because the speed is lower than 65 km/h.
	<b>Lane Keeping Aid Unavailable for current markings</b>	The lane does not have clear side lines or the camera sensor is temporarily disengaged. Read about the limitations of the camera sensor, see page 175.
	<b>Lane Keeping Aid Available</b>	The function scans the lane's side lines.
	<b>Windscreen sensors blocked</b> See manual	The camera sensor is temporarily disengaged. Shown in the event of snow, ice or dirt on the windscreen for example. <ul style="list-style-type: none"> <li>• Clean the windscreen surface in front of the camera sensor.</li> </ul> Read about the limitations of the camera sensor, see page 175.
	<b>Lane Keeping Aid Service required</b>	The system is disengaged. <ul style="list-style-type: none"> <li>• Visit a workshop if the message remains - an authorised Volvo workshop is recommended.</li> </ul>
	<b>Lane Keeping Aid Interrupted</b>	LKA has been set to standby mode. The lines of the LKA symbol indicate when the function is active again.

<sup>A</sup> The table symbols are schematic. The symbols shown in the combined instrument panel may have a slightly different appearance.



## Park assist syst\*

### General

Parking assistance is used as an aid to parking. An acoustic signal as well as symbols on the centre console's screen indicate the distance to the detected obstacle.

Parking assistance sound level can be adjusted during the ongoing acoustic signal using the centre console's **VOL** knob or in the car's menu system **MY CAR** - see page 207.

Parking assistance is available in two variants:

- Rear only
- Both front and rear.

### NOTE

When a towbar is configured with the car's electrical system, the protrusion of the towbar is included when the function measures the parking space.

### WARNING

- Parking assistance does not relinquish the driver's own responsibility during parking.
- The sensors have blind spots where obstacles cannot be detected.
- Be aware of e.g. people and animals near the car.


### Function



*On/Off for the sensors for parking assistance and CTA<sup>1</sup>.*

The system is automatically activated when the engine is started - the switch's On/Off lamp is illuminated. If parking assistance is

switched off with the button, the lamp goes out.

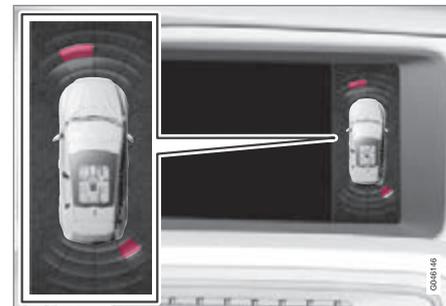

*Screen view - showing an obstacle left front and right rear.*

The centre console's screen shows an overview of the relationship between the car and detected obstacle.

Marked sectors show which of the four sensor(s) detected an obstacle. The closer to the car symbol a selected sector box is, the shorter the distance between the car and a detected obstacle.

The frequency of the signal increases the shorter the distance to an obstacle, in front of or behind the car. Other sound from the audio system is muted automatically.

<sup>1</sup> Side warning, see page 201

**Park assist syst\***


When the distance is within 30 cm the tone is constant and the active sensor's field nearest the car is filled in. If the detected obstacle is within the distance for the constant tone both behind and in front of the car, then the tone sounds alternately from the loudspeakers.

**! IMPORTANT**

Objects e.g. chains, thin glossy poles or low barriers may be in the "signal shadow" and are then temporarily not detected by the sensors - the pulsating tone may then unexpectedly stop instead of changing over to the expected constant tone.

The sensors cannot detect high objects, such as projecting loading docks.

- In such situations, pay extra attention and manoeuvre/reposition the car particularly slowly or stop the current parking manoeuvre - there may be a high risk of damage to vehicles or other objects since the sensors are temporarily unable to function optimally.

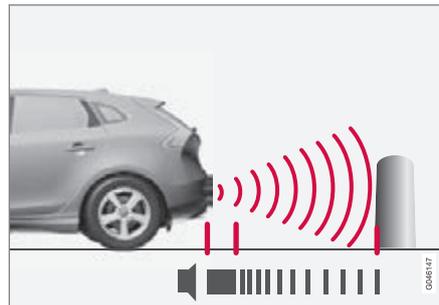**Rear parking assistance**


The distance covered to the rear of the car is about 1.5 metres. The acoustic signal for obstacles behind comes from one of the rear loudspeakers.

Rear parking assistance is activated when reverse gear is engaged.

When reversing with e.g. a trailer on the towbar, rear parking assistance is switched off automatically - otherwise the sensors would react to the trailer.

**i NOTE**

When reversing with e.g. a trailer or bike carrier on the towbar - without Volvo genuine trailer wiring - parking assistance may need to be switched off manually in order that the sensors do not react to them.

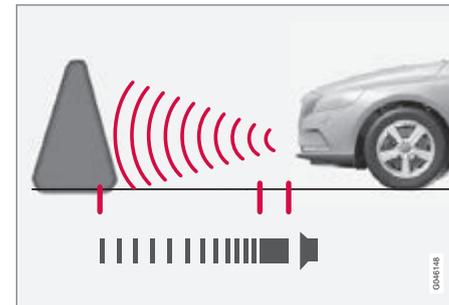**Front parking assistance**

The distance covered in front of the car is about 0.8 metres. The acoustic signal for obstacles in front comes from one of the front loudspeakers.

Front park assist is active up to approx. 10 km/h. The lamp in the button is illuminated in order to indicate that the system is activated. When the speed is below 10 km/h the system is reactivated.

**! IMPORTANT**

When auxiliary lamps are fitted: Remember that these must not obscure the sensors - the auxiliary lamps may then be perceived as an obstacle.



## Park assist syst\*

### Fault indicator

 If the combined instrument panel's information symbol illuminates with constant glow and the text message **Park assist syst Service required** is shown then parking assistance is disengaged.

**IMPORTANT**

Under some circumstances, the parking sensors can give false warning signals due to external sound sources which emit the same ultrasound frequencies as those with which the system works.

Examples of such sources include horns, wet tyres on asphalt, pneumatic brakes and exhaust noises from motorcycles etc.

### Cleaning the sensors



Sensor location, front.



Sensor location, rear.

The sensors must be cleaned regularly to ensure that they work properly. Clean them with water and car shampoo.

**NOTE**

Dirt, ice and snow covering the sensors will reduce their function and may prevent measurement.

04



## Park assist camera\*

### General

The parking camera is an assist system and is activated when reverse gear is engaged (can be changed in the settings menu, see page 207).

The camera image is shown on the centre console's screen.

#### **i** NOTE

When a towbar is configured with the car's electrical system, the protrusion of the towbar is included when the function measures the parking space.

#### **!** WARNING

- The parking camera is an aid and can never replace the responsibilities of the driver when reversing.
- The camera has blind spots where obstacles cannot be detected.
- Be aware of people and animals near the car.

### Function and operation



**CAM** button location.

The camera shows what is behind the car and if something appears from the sides.

The camera shows a wide area behind the car and part of the bumper and any towbar.

Objects on the screen may appear to tilt slightly - this is normal.

#### **i** NOTE

Objects on the display screen may be closer to the car than they appear to be on the screen.

If another view is active the parking camera system takes over automatically and the camera image is displayed on the screen.

When reverse gear is engaged two unbroken lines are shown graphically which illustrate where the car's rear wheels will roll with the current steering wheel angle, this facilitates tight parking, reversing into tight spaces and for hitching a trailer. The car's approximate external dimensions are illustrated by means of two dashed lines. These help lines can be switched off in the settings menu.

If the car is also equipped with parking assistance sensors\* then their information is displayed graphically as coloured fields in order to illustrate the distance to detected obstacles, see page 186.


The camera is active approx. 5 seconds after reverse gear has been disengaged or until the car's speed exceeds 10 km/h forward or 35 km/h backward.

04

\* Option/accessory, for more information, see Introduction.



## Park assist camera\*

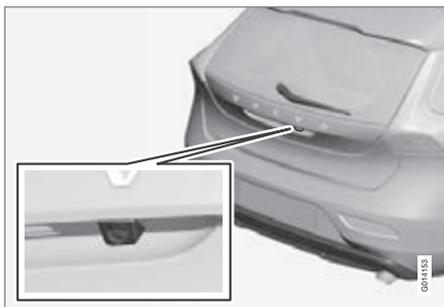

Camera location next to the opening handle.


### Light conditions

The camera image is adjusted automatically according to prevailing light conditions. Because of this, the image may vary slightly in brightness and quality. Poor light conditions can result in a slightly reduced image quality.

### NOTE

Keep the camera lens clear of dirt, snow and ice to ensure optimum function. This is particularly important in poor light.

### Park assist lines

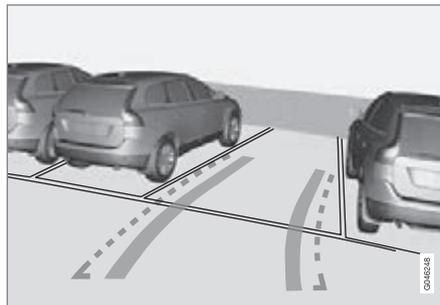

Examples of how the park assist lines can be displayed for the driver.

The lines on the screen are projected as if they were at ground level behind the car and are directly related to steering wheel movement, which shows the driver the path the car will take when it turns.

### NOTE

- When reversing with a trailer which is not connected electrically to the car, the lines on the display show the route the **car** will take - not the trailer.
- The screen shows no lines when a trailer is connected electrically to the car's electrical system.
- The parking camera is deactivated automatically when towing a trailer if a Volvo genuine trailer cable is used.


### IMPORTANT

Remember that the display only shows the area behind the car - so pay attention to the sides and front of the car when turning the steering while reversing.



Park assist camera\*

Boundary lines

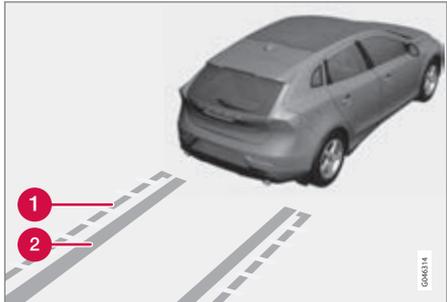


Different lines in the system.

- 1 Boundary line, free reversing zone
- 2 "Wheel tracks"

The dashed line (1) frames in a zone up to about 1.5 m back from the bumper. It is also the limit of the car's most protruding parts, such as door mirrors and corners - also during turning.

The wide "wheel tracks" (2) between the side lines indicate where the wheels will roll and can extend about 3.2 m back from the bumper if no obstacle is in the way.

Cars with reversing sensors\*

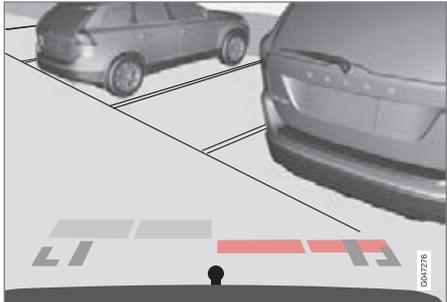

Coloured areas (x 4 - one per sensor) show distance.

If the car is also equipped with parking assistance sensors (see page 186) the distance indication will be more precise and the coloured areas show which of the 4 sensors is/are registering an obstacle.

The colour of the areas changes with decreasing distance to the obstacle - from light yellow to yellow to orange to red.

Colour / paint	Distance (metres)
Light yellow	0.7-1.5
Yellow	0,5-0,7

Colour / paint	Distance (metres)
Orange	0,3-0,5
Red	0-0.3

Settings

Press **OK/MENU** when a camera view is shown. Make the settings as desired.

Miscellaneous

- The default setting is that the camera is activated when reverse gear is engaged.
- One press on **CAM** activates the camera even if reverse gear is not engaged.
- Change between normal and zoomed image by turning **TUNE** or by pressing **CAM**.

Towbar

The camera can be used to advantage when hitching a trailer. A help line for the towbar's intended "course" towards the trailer can be shown in the display - just as for the "wheel tracks".

- The towbar can be zoomed in for precision manoeuvring with one press on **CAM**. Pressing again gives normal view.

The towbar's park assist line is activated in the menu system **MY CAR** where a selection can be made between displaying the "wheel



\* Option/accessory, for more information, see Introduction.



### Park assist camera\*

tracks" or towbar course - both options cannot be displayed simultaneously.

#### Limitations

##### NOTE

Bicycle racks or other accessories mounted on the back of the car may obscure the line of sight of the camera.

Pay attention to the possibility that, even if it only looks like a relatively small part of the image is obscured, it could be a relatively large sector that is hidden from view. Obstacles could thereby go undetected until they are very close to the car.


#### To bear in mind

- Keep the camera lens free from dirt, ice and snow.
- Clean the camera lens regularly with lukewarm water and car shampoo - take care not to scratch the lens.



## Park Assist Pilot - PAP\*

### General

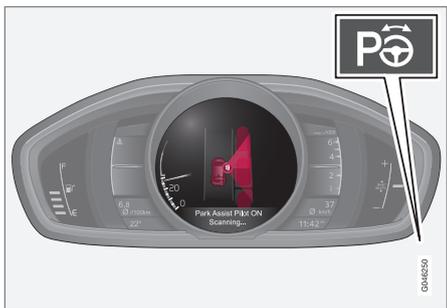

The On/Off button is on the centre console.

The Park Assist Pilot (PAP – Park Assist Pilot) helps the driver to park by first checking whether a space is sufficiently large and then turning the steering wheel and steering the car into the space. The combined instrument panel uses symbols, graphics and text to show when different operations should be performed.

### NOTE

When a towbar is configured with the car's electrical system, the protrusion of the towbar is included when the function measures the parking space.

**WARNING**

PAP does not work in all situations but is designed merely as a supplementary aid.

The driver always has the final responsibility for driving the vehicle in a safe manner and for paying attention to the surroundings and other road users approaching or passing during parking.


### Function

**NOTE**

The PAP function measures the space and turns the steering wheel - the driver's task is to follow the combined instrument panel's instructions and select the gear (reverse/forward), control the speed, brake and stop.

PAP can be activated if the following criteria are met once the engine has been started:

- The functions DSTC or ABS must not interfere while the PAP function is enabled - these can be activated due to a steep or slippery surface, for example: see pages 131 and 140 for more information.
- Trailers must not be connected to the car.
- The speed must be below 50 km/h.

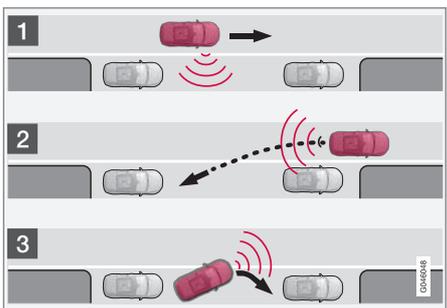

Principle for PAP.

The PAP function parks the car using the following steps:

1. The function searches for a parking space and measures it (A & B). During measurement, speed must not exceed 30 km/h.
2. The car is steered into the space while reversing (C & D).
3. The car is straightened up in the space by driving back and forth (E & F).

\* Option/accessory, for more information, see Introduction.



# 04 Driver support

## Park Assist Pilot - PAP\*


### Operation

The driver is instructed by means of simple, clear instructions in the combined instrument panel - using both graphics and text.

#### NOTE

Remember that certain steering wheel positions may obstruct the combined instrument panel's instructions when you turn it during the parking manoeuvre.

### 1 - Searching and checking measurements

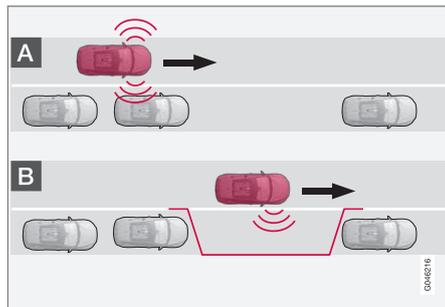

The PAP function searches for a parking space and checks whether it is big enough. Proceed as follows:



1. Activate PAP by pressing this button and do not drive faster than 30 km/h.


2. Keep an eye on the combined instrument panel and be prepared to stop the car when the graphics and text so request.
3. Stop the car when the graphics and text so request.

#### NOTE

PAP searches the area for a parking space, displays instructions and guides the car in on its passenger side. But if required the car can also be parked on the driver's side of the street:

- Activate the direction indicator for the driver's side - the car is then parked on that side of the street instead.

### 2 - Reversing in

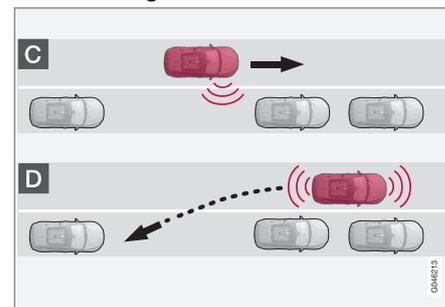


During the Reversing step, PAP will steer the car into the parking space. Proceed as follows:

1. Check that the area behind the car is clear, then engage reverse gear.
2. Reverse slowly and carefully without touching the steering wheel - and no faster than approx. 7 km/h.
3. Keep an eye on the combined instrument panel and be prepared to stop the car when the graphics and text so request.

**Park Assist Pilot - PAP\*****NOTE**

- Keep your hands away from the steering wheel when the PAP function is activated.
- Make sure that the steering wheel is not hindered in any way and can rotate freely.
- For optimum results - Wait until the steering wheel has been turned before starting to drive backwards/forwards.

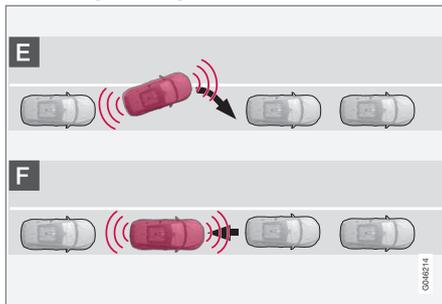**3 - Straightening up**

When the car has reversed into the parking space, it must be straightened up and stopped.

1. Engage first gear or **D** position, wait until the steering wheel has been turned, then drive slowly forwards.
2. Stop the car when the graphics and text message so request.
3. Engage reverse gear and drive backwards slowly until the graphics and text message tell you to stop.

The function is disengaged automatically when parking is complete, and the graphics and text message show that parking is complete. It may be necessary for the driver to correct the positioning. Only the driver can determine whether the car is properly parked.

**IMPORTANT**

The warning distance is shorter when the sensors are used by Active Park Assist compared with when Park Assist uses the sensors.

**Limitations**

The PAP sequence is stopped:

- if the car is driven too quickly - above 7 km/h
- if the driver touches the steering wheel
- if the ABS or DSTC function is enabled - e.g. if a wheel loses grip on a slippery road.

A text message indicates where the PAP sequence was stopped.

**NOTE**

Dirt, ice and snow covering the sensors will reduce their function and may prevent measurement.

**IMPORTANT**

Under certain circumstances, PAP is unable to find parking spaces - one reason for this may be the fact that there is interference with the sensors from external sound sources which emit the same ultrasound frequencies as those with which the system works.

Examples of such sources include horns, wet tyres on asphalt, pneumatic brakes and exhaust noises from motorcycles etc.

**To bear in mind**

The driver should bear in mind that the Park Assist Pilot is an aid - not an infallible, fully-automatic function. The driver must therefore be prepared to intervene. There are also details to bear in mind while parking, e.g.:

- PAP starts out from the current location of the parked vehicles - if they are inappropriately parked then the car's tyres



### Park Assist Pilot - PAP\*

and wheel rims may be damaged against kerbs.


- PAP is designed for parking on straight streets, not sharp curves or bends. For this reason, make sure the car is parallel to the parking space when PAP measures the space.
- It is not always possible to find parking spaces on narrow streets since there is not enough space for manoeuvring. In such parking situations, it helps the system to drive as close to the side of the road as possible where you intend to park.
- Bear in mind that the front of the car may swing out towards oncoming traffic while being parked.
- Objects situated higher than the detection areas of the sensors are not included when calculations are made for the parking manoeuvre. This may cause PAP to swing into the parking space too early - for this reason, such parking slots should be avoided.
- The driver is responsible for determine whether the space selected by PAP is suitable for parking.

- Use approved tyres<sup>1</sup> with the correct tyre pressure as this affects PAP's ability to park the car.
- Heavy rain or snow may cause the system to measure the parking space incorrectly.
- Do not use PAP if snow chains or a spare wheel are fitted.
- Do not use PAP if loaded objects are protruding from the car.

#### **IMPORTANT**

The PAP system's parameters may need to be updated when changing to another approved wheel rim size involving changed tyre circumference. Consult a workshop - an authorised Volvo workshop is recommended.

### Maintenance

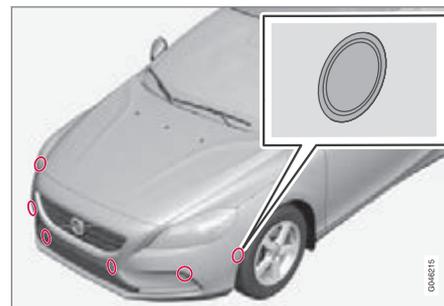

The PAP sensors are located in the bumpers - 6 front and 4 rear.

For the PAP function to work correctly, its sensors must be cleaned regularly with water and car shampoo - these are the same sensors as are used by parking assistance, see page 188.

<sup>1</sup> "Approved tyres" refers to tyres of the same type and make as those fitted new on delivery from the factory.

**Park Assist Pilot - PAP\*****Symbols and text messages**

The combined instrument panel can show different combinations of symbols and text with varying content - sometimes with a self-explanatory piece of advice on appropriate action.

If a message says that PAP is disengaged, contact with an authorised Volvo workshop is recommended.



## BLIS and CTA\*

### General information on BLIS and CTA

The BLIS function (Blind Spot Information System) is designed for driving in dense traffic on roads with several lanes in the same direction. BLIS is a driver's aid intended to provide a warning about:

- vehicles in the car's blind spot
- quickly approaching vehicles in the left and right lanes closest to the car.

The BLIS function CTA (Cross Traffic Alert) is a driver's aid intended to provide a warning about:

- crossing traffic when the car is reversed.


### WARNING

BLIS and CTA are supplementary aids and do not work in all situations.

BLIS and CTA are no substitutes for a safe driving style and the use of rearview and door mirrors.

BLIS and CTA can never replace the driver's responsibility and attention - it is always the driver's responsibility to reverse and change lanes in a safe manner.

### Operation

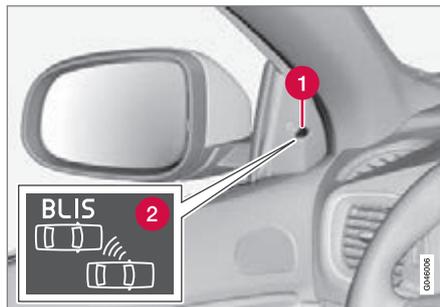

Position of the BLIS lamp<sup>1</sup>.

- 1 Indicator lamp
- 2 BLIS symbol

### NOTE

The lamp illuminates on the side of the car where the system has detected the vehicle. If the car is overtaken on both sides at the same time then both lamps illuminate.

### Function

BLIS and CTA are activated when the engine is started. This is confirmed by the indicator lamps in the door panels flashing once.

### Activate/deactivate BLIS



Button for activating/deactivating.

The **BLIS** function can be deactivated/activated by pressing the **BLIS** button on the centre console.

Some combinations of the selected equipment leave no vacant space for a button in the centre console - in which case the function is handled by the car's menu system **MY CAR**<sup>2</sup>:

<sup>1</sup> NOTE: The illustration is schematic - details may vary depending on car model.

<sup>2</sup> For information on the menu system - see page 207.



## BLIS and CTA\*


- Select **On** or **Off** at **Settings** → **Car settings** → **BLIS**.

When BLIS is deactivated/activated the lamp in the button goes out/illuminates and the combined instrument panel confirms the change with a text message. The door panel indicator lamps flash once upon activation.

To extinguish the message:

- Press the left stalk switch **OK** button.
- or
- Wait approx. 5 seconds – the message extinguishes.

### When BLIS operates

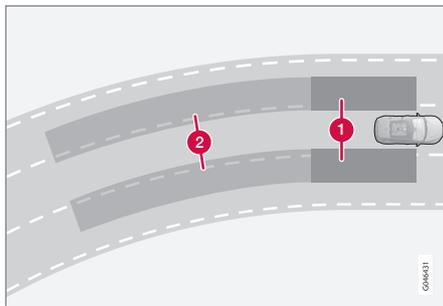

Principle for BLIS: 1. Zone in blind spot. 2. Zone for quickly approaching vehicle.

The BLIS function is active at speeds above approx. 10 km/h.

The system is designed to react when:

- the vehicle is overtaken by other vehicles
- another vehicle is quickly approaching the vehicle

When BLIS detects a vehicle in zone 1 or a quickly approaching vehicle in zone 2, the door panel BLIS lamp illuminates with a constant glow. If the driver activates the direction indicator on the same side as the warning in this situation then the BLIS lamp will change from a constant glow to flashing with a more intense light.

### WARNING

BLIS does not work in sharp bends.

BLIS does not work when the car is being reversed.

### Activate/deactivate CTA

In cars equipped with parking assistance (see page 186), the CTA function can be deactivated/activated with the parking assistance On/Off button.



On/Off for parking assistance and CTA sensors.

CTA itself can be deactivated in the **MY CAR**<sup>2</sup> menu system as follows:


- Go to **Settings** → **Car settings** → **BLIS** → **Cross Traffic Alert** and deselect. The CTA function is then deactivated. BLIS remains activated.

<sup>2</sup> For information on the menu system - see page 207.



## BLIS and CTA\*

### When CTA operates

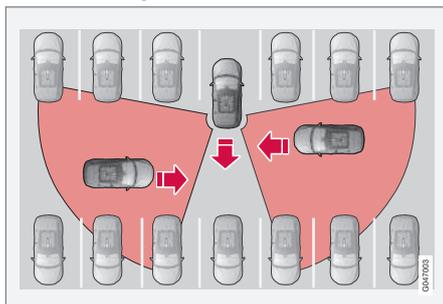

Principle for CTA.

CTA supplements the BLIS function by being able to see crossing traffic from the side during reversing, such as when reversing out of a parking space.

CTA is primarily designed to detect vehicles. In favourable conditions, it may also be able to detect smaller objects, such as cyclists and pedestrians.

CTA is only active during reversing and is activated automatically when reverse is selected at the gearbox.

- If CTA detects something approaching from the side, an acoustic warning signal sounds. The signal comes from either the left or the right speaker depending on


which direction the approaching object is coming from.

- CTA also warns by illuminating the BLIS lamps.
- An additional warning is provided in the form of an illuminated icon in the screen's PAS graphics, see page 186.

### Limitations


CTA does not perform optimally in all situations, but has a certain limitation - for example, the CTA sensors cannot "see" through other parked vehicles or obstructing objects.

Here are some examples of when CTA's "field of vision" may be limited from the beginning and approaching vehicles cannot therefore be detected until they are very close:

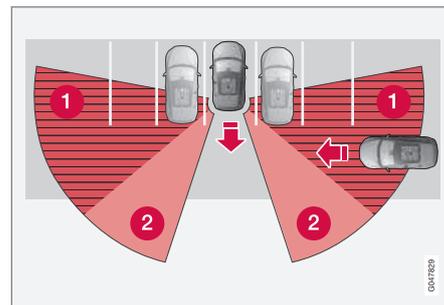

The car is parked deep inside a parking slot.

- 1 Blind CTA sector.
- 2 Sector where CTA can detect/"see".

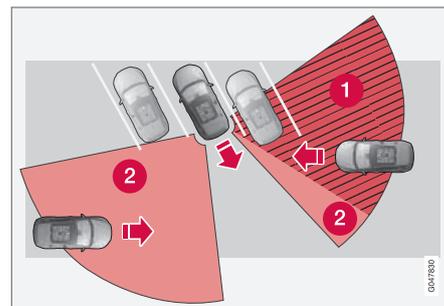

In an angled parking slot CTA can be completely "blind" on one side.



**BLIS and CTA\***

However, when the driver is slowly reversing the car, the angle is changed in relation to the vehicle/object that is blocking, at which the blind sector rapidly decreases.

Examples of further limitations:

- Dirt, ice and snow covering sensors can reduce functionality and make it impossible to provide warnings. BLIS and CTA are unable to detect hazards if covered.
- Do not affix any objects, tape or labels in the area of the sensors.
- BLIS and CTA are deactivated when a trailer is connected to the car's electrical system.

**! IMPORTANT**

Repair of the BLIS and CTA functions' components must only be performed by a workshop - an authorised Volvo workshop is recommended.

**Maintenance**



*Location of BLIS and CTA sensors.*

The BLIS and CTA sensors are located inside the rear wing/bumper on each side of the car.

- To ensure optimal functionality, the areas in front of the sensors must be kept clean.

**Messages**

In situations where the BLIS and CTA functions fail or are interrupted, the combined instrument panel may show a symbol, supplemented by an explanatory message. Follow any recommendation given.

Message examples:

Message	Specification
CTA OFF	CTA has been deactivated manually. BLIS is active.
BLIS and CTA OFF Trailer attached	BLIS and CTA are temporarily disabled because a trailer is connected to the car's electrical system.
BLIS and CTA Service required	BLIS and CTA are not working. <ul style="list-style-type: none"> <li>• Visit a workshop if the message remains - an authorised Volvo workshop is recommended.</li> </ul>

04

A text message can be acknowledged by briefly pressing the **OK** button on the direction indicator stalk.

\* Option/accessory, for more information, see Introduction.

Menus and messages.....	204
Menu source MY CAR.....	207
Climate control.....	215
Engine and passenger compartment heater*.....	226
Additional heater*.....	230
Trip computer.....	232
Adapting driving characteristics.....	240
Comfort inside the passenger compartment.....	241



# 05


## COMFORT AND DRIVING PLEASURE






## Menus and messages

### Combined instrument panel

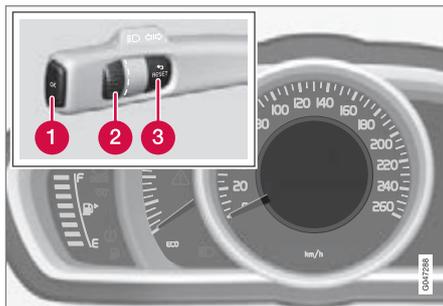

Information display (analogue combined instrument panel) and controls for menu navigation.

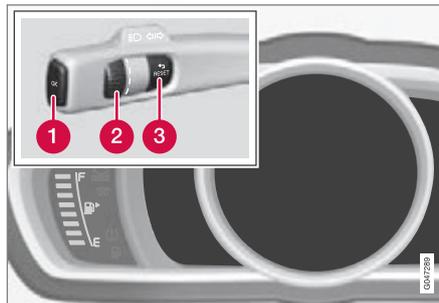

Information displays (digital combined instrument panel) and controls for menu navigation.

- 1 **OK** - access the menu, acknowledge messages and confirm menu selections.
- 2 Thumbwheel – browse between menu options.
- 3 **RESET** - reset data in the selected trip computer step and go back in the menu structure.

The menus shown on the display in the combined instrument panel are controlled with the left-hand stalk switch. The menus shown depend on key position, see page 81. If a message appears then this must be acknowledged with **OK** for the menus to be shown.

### Menu overview

Some of the following menu options require the function and hardware to be installed in the car.

#### Analogue combined instrument panel

##### Digital speed

##### Parking heater\*

##### Additional heater\*

##### TC options

##### Service status

##### Oil level<sup>1</sup>

##### Messages (##)<sup>2</sup>

#### Digital combined instrument panel

##### Settings\*

##### Themes

##### Contrast mode/Colour mode

##### Service status

##### Messages<sup>2</sup>

##### Oil level<sup>1</sup>

##### Parking heater\*

##### Trip computer reset

1 Certain engines.

2 The number of messages is indicated in brackets.

\* Option/accessory, for more information, see Introduction.



## Menus and messages

### Message

When a warning, information or indicator symbol illuminates, a corresponding message appears in the display. An error message is stored in a memory list until the fault has been rectified.

Press **OK** (see the figure in the section "Combined instrument panel" on page 204) in order to confirm<sup>3</sup> a message. Scroll through messages with the thumbwheel.

#### NOTE

If a warning message appears while you are using the trip computer, the message must be read (press **OK**) before the previous activity can be resumed.

Message	Specification
<b>Stop safely<sup>A</sup></b>	Stop and switch off the engine. Serious risk of damage - consult a workshop <sup>B</sup> .
<b>Stop engine<sup>A</sup></b>	Stop and switch off the engine. Serious risk of damage - consult a workshop <sup>B</sup> .

Message	Specification
<b>Service urgent<sup>A</sup></b>	Contact a workshop <sup>B</sup> to check the car immediately.
<b>Service required<sup>A</sup></b>	Contact a workshop <sup>B</sup> to check the car as soon as possible.
<b>See manual<sup>A</sup></b>	Read the owner's manual.
<b>Book time for maintenance</b>	Time to book regular service - contact a workshop <sup>B</sup> .
<b>Time for regular maintenance</b>	Time for regular service - contact a workshop <sup>B</sup> . The timing is determined by the number of kilometres driven, number of months since the last service, engine running time and oil grade.
<b>Maintenance overdue</b>	If the service intervals are not followed then the warranty does not cover any damaged parts - contact a workshop <sup>B</sup> .

Message	Specification
<b>Transmission Oil change needed</b>	Contact a workshop <sup>B</sup> to check the car as soon as possible.
<b>Transmission Reduced performance</b>	The gearbox cannot handle full capacity. Drive carefully until the message clears <sup>C</sup> . If shown repeatedly - contact a workshop <sup>B</sup> .
<b>Transmission hot Reduce speed</b>	Drive more smoothly or stop the car in a safe manner. Disengage the gear and run the engine at idling speed until the message clears <sup>C</sup> .
<b>Transmission hot Stop safely Wait for cooling</b>	Critical fault. Stop the car immediately in a safe manner and contact a workshop <sup>B</sup> .

<sup>3</sup> A message can also be acknowledged via the thumbwheel or **RESET** button.



## Menus and messages

Message	Specification
Temporarily off <sup>A</sup>	A function has been temporarily switched off and is reset automatically while driving or after starting again.
Low battery charge Power save mode	The audio system is switched off to save energy. Charge the battery.

<sup>A</sup> Part of message, shown together with information on where the problem has arisen.

<sup>B</sup> An authorised Volvo workshop is recommended.

<sup>C</sup> For more messages concerning automatic transmission, see page 123.



## Menu source MY CAR

### General information on MY CAR



Many of the car's functions are handled in this menu source, such as setting the clock, door mirrors and locks.

Navigation in the menus is carried out using buttons on the centre console or with the steering wheel's right-hand keypad.

Certain functions are standard, others are optional - the range also varies depending on the market.

### Operation

#### Centre console controls



Centre console controls for menu navigation.

- 1 Press **MY CAR** to open the menus under **MY CAR**.
- 2 Press **OK MENU** to select/tick in the highlighted menu option or to store the selected function in the memory.
- 3 Turn the **TUNE** knob to scroll up/down among the menu options.
- 4 **EXIT**

#### EXIT functions

Depending on the function the cursor is on when **EXIT** is pressed, and on the menu level, one of the following occurs:

- phone call is rejected
- current function is interrupted
- input characters are deleted
- most recent selections are undone
- leads up in the menu system.

Short and long presses can also produce varying results.

A long press leads to the highest menu level (Parent view), from where all of the car's functions/menu sources can be accessed, see page 251.



## Menu source MY CAR

### Steering wheel keypad\*



The keypad may vary depending on audio level, see page 248.

- 1 Turn the thumbwheel knob to scroll up/down among the menu options.
- 1 Press the thumbwheel to select/tick in the highlighted menu option or to store the selected function in the memory.
- 2 EXIT (see heading "EXIT functions" page 207).

### Search paths

Current menu level is shown at the top right of the centre console's screen. Search paths to the menu system functions are described in this manual in the following form:

Settings → Car settings → Lock settings  
→ Doors unlock → Driver door, then all.

The following is an example of how a function can be accessed and adjusted using the steering wheel keypad:

1. Press the centre console button **MY CAR**.
2. Scroll to the desired menu, e.g. **Settings**, with the thumbwheel (1) and then **press** the thumbwheel - a submenu opens.
3. Scroll to the desired menu, e.g. **Car settings** and press the thumbwheel - a submenu opens.
4. Scroll to **Lock settings** and press the thumbwheel - a new submenu opens.
5. Scroll to **Doors unlock** and press the thumbwheel - a submenu of selectable functions opens.
6. Choose between the options **All doors** and **Driver door, then all** and press the thumbwheel - a cross is marked in the option's empty box.
7. Exit the programming by backing out of the menus incrementally with short presses on **EXIT** (2) or with one long press.

The procedure is the same as with the centre console's buttons - see page 207: **OK MENU** (2), **EXIT** (4) and the **TUNE** knob (3).

### MY CAR

The following options are available in menu source **MY CAR**:



- My V40
- Trip statistics
- DRiVe
- Support systems
- Settings



## Menu source MY CAR

### My V40



### MY CAR → My V40

The screen shows a grouping of all of the car's driver support systems - these can be activated or deactivated here.

### Trip statistics

#### MY CAR → Trip statistics

The screen shows the history as a bar chart with average fuel consumption and average speed, see page 238.

### DRIVE


#### MY CAR → DRIVE

An introduction of Volvo's Start-Stop system is presented here, as well as recommendations for energy-saving driving techniques.

- Start/Stop
- Eco driving guide

For more information - see page 125.

### Driver support system

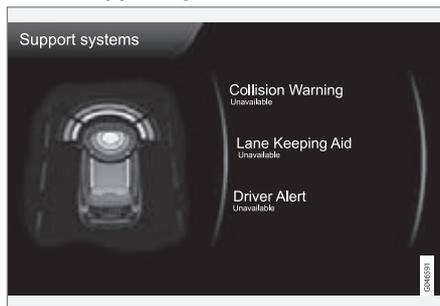

### MY CAR → Support systems

The screen shows a summary of the current status of the car's driver support systems.

### Setup - menus

The menus are structured as follows:

Menu level 1	
Menu level 2	p. ....
Menu level 3	
Menu level 4	

Shown here are the 4 first menu levels under **MY CAR → Settings**. Some menus have further submenus - these are then described in detail in their respective sections.

When selecting whether a function should be activated/**On** or deactivated/**Off** a square is displayed:

**On:** Selected square.

**Off:** Empty square.

- Select **On/Off** with **OK** - then back out of the menu with **EXIT**.

Car settings	
Car key memory	p. 84 and 106
On	
Off	



## Menu source MY CAR

<b>Lock settings</b>	p. 46, 54 and 57
Automatic door locking	
On	
Off	
Doors unlock	
All doors	
Driver door, then all	
Keyless entry	
All doors	
Any door	
Doors on same side	
Both front doors	
Audible confirmation	
On	
Off	
<b>Reduced Guard</b>	p. 60 and 64
Activate once	
Ask when exiting	

<b>Side mirror settings</b>	p. 106
Fold mirrors	
Tilt left mirror	
Tilt right mirror	
<b>Light settings</b>	p.96
Interior light	
Floor lights	
Ambient light	
Ambient light colours	
Door lock confirmation light	p.44
On	
Off	
Unlock confirmation light	
On	
Off	

Approach light duration	p. 46 and 97
Off	
30 sec	
60 sec	
90 sec	
Home safe light duration	p.97
30 sec	
60 sec	
90 sec	
Triple indicator	p.95
On	
Off	
Temporary LH traffic	p.97
On	
Off	
or	
Temporary RH traffic	
On	
Off	

05



## Menu source MY CAR

Active bending lights On Off	p.93
Auxiliary lights On Off	p.91
<b>Steering wheel force</b> Low Medium High	p. 240
<b>Speed in infotainment display</b> On Off	
<b>Reset car settings</b> All menus in <b>Car settings</b> are given original factory settings.	
<b>Driver support systems</b>	

<b>Collision Warning</b> On Off Warning distance Long Normal Short Warning sound On Off	p. 170
--	--------

<b>Lane Keeping Aid</b> On Off On at start-up On Off Increased sensitivity* On Off Assistance alternatives Vibration only Steering assist only Full function	p. 182
<b>Road Sign Information</b> On Off	p. 143
<b>Speed alert</b> On Off	

05





## Menu source MY CAR

<b>DSTC</b> On Off	p. 140
<b>City Safety</b> On Off	p. 164
<b>BLIS</b> On Off	p. 198
<b>Cross Traffic Alert</b> On Off	
<b>Distance Alert</b> On Off	p. 161
<b>Driver Alert</b> On Off	p. 179
<b>System options</b>	

<b>Time</b> The combined instrument panel's clock is adjusted here.	p.79
<b>Time format</b> 12 h 24 h	p.79
<b>Screen saver</b> On Off The screen's current content fades out after a period of inactivity and is replaced by a blank screen if this option is selected. The current screen content returns if any of the screen's buttons or controls are actuated.	p. 207
<b>Language</b> Selects language for menu texts.	

<b>Show help text</b> On Off Explanatory text for the screen's current content is shown with this option selected.	
<b>Distance and fuel units</b> MPG (UK) MPG (US) km/l l/100km	p. 232
<b>Temperature unit</b> Celsius Fahrenheit Selects the unit for the display of outside temperature and setting of the climate control system.	
<b>Volume levels</b> Voice output volume Front park assist volume Rear park assist volume Phone ringing volume	



## Menu source MY CAR

**Reset system options**

All menus in **System options** are given original factory settings.

**Voice settings**

Only in cars with Volvo GPS navigator RTI\* - see separate manual.

**Voice tutorial**

This menu option + **OK** provides spoken information about how the system works.

**Voice command list**

## Phone commands

Phone

Phone call contact

Phone dial number

## Navigation commands

Navigation

Navigation repeat ins

Navigation go to add

## General commands

Help

Cancel

Voice tutorial

The menu options under **Phone commands** show several examples of available voice commands - only with a Bluetooth®-enabled mobile phone installed. For more and detailed information - see page 276.

The menu options under **Navigation commands** show several examples of available voice commands in the navigation system.

**Voice user setting**

Default setting

User 1

User 2

Here there is the option to create a second user profile - an advantage if more than one person shall use the car/system regularly. **Default setting** resets to factory settings.

**Voice training**

User 1

User 2

With **Voice training** the voice recognition system is taught to recognise the driver's voice and pronunciation. A number of phrases are presented on the screen for the driver to read aloud. When the system has learnt how the driver talks, the presentation of the phrases stops. Following which e.g. **User 1** can be selected in **Voice user setting** in order that the system shall listen to the right user.



## Menu source MY CAR

<p><b>Voice output volume</b></p> <p>A volume control appears on the screen - at which point, proceed as follows:</p> <ol style="list-style-type: none"> <li>1. Adjust the volume with the thumbwheel.</li> <li>2. Test-listen using <b>OK</b>.</li> <li>3. Use <b>EXIT</b> to store the setting and the menu is switched off.</li> </ol>		<p><b>Automatic blower adjustment</b></p> <p>Normal</p> <p>High</p> <p>Low</p> <p><b>Recirculation timer</b></p> <p>On</p> <p>Off</p> <p><b>Automatic rear defroster</b></p> <p>On</p> <p>Off</p> <p><b>Interior air quality system</b></p> <p>On</p> <p>Off</p> <p><b>Reset climate settings</b></p> <p>All menus in <b>Climate settings</b> are given original factory settings.</p>	p. 220	<p><b>Number of keys</b></p> <p>p.44</p>
<p><b>Voice POI list</b></p> <p>Edit list</p> <p>The number of facilities is extensive and varies depending on market. Maximum 30 favourite facilities can be stored in this list.</p> <p>For more information on Facilities and Voice recognition - see the Navigation system's owner's manual.</p>		<p><b>Favourites (FAV)</b></p>	p. 252	<p><b>VIN number</b></p> <p>p. 376</p>
<p><b>Audio settings</b></p>	p. 248	<p><b>Volvo On Call</b></p> <p>Described in a separate manual.</p>		<p><b>DivX® VOD code</b></p> <p>p. 269</p>
<p><b>Climate settings</b></p>		<p><b>Information</b></p>		<p><b>Bluetooth software version in car</b></p> <p>p. 275</p>
				<p><b>Map and software version*</b></p> <p>Only in cars with Volvo GPS navigator - see separate manual.</p>

\* Option/accessory, for more information, see Introduction.



## General

### Climate control

The car is equipped with electronic climate control. The climate control system cools or heats as well as dehumidifies the air in the passenger compartment.

#### NOTE

The air conditioning system (AC) can be switched off, but to ensure the best possible climate comfort in the passenger compartment and to prevent the windows from misting, it should always be on.

### Actual temperature

The temperature you select corresponds to the physical experience with reference to factors such as air speed, humidity and solar radiation etc. in and around the car.

The system includes a sun sensor which detects on which side the sun is shining into the passenger compartment. This means<sup>1</sup> that the temperature can differ between the right and left-hand air vents despite the controls being set for the same temperature on both sides.

<sup>1</sup> Only applies to ECC.

### Sensor location

- The sun sensor is located on the top side of the dashboard.
- The temperature sensor for the passenger compartment is located below the climate control panel.
- The outside temperature sensor is located in the door mirror.

#### NOTE

Do not cover or block the sensors with clothing or other objects.

### Side windows

To ensure that the air conditioning works optimally, the side windows must be closed.

### Misting windows

Remove misting on the insides of the windows by primarily using the defroster function.

To reduce the risk of misting, keep the windows clean and use window cleaner.

### Temporary shut-off of the air conditioning

When the engine requires full power, e.g. for full acceleration or driving uphill with a trailer, the air conditioning can be temporarily

switched off. There may then be a temporary increase in temperature in the passenger compartment.

### Condensation

In warm weather, condensation from the air conditioning may drip under the car. This is normal.

### Ice and snow

Remove ice and snow from the climate control system air intake (the grille between the bonnet and the windscreen).

### Total airing function

The function opens/closes all side windows simultaneously and can be used for example to quickly air the car during hot weather, see page 57.

### Passenger compartment filter

All air entering the car's passenger compartment is cleaned with a filter. This must be replaced at regular intervals. Follow the Volvo Service Programme for the recommended replacement intervals. If the car is used in a severely contaminated environment, it may be necessary to replace the filter more often.



## Climate control

### NOTE

There are different types of passenger compartment filter. Make sure that the correct filter is fitted.

### Clean Zone Interior Package (CZIP)\*

This option keeps the passenger compartment clear of allergy and asthma inducing substances. For more information on CZIP, see the brochure included with the purchase of the car.

The following is included:

- An enhanced fan function that means that the fan starts when the car is opened with the remote control key. The fan fills the passenger compartment with fresh air. The function starts when required and is disengaged automatically after a time or when one of the passenger compartment doors is opened.
- The air quality system IAQS is a fully automatic system that cleans the air in the passenger compartment from contaminants such as particles, hydrocarbons, nitrous oxides and ground-level ozone.

### NOTE

To maintain the CZIP standard in cars with CZIP the IAQS filter should be changed after 15 000 km or once per year depending on whichever occurs first. However, up to 75 000 km over 5 years. In cars without CZIP and where the customer does not want to retain the CZIP standard, the IAQS filter must be replaced during a regular service.

### Use of tested materials in the interior equipment.

The materials have been developed in order to minimise the quantity of dust in the passenger compartment and they contribute to making the passenger compartment easier to keep clean. The carpets in both the passenger compartment and the cargo area are removable and easy to remove and clean. Use cleaning agents and car care products recommended by Volvo, see page 370.


### Menu settings

It is possible to activate/deactivate or change the default settings for four of the climate control system's functions via the centre console. For general information about menu navigation, see page 208:

- Fan level for automatic climate control\*, see page 221.
- Recirculation timer, see page 223.
- Automatic start of rear window defroster, see page 107.
- Air quality system\*, see page 224

The climate control system's functions can be reset to the default settings via the menu system in **MY CAR** and this is carried out under: **Settings** → **Climate settings** → **Reset climate settings**.

### Air distribution

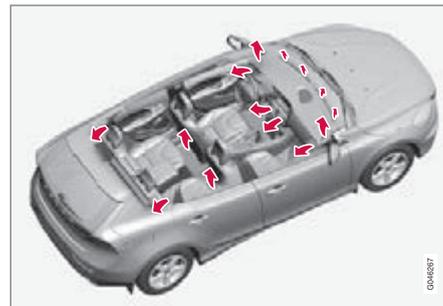

The incoming air is divided between a number of different vents in the passenger compartment.


GM46307



## Climate control

Air distribution is fully automatic in **AUTO** mode\*.

If necessary it can be controlled manually, see page 224.

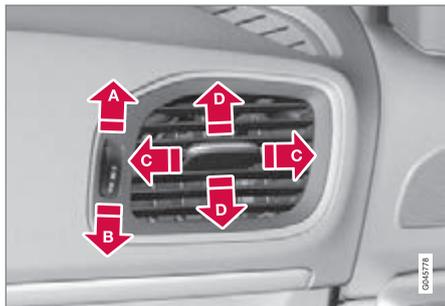**Air vents in the dashboard**

- A** Open
- B** Closed
- C** Lateral airflow
- D** Vertical airflow

Aim the vents at the side windows to remove misting.

**i NOTE**

Remember that small children may be sensitive to air flows and draughts.




## Climate control

### Electronic climate control, ECC\*



- 1 Fan
- 2 **AUTO**
- 3 Electrically heated front seat, left-hand side
- 4 Heated windscreen\* and max. defroster
- 5 Air distribution - ventilation floor
- 6 Air distribution - air vent instrument panel
- 7 Air distribution - defroster windscreen
- 8 Rear window and door mirror defrosters, see page 107
- 9 Setting, left/right side for temperature regulation
- 10 Electrically heated front seat, right-hand side
- 11 Temperature control
- 12 Recirculation
- 13 **AC** – – Air conditioning on/off

046779

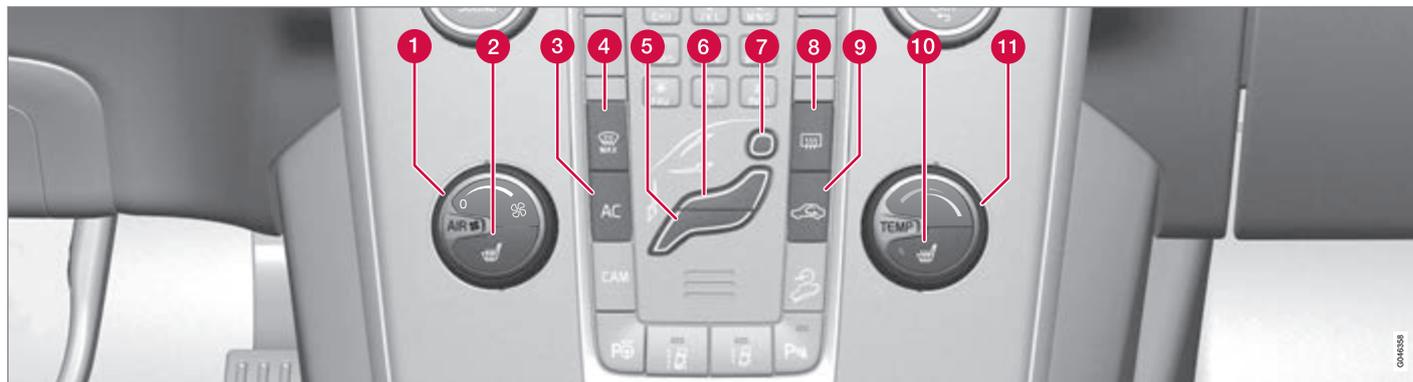**Electronic Temperature Control, ETC**

- 1 Fan
- 2 Electrically heated front seat, left-hand side
- 3 AC -- Air conditioning on/off
- 4 Heated windscreen\* and max. defroster
- 5 Air distribution - ventilation floor
- 6 Air distribution - air vent instrument panel
- 7 Air distribution - defroster windscreen
- 8 Rear window and door mirror defrosters, see page 107
- 9 Recirculation
- 10 Electrically heated front seat, right-hand side
- 11 Temperature control

**Operating the controls****Heated seats\*****WARNING**

Heated seats must not be used by people who find it difficult to perceive an increase in temperature due to a lack of sensation or who otherwise have problems operating the controls for the heated seats. Otherwise they may suffer burn injuries.



## Climate control

### Front seats



Current heat level is shown in the centre console display screen.



Press the button repeatedly in order to activate the function:

- Highest heat level - three orange fields illuminate in the centre console's screen (see figure above).
- Lower heat level - two orange fields illuminate in the screen.
- Lowest heat level - one orange field illuminates in the screen.

- Switch off the heat - no field illuminates.

### Rear seat



Current heat level is shown in the pushbutton's lamps:

Press the button repeatedly in order to activate the function:

- Highest heat level - three lamps illuminate.
- Lower heat level - two lamps illuminate.
- Lowest heat level - one lamp illuminates.
- Switch off the heat - no lamp illuminates.

### Fan

**NOTE**

If the fan is fully switched off then the air conditioning is not engaged - which can cause a risk of misting on the windows.

### Fan knob for ECC\*



Turn the knob to increase or decrease fan speed, **AUTO** is disengaged. If **AUTO** is selected, the fan speed is regulated automatically - the fan speed previously set is disengaged.

### Fan knob for ETC




Turn the knob to increase or decrease fan speed.



## Climate control

## Air distribution

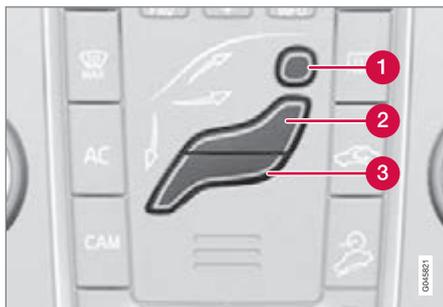

- ❶ Air distribution - defroster windscreen
- ❷ Air distribution - air vent instrument panel
- ❸ Air distribution - ventilation floor

The figure consists of three buttons. When pressing the buttons the corresponding figure is illuminated in the display screen (see figure below) and an arrow in front of each part of the figure shows the air distribution that is selected. For more information on air distribution, see page 224.



The selected air distribution is shown in the centre console display screen.

AUTO<sup>1</sup>

The Auto function automatically regulates temperature, air conditioning, fan speed, recirculation, and air distribution.

If you select one or more manual functions, the other functions continue to be controlled automatically. All manual settings are disengaged when **AUTO** is pressed. The display screen shows **AUTO CLIMATE**.

Fan speed in automatic mode can be set in the menu system **MY CAR** under: **Settings**

→ **Climate settings** → **Automatic blower adjust**. Choose between **Low**, **Normal** or **High**:

- **Low** - Automatic fan control. Low airflow is prioritised.
- **Normal** - Automatic fan control.
- **High** - Automatic fan control. A more intense airflow is prioritised.

For a description of the menu system, see page 208.

## Temperature control

When the car is started, the most recent setting is resumed.

**i** NOTE

Heating or cooling cannot be hastened by selecting a higher or lower temperature than the actual desired temperature.

<sup>1</sup> Only applies to ECC.



## Climate control

### Temperature regulation ECC\*



Current temperature for each side is shown in the centre console's display screen.



The temperatures on the driver and passenger sides can be set independently. Repeatedly press **L/R** in the button to select the setting for left, right or both sides.

Set the temperature using the knob - the selected temperature for either side is displayed in the centre console display.

### Temperature regulation ETC



The temperature in the passenger compartment can be adjusted with the knob.


### AC – Air conditioning on/off



When the lamp in the **AC** button illuminates, the air conditioning is controlled by the system's automatic function. This way, incoming air is cooled and dehumidified as required.

When the lamp in the **AC** button is switched off the air conditioning is disconnected. Other functions are still controlled automatically. When the max. defroster function is activated the air conditioning is switched on automatically, so that the air is dehumidified at the maximum setting.

### Heated windscreen\* and max. defroster

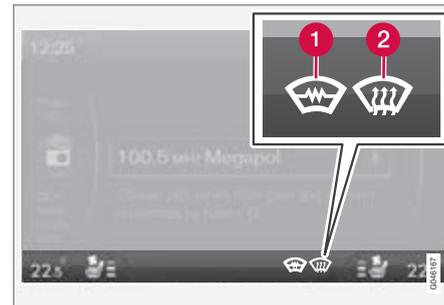

The selected setting is shown in the centre console display screen.

- 1 Electric heating\*
- 2 Max. defroster



Used to quickly remove misting and ice from the windscreen and side windows. The light in the defroster button illuminates when the function is active.

Press the button repeatedly in order to activate the function.



## Climate control

For cars without heated windscreens:

- Air flows to the windows - symbol (2) illuminates in the screen.
- Switch off the function - no symbol illuminates.

For cars with heated windscreens:

- Start the heating for the windscreen<sup>2</sup> - symbol (1) illuminates in the screen.
- Start the heating for the windscreen<sup>2</sup> and air flow to the windows - symbols (1) and (2) illuminate in the screen.
- Switch off the function - no symbol illuminates.

### NOTE

Electrically heated windscreen and IR window, see page 104, can have an impact on the performance of transponders and other communication equipment.

### NOTE

A triangular area at the end of each side of the windscreen is not electrically heated, where de-icing may take longer.

### NOTE

Electrically heated windscreen is not available when the engine is auto-stopped, see page 125.

The following also takes place when the function is active in order to provide maximum dehumidification in the passenger compartment:

- the air conditioning is automatically engaged
- recirculation and the air quality system are automatically disengaged.

### NOTE

The noise level increases as the fan is operating at max.

When the defroster is switched off the climate control returns to the previous settings.

## Recirculation



When recirculation is engaged the orange lamp in the button illuminates. The function is selected to shut out bad air, exhaust gases etc. from the passenger compartment. The air in the passenger compartment is recirculated, i.e. no outside air is taken into the car when this function is activated.

### IMPORTANT

If the air in the car recirculates for too long, there is a risk of misting on the insides of the windows.

## Timer

With the timer function activated the system will exit manually activated recirculation mode according to a time that depends on the outside temperature. This reduces the risk of ice, misting and bad air. Activate/deactivate the function in the menu system **MY CAR** under **Settings → Climate settings → Recirculation timer**. For a description of the menu system, see page 208.

<sup>2</sup> The compass goes off when the heated windscreen is active.



# 05 Comfort and driving pleasure

## Climate control

### NOTE

When max. defroster is selected, recirculation is always deactivated.

### Air quality system\*

The air quality system (IAQS) separates gases and particles to reduce the levels of odours and contaminants in the passenger compartment. If the outside air is contaminated then the air intake is closed and the air is recirculated.

Activate/deactivate the function in the menu system **MY CAR** under **Settings** → **Climate settings** → **Interior air quality system**. For a description of the menu system, see page 208.

### NOTE

The air quality sensor must always be enabled to ensure the best air in the passenger compartment.

In a cold climate, automatic recirculation is limited so as to prevent misting.

### Cars with Start/Stop\*

With an auto-stopped engine certain equipment has its function temporarily reduced, e.g. climate control air conditioning and fan speed. For more information, see page 125.

### Air distribution table

	Air distribution	Use		Air distribution	Use
	A large amount of hot air flows to the windows.	to remove ice and misting quickly.		Air to the floor and windows. Some air flows from the dashboard air vents.	to ensure comfortable conditions and good demisting in cold or humid weather.
	Air to windscreen, via defroster vent, and side windows. Some air flows from the air vents.	to prevent misting and icing in a cold and humid climate, (not at too low fan speed to enable this).		Air to floor and from dashboard air vents.	in sunny weather with cool outside temperatures.

05



## Climate control

	Air distribution	Use		Air distribution	Use
	Airflow to windows and from dashboard air vents.	to ensure good comfort in warm, dry weather.		Air to floor. Some air flows to the dashboard air vents and windows.	to direct heat or cold to the floor.
	Airflow to the head and chest from the dashboard air vents.	to ensure efficient cooling in warm weather.		Airflow to windows, from dashboard air vents and to the floor.	to provide cooler air along the floor or warmer air higher up in cold weather or hot, dry weather.

## Engine and passenger compartment heater\*

### General

The parking heater (fuel-driven) prepares the engine and passenger compartment before departure so that wear and energy needs during the journey are reduced. Warming up your car will also extend the driving distance.

The heater can be started directly or with timer.

Two different times can be selected using the timer. Here, time refers to the time when the car is heated and ready. The car's electronic system calculates when heating should be started based on the outside temperature.

### Fuel-driven heater

The fuel-driven heater cannot start if the outside temperature exceeds 15 °C. At -5 °C or lower the maximum running time of the heater is 50 minutes.


#### WARNING

Do not use the fuel-driven heater indoors. Exhaust gases are secreted.

#### NOTE

When the fuel-driven auxiliary heater is active there may be smoke from underneath the car, which is perfectly normal.

### Refuelling

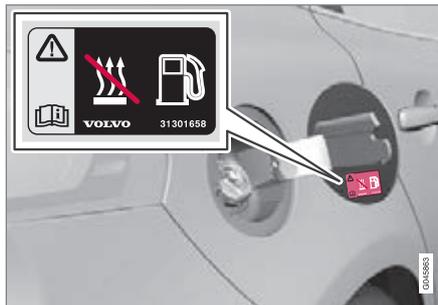

Warning label on fuel filler flap.

#### WARNING

Fuel which spills out could be ignited. Switch off the fuel-driven auxiliary heater before starting to refuel.

Check in the combined instrument panel that the heater is switched off. The heat symbol is shown when it is operating.

### Parking on a hill

If the car is parked on a steep hill, the front of the car should point downhill to ensure that there is a supply of fuel to the fuel-driven heater.

### Battery and fuel

If the battery has insufficient charge or the fuel level is too low, the heater will be switched off automatically and a message appears in the display. Acknowledge the message by pressing the indicator stalk **OK** button once, see page 227.

#### IMPORTANT


Repeated use of the heater in combination with short driving distances may cause low charge level in the starter battery, this can lead to the heater stopping or never starting. In the worst case, engine starting will not be possible.

The car should be driven for the same time as the heater is used to ensure that the starter battery is recharged adequately to replace the energy consumed by the heater when it is used on a regular basis. The heater is used for a maximum of 50 minutes each time.




## Engine and passenger compartment heater\*

### Operation

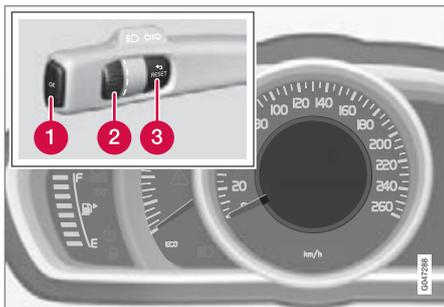

Information display (analogue combined instrument panel) and controls for menu navigation.

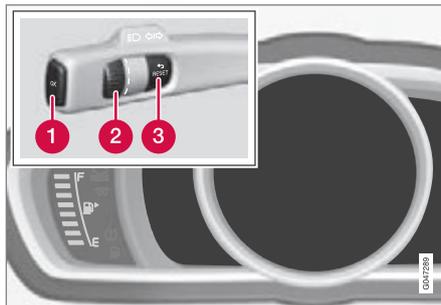

Information displays (digital combined instrument panel) and controls for menu navigation.

- 1 OK button
- 2 Thumbwheel
- 3 RESET

For more information on display and **OK**, see pages 71 and 204.

### Symbols and messages



When the heater has been activated the heat symbol illuminates in the display.

When one of the timers is activated, the symbol for activated timer illuminates in the display at the same time as the set time is shown next to the symbol.



Symbol for activated timer in analogue combined instrument panel.



Symbol for activated timer in digital combined instrument panel.

The table shows symbols and display texts that appear.





# 05 Comfort and driving pleasure

## Engine and passenger compartment heater\*

Symbol	Display	Specification
		The heater is switched on and running. The heater's timer is activated after the remote control key has been removed from the ignition switch and leaving the car - the engine and passenger compartment are heated at the set time.
 	Fuel operated heater stopped Battery saving mode	The heater has been stopped by the car's electronics in order to facilitate starting the engine.
 	Fuel operated heater stopped Low fuel level	Setting the heater is not possible due to fuel level being too low - this is in order to facilitate starting the engine as well as approx. 50 km driving.
	Fuel operated heater Service required	Heater not working. Contact a workshop for repair. Volvo recommends that you contact an authorised Volvo workshop.

A display text clears automatically after a time or after one press on the indicator stalk **OK** button.

### Direct start and immediate stop

Following the direct start of the heater it will be activated for 50 minutes.

Heating of the passenger compartment will begin as soon as the engine coolant has reached the correct temperature.



### NOTE

The car can be started and driven while the heater is running.

1. Press **OK** to access the menu.
2. Scroll with the thumbwheel to **Parking heater** and select with **OK**.



## Engine and passenger compartment heater\*

3. Scroll forward in the next menu to **Direct start/Stop** in order to activate/deactivate the heater and select with **OK**.
4. Exit the menu with **RESET**.

### Timer

The time when the car shall be used and heated is specified with the timer.

### Setting the timer

1. Press **OK** to access the menu.
2. Scroll with the thumbwheel to **Parking heater** and select with **OK**.
3. Select one of the two timers using the thumbwheel and confirm with **OK**.
4. Briefly press **OK** to move to the lit hours setting.
5. Select the required hour using the thumbwheel.
6. Briefly press **OK** to move to the lit minutes setting.
7. Select the required minute using the thumbwheel.
8. Press **OK**<sup>1</sup> to confirm the setting.

<sup>1</sup> Press **OK** again to activate the timer.

9. Go back in the menu structure using **RESET**.
10. Select the other time (continue from step 2) or exit the menu with **RESET**.

### Start the timer

1. Press **OK** to access the menu.
2. Scroll with the thumbwheel to **Parking heater** and select with **OK**.
3. Select one of the two timers using the thumbwheel and activate with **OK**.
4. Exit the menu with **RESET**.

### Deactivating the timer

A timer-started heater can be switched off manually before the set time has elapsed. Proceed as follows:

1. Press **OK** to access the menu.
2. Scroll with the thumbwheel to **Parking heater** and select with **OK**.
  - > If a timer is set but not activated, a clock icon is shown next to the set time.
3. Select one of the two timers using the thumbwheel and confirm with **OK**.

4. Deactivate the timer as follows:

- long press on **OK** or
- short press on **OK** to continue in the menu. Then select to stop the timer and confirm with **OK**.

5. Exit the menu with **RESET**.

A timer-started heater can be switched off as described in the instructions in the section "Direct start and immediate stop"; see page 228.

### Clock/timer

The heater's time is connected to the car's clock.



### NOTE

All timer programming will be cleared if the car's clock is reset.

## Additional heater\*

### General information about the additional heater

For cars with diesel engines sold in cold climate zones<sup>1</sup> an additional heater may be required to obtain the correct operating temperature in the engine and to obtain sufficient heating in the passenger compartment.

In such instances, the car is equipped with either:

- an additional electric heater or
- a fuel-driven additional heater<sup>2</sup>.

### Electric additional heater

The heater cannot be controlled manually but is instead activated automatically after the engine has been started in outside temperatures below 9 °C and is switched off after the set passenger compartment temperature has been reached.

### Fuel-driven additional heater

The heater starts automatically when extra heat is required when the engine is running.


The heater is switched off automatically when the correct temperature is reached or when the engine is switched off.

#### NOTE

When the auxiliary heater is active there may be smoke from underneath the car, which is perfectly normal.

### Auto mode or shutdown

The additional heater's automatic start sequence can be switched off if required.

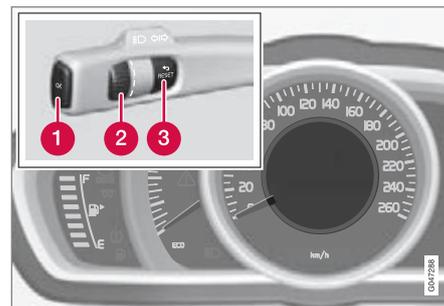


Information display (analogue combined instrument panel) and controls for menu navigation.

<sup>1</sup> An authorised Volvo dealer has information regarding the geographical areas concerned.

<sup>2</sup> For cars fitted with parking heaters, see page 226.



## Additional heater\*

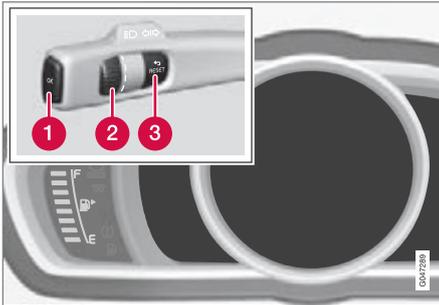

Information displays (digital combined instrument panel) and controls for menu navigation.

① **OK** button

② Thumbwheel

③ **RESET** button

1. Before starting the engine: Select key position **I**, see page 82.
2. Press **OK** to access the menu.
3. Scroll with the thumbwheel to **Additional heater**<sup>3</sup> or **Settings**<sup>4</sup> and select with **OK**.
4. Select one of the options **ON** or **OFF** using the thumbwheel and confirm with **OK**.

5. Exit the menu with **RESET**.

### **i** NOTE

The menu options are only visible in key position **I** - any adjustments must therefore be made before starting the engine.

<sup>3</sup> Analogue combined instrument panel.

<sup>4</sup> Digital combined instrument panel.

## Trip computer

### General

Checking and settings can be made immediately after the combined instrument panel is automatically illuminated in connection with unlocking. If none of the trip computer's controls are actuated within approx. 30 seconds after the driver's door has been opened then the instrument extinguishes, after which either key position II<sup>1</sup> or engine starting is required in order to operate the trip computer.

### NOTE

If a warning message appears when the trip computer is used then the message must first be acknowledged before the trip computer can be reactivated.

- Acknowledge the message by briefly pressing the indicator stalk **OK** button.


### Group menus

The trip computer has two different group menus:

- Functions
- Heading in combined instrument panel

The trip computer's **functions** or **headings** are each listed in an infinite loop.

### Combined instrument panel "Analog"

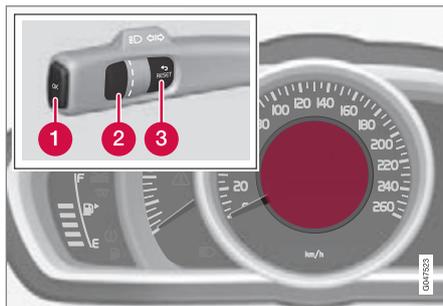

Information display and controls.

- 1 OK** - Opens the loop with the trip computer's functions + Activates the selected option.
- 2 Thumbwheel** - Opens the loop with the trip computer's headings + Scrolls through the options.
- 3 RESET** - Undoes, zeroes or backs out of a function after making a selection.

### Functions

Proceed as follows to open and check/adjust functions:

1. To ensure that no control is in the middle of a sequence - "Reset" them first with 2 presses on **RESET**.
2. Press **OK** - the loop with all functions opens.
3. Browse through the functions with the **thumbwheel** and select/confirm with **OK**.
4. Finish by pressing **RESET** twice after completed checking/ adjustment.

The different functions of the trip computer are listed in the following table:

<sup>1</sup> For information on key positions - see page 81.



## Trip computer

Functions	Information
<b>Digital speed</b> - km/h - mph - No display	Shows the car's speed digitally in the centre of the combined instrument panel: <ul style="list-style-type: none"> <li>• Open with <b>OK</b>, select with the <b>thumbwheel</b>, confirm with <b>OK</b> and back out with <b>ENTER</b>.</li> </ul>
<b>Parking heater*</b> - Direct start - Timer 1 - leads to the menu for selecting time. - Timer 2 - leads to the menu for selecting time.	For a description of programming the timer, see page 226.
<b>Additional heater*</b> - <b>Auto On</b> - <b>Off</b>	For more information, see page 230.
<b>TC options</b> - Distance to empty tank - Fuel consumption Average speed Trip meter <b>T1 and total dist.</b> Trip meter <b>T2 and total dist.</b>	Here you can select/activate the options that you want to be available as selectable headings in the trip computer. The symbols for the items already selected are WHITE with a "tick" - others are GREY and have no "tick": <ol style="list-style-type: none"> <li>1. Open the function with <b>OK</b>, scroll through the symbols for the options with the <b>thumbwheel</b> and select/stop on the desired symbol.</li> <li>2. Confirm with <b>OK</b> - the symbol changes colour from GREY to WHITE and is marked with a "tick".</li> <li>3. Continue to select the function symbols with the <b>thumbwheel</b> or finish with <b>RESET</b>.</li> </ol>
<b>Service status</b>	Shows the number of months and the distance until the next service.



## Trip computer

Functions	Information
Oil level <sup>A</sup>	For more information, see page 341.
Messages (##)	For more information, see page 205.

<sup>A</sup> Certain engines.

### Headings

One of the headings in the following table can be selected for constant display in the combined instrument panel. Proceed as follows to determine which:

1. To ensure that no control is in the middle of a sequence - "Reset" them first with 2 presses on **RESET**.
2. Turn the **thumbwheel** - selectable headings for the trip computer are shown in a loop.
3. Stop on desired heading.

Trip computer heading in combined instrument panel	Information
Trip meter T1 and total dist.	<ul style="list-style-type: none"> <li>• Long press on <b>RESET</b> resets trip meter T1.</li> </ul>
Trip meter T2 and total dist.	<ul style="list-style-type: none"> <li>• Long press on <b>RESET</b> resets trip meter T2.</li> </ul>
Distance to empty	For more information - see page 238, "Distance to empty tank".
Fuel consumption	Current consumption.
Average speed	<ul style="list-style-type: none"> <li>• Long press on <b>RESET</b> resets <b>Average speed</b>.</li> </ul>
No trip computer information.	This option shows a blank display - it also marks the beginning/end of the loop.

The combined instrument panel's trip computer can be changed to another option at


any time during the journey. Proceed as follows:

- Turn the **thumbwheel** - stop on the desired heading.



## Trip computer

### Combined instrument panel "Digital"

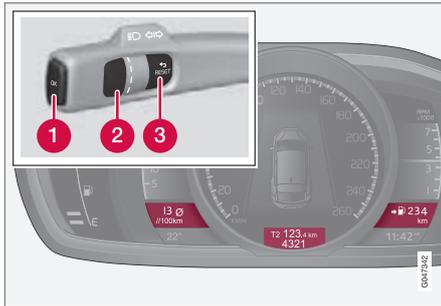

Information displays and controls.

- 1 **OK** - Opens the loop with the trip computer's functions + Activates the selected option.
- 2 **Thumbwheel** - Opens the loop with the trip computer's headings + Scrolls through the options.
- 3 **RESET** - Undoes, zeroes or backs out of a function after making a selection.

### Functions

Proceed as follows to open and check/adjust functions:

1. To ensure that no control is in the middle of a sequence - "Reset" them first with 2 presses on **RESET**.
2. Press **OK** - loop with all functions opens.
3. Browse through the functions with the **thumbwheel** and select/confirm with **OK**.
4. Finish by pressing **RESET** twice after completed checking/ adjustment.

The different functions of the trip computer are listed in the following table:



## Trip computer

Functions	Information
<b>Trip computer reset</b> Average Average speed	<b>Note</b> that this function does <b>not</b> reset both trip meters T1 and T2 - see the table in the section "Headings" page 237 or the heading "Resetting with Digital" page 238 for information on the process.
<b>Messages</b>	For more information, see page 205.
<b>Themes</b>	Combined instrument panel appearance is selected here, see page 72.
<b>Settings*</b>	Select <b>Auto On</b> or <b>Off</b> . For more information, see page 230.
<b>Contrast mode/Colour mode</b>	Adjusting the combined instrument panel's brightness and colour intensity.
<b>Parking heater*</b> – <b>Direct start</b> - Symbol Timer 1 - leads to the menu for selecting time. - Symbol Timer 2 - leads to the menu for selecting time.	For a description of programming the timer, see page 226.
<b>Service status</b>	Shows the number of months and the distance until the next service.
<b>Oil level<sup>A</sup></b>	For more information, see page 341.

<sup>A</sup> Certain engines.

**Trip computer****Headings**

Three trip computer headings can be displayed simultaneously - one in each "window" (see previous figure).

One of the heading combinations in the following table can be selected for constant dis-

play in the combined instrument panel. Proceed as follows to determine which:

1. To ensure that no control is in the middle of a sequence - "Reset" them first with 2 presses on **RESET**.
2. Turn the **thumbwheel** - selectable heading combinations are shown in a loop.
3. Stop on desired heading combination.

Heading combinations			Information
Average	Trip meter T1 + Meter reading	Average speed	<ul style="list-style-type: none"> <li>• Long press on <b>RESET</b> resets trip meter T1.</li> </ul>
Instantaneous	Trip meter T2 + Meter reading	Distance to empty tank	<ul style="list-style-type: none"> <li>• Long press on <b>RESET</b> resets trip meter T2.</li> </ul>
Instantaneous	Meter reading	kmh<>mph	kmh<>mph - see "Digital speed display" page 238.
	No trip computer information.		This option extinguishes all three trip computer displays - it also marks the beginning/end of the loop.

The combined instrument panel's heading combination for the trip computer can be changed to another option at any time during the journey. Proceed as follows:

- Turn the **thumbwheel** - stop on the desired heading.

**Supplementary information****Average**

Average fuel consumption is calculated from the last resetting.

**NOTE**

There may be a slight error in the reading if a fuel-driven heater\* has been used.

**Average speed**

The average speed is calculated for the driving distance driven since the last reset to zero.

**Instantaneous**

The information for current fuel consumption is updated continuously - approximately once per second. When the car is driven at low speed the consumption is shown per time unit - at a higher speed it is shown related to mileage.

\* Option/accessory, for more information, see Introduction.



## Trip computer

Different units (km/miles) can be selected for the display - see the heading "Change unit" page 238.

### Range - distance to empty tank

The trip computer shows the approximate distance that can be driven with the fuel quantity remaining in the tank.

No guaranteed range remains when the heading **Distance to empty** shows "----".

- In which case, refuel as soon as possible.

The calculation is based on the average fuel consumption over the last 30 km and the remaining driveable fuel quantity.

### NOTE

There may be a slight error in the reading if the driving style has been changed.

An economic driving style generally results in a longer driving distance. For more information on how fuel consumption can be influenced, see page 10.

### Digital speed display<sup>2</sup>

The speed is shown in the opposite unit (kmh/mph) in relation to the main instrument. If it is calibrated in mph then the trip com-

puter shows the corresponding speed in km/h and vice versa.

### Resetting with "Analog"

#### Trip meter and Average speed

With current trip computer heading - Trip meter T1, Trip meter T2 or Average speed - shown in the combined instrument panel:

- Give a long press on RESET **RESET** - selected heading is zeroed.

Each heading must be zeroed individually.

### Resetting with "Digital"

#### Trip meter

Turn with the **thumbwheel** to the heading combination containing the trip meter to be reset:

- Give a long press on RESET **RESET** - selected trip meter is zeroed.

#### Average speed & Average consumption

1. Select function **Trip computer reset** and activate with **OK**.
2. Select one of the following options with the **thumbwheel** and activate with **OK**:
  - l/100 km
  - km/h
  - Reset both

3. Finish with **RESET**.

### Change unit

To change unit (km/miles) for distance and speed - go to **MY CAR** → **Settings** →

**System options** → **Distance and fuel units**, see page 207.

### NOTE

In addition to the trip computer, these units are also changed at the same time in Volvo's GPS navigator RTI.

### Journey statistics\*


Information is stored about completed trips containing average fuel consumption and average speed, which can be viewed in the centre console's screen as a bar chart.

<sup>2</sup> Only for combined instrument panel "Digital".

\* Option/accessory, for more information, see Introduction.



## Function

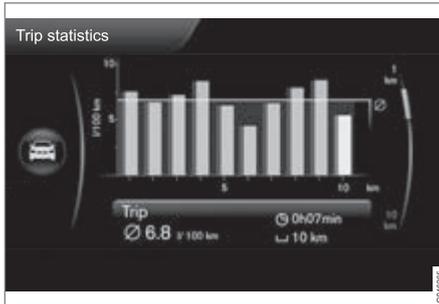

Trip statistics<sup>3</sup>.

Each bar symbolises 1 km or 10 km driven distance, depending on the scale selected - the bar at the far right shows the value for the current kilometre or 10 km.

The **TUNE** knob can be used to change the scale for each bar between 1 km and 10 km - the cursor at the far right changes position between up and down depending on the scale selected.

## Operation

A setting can be defined in the **MY CAR** menu system:

**MY CAR** → **My V40** → **Trip statistics**:

- **Start new trip** - **ENTER** is used to delete all previous statistics, back out of the menu by selecting **EXIT**.
- **Reset for every driving cycle** - check the box by selecting **ENTER** and back out of the menu by selecting **EXIT**.

With the "**Reset for every driving cycle**" option checked, all statistics are deleted automatically once driving is complete and the car has been stopped for 4 hours. The journey statistics start again from zero the next time the engine is started.

If a new drive cycle begins before 4 hours have passed, the current period has to be deleted manually first using the "**Start new trip**" option.

See also information on Eco guide on page 73.

<sup>3</sup> The figure is schematic - layout may vary depending on updated software and market.



### Adapting driving characteristics

#### Speed related power steering\*

Steering force increases with the speed of the car to give the driver enhanced sensitivity.

The steering is firmer and more immediate on motorways. Steering is light and requires no extra effort when parking and at low speed.


The driver can choose between three different levels of steering force for road responsiveness or steering sensitivity. Go to the menu system **MY CAR** and locate **Settings** → **Car settings** → **Steering wheel force** and select **Low**, **Medium** or **High**.

For a description of the menu system, see page 207. This menu cannot be accessed while the car is in motion.



## Comfort inside the passenger compartment

### Storage spaces

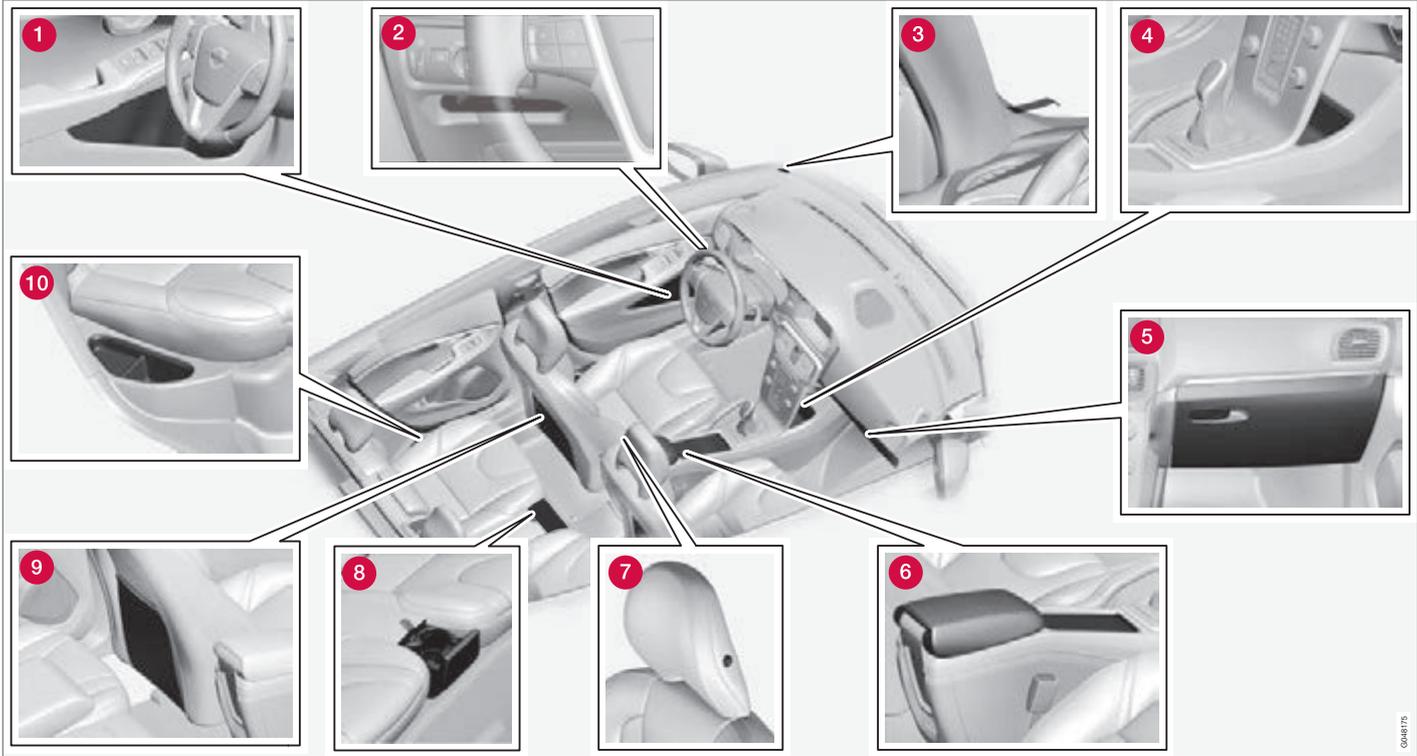

05

048175





## Comfort inside the passenger compartment

- 1 Storage compartment<sup>1</sup> in door panel
- 2 Storage compartment, driver's side
- 3 Ticket clip
- 4 Storage compartment
- 5 Glovebox
- 6 Storage compartment, cup holder
- 7 Jacket holder
- 8 Cup holder\* in rear seat
- 9 Storage pocket<sup>2</sup>
- 10 Storage compartment, rear seat

### WARNING

Keep loose objects such as mobile phones, cameras, remote controls for accessories, etc. in the glove compartment or other compartments. Otherwise they may injure people in the car in the event of sudden braking or a collision.

### Storage compartment, driver's side


#### WARNING

Do not keep any sharp objects in the compartment, or objects which protrude.

### Jacket holder

The jacket holder is only designed for light clothing.

### Tunnel console

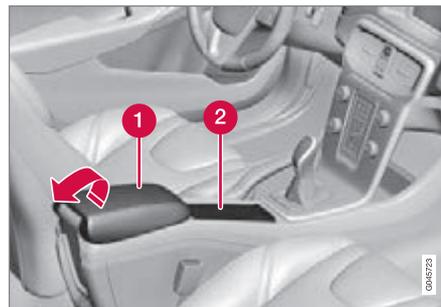

- 1 Storage compartment (e.g. for CDs) and USB\*/AUX input under the armrest.
- 2 Includes cup holder for driver and passenger. (If ashtray and cigarette lighter

are specified then there is a cigarette lighter in the 12 V socket for the front seat, see page 244, and a detachable ashtray in the cup holder.)

### Armrest

When closed, the armrest can be adjusted\* longitudinally.

### Cigarette lighter and ashtray\*

The ashtray in the tunnel console is detached by lifting the tray straight up.

Activate the lighter by pushing in the button. The button pops out when the lighter is hot. Pull out the lighter and light a cigarette on the heated coils.


<sup>1</sup> With ice scraper holder on the driver's side.

<sup>2</sup> Not applicable to textile upholstery.



## Comfort inside the passenger compartment

### Glovebox

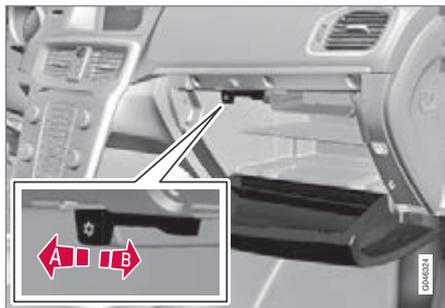

The owner's manual and maps can be kept here for example. There are also holders for pens on the inside of the lid. The glovebox can be locked\* using the key blade, see pages 48 and 58.

### Cooling<sup>3</sup>

The glovebox can also be used as a cooled area.

- A** Start cooling by moving the control in towards the passenger compartment to the end position.
- B** Switch off the cooling by moving the control forwards to the end position.

Cooling is active when the climate control system is active, i.e. when the key is in position II or the engine is running.

### Inlay mats\*

Volvo supplies specially manufactured inlay mats.

#### WARNING

Before setting off check that the inlay mat in the driver area is firmly affixed and secured in the pins in order to avoid getting caught adjacent to and under the pedals.

### Vanity mirror



*Vanity mirror with lighting.*


The light illuminates automatically when the cover is lifted.

<sup>3</sup> Applicable only to cars with ECC.



## Comfort inside the passenger compartment

### 12 V socket

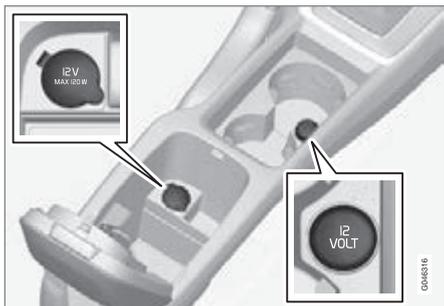

12 V socket in tunnel console, front seat.

The electrical sockets can be used for various accessories designed for 12 V, e.g. display screens, music players and mobile phones. For the sockets to supply current, the remote control key must be in at least key position I, see page 81.

### WARNING

Always leave the plug in the socket when the socket is not in use.

### NOTE

Optional equipment and accessories - e.g. display screens, music players and mobile phones - which are connected to one of the passenger compartment's 12V electrical sockets, could be activated by the climate control system, even when the remote control key has been removed or when the car is locked, for example, when the parking heater\* is activated at a preset time.

For this reason remove the plugs from the electrical sockets for optional equipment or accessories when not in use because the battery could be drained in the event of such an occurrence!

### IMPORTANT

Max. power takeoff is 10 A (120 W) in either socket.

### NOTE

The compressor for temporary emergency puncture repair has been tested and approved by Volvo. For information on the use of Volvo's recommended temporary emergency puncture repair (TMK), see page 330.

### Electrical socket in cargo area\*

For more information, see page 306.

\* Option/accessory, for more information, see Introduction.



General information on infotainment.....	248
Radio.....	259
Media player.....	266
External audio source via AUX/USB* input.....	270
Media Bluetooth®* .....	273
Bluetooth® handsfree*.....	276
Voice recognition* mobile phone.....	285
TV*.....	289
Remote control* .....	292



# 06

## INFOTAINMENT SYSTEM





## General information on infotainment

### General

The Infotainment system consists of a radio, media player, TV\* and the option to communicate with a mobile phone\*. Information is presented on a 5 or 7-inch\* screen in the upper section of the centre console. Functions can be controlled via buttons in the steering wheel, the centre console below the screen or via a remote control\*.

If the Infotainment System is active when the engine is switched off then it is automatically activated the next time the key is inserted into key position **I** or higher, and it continues with the same source (e.g. radio) as before the engine was switched off (the driver's door must be closed on cars with Keyless systems\*).

The infotainment system can be used for 15 minutes at a time without the remote control key being in the ignition switch by pressing the On/Off button.


When the car is being started the infotainment system is switched off temporarily and continues when the engine has started.

**NOTE**

Remove the remote control key from the ignition switch if the infotainment system is used when the engine is switched off. This is to avoid discharging the battery unnecessarily.

### Dolby, Pro Logic


Only applies to Premium Sound Multimedia.

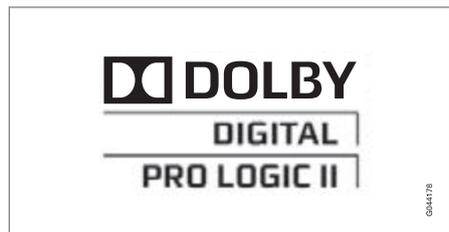

Made under license from Dolby Laboratories. Dolby, Pro Logic and the double-D symbol are trademarks of Dolby Laboratories.


### Audyssey MultEQ

Only applies to Premium Sound Multimedia.

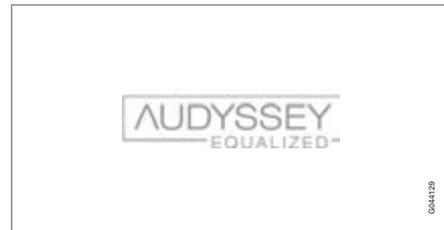

The Audyssey MultEQ system has been used in the development and tuning of the sound to ensure a world-class sound experience.

### Overview

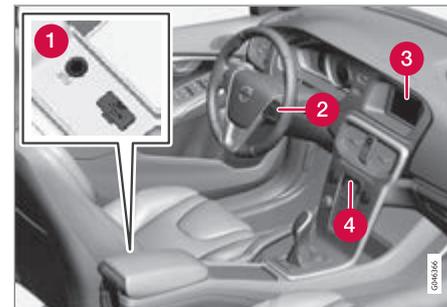

- 1 AUX (only applies to Performance) - and USB (does not apply to Performance) -




## General information on infotainment

inputs for external audio sources (e.g. iPod®).

- 2 Steering wheel keypad (with\*/without thumbwheel).
- 3 Display screen. The display screen is available in two sizes: 5 and 7-inch. The manual shows a 7-inch display screen.
- 4 Centre console control panel.

### Operating the system

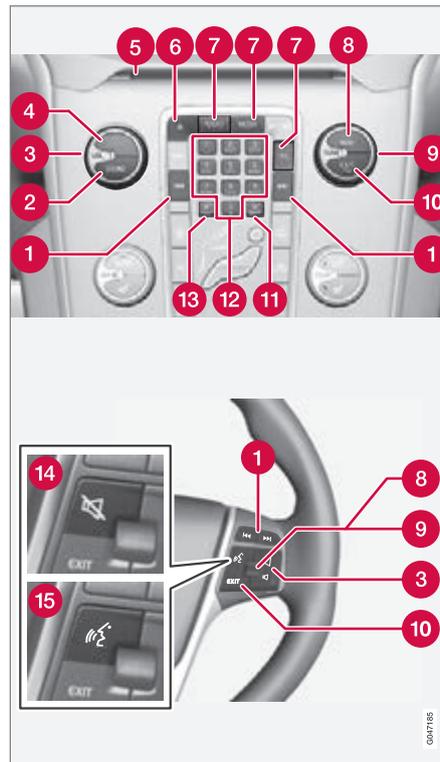

- 1 **Scroll/fast wind/search** - **Short press** scrolls between disc tracks, preset radio stations (does not apply to DAB) or chapters (only applies to DVD discs). **Long press** fast-winds disc tracks or searches for the next available radio station.
- 2 **SOUND** - press for access to audio settings (bass, treble, etc.). For more information, see page 253.
- 3 **VOL** - raise or lower volume.
- 4 **ON/OFF/MUTE** - **short press** starts the system and **long press** (until the screen is off) switches off. Note that the whole of the Sensus system (including navigation \* and phone functions\*) starts/switches off at the same time. Briefly press to mute the sound (MUTE) or restore the sound if it had been switched off.
- 5 Disc insert and eject slot.
- 6 Disc eject.
- 7 **Main sources** - press to select the main source (e.g. **RADIO**, **MEDIA**). Last active source is shown (e.g. **FM1**). A new source view is selected if the main source button is pressed while in **RADIO** or **MEDIA**. If you are in **TEL\*** or **NAV\*** and press the main source

\* Option/accessory, for more information, see Introduction.





### General information on infotainment

button then a shortcut menu is shown with commonly used menu options.

**8 OK/MENU** - press the thumbwheel in the steering wheel or the button in the centre console to accept a menu selection. If **OK/MENU** is pressed while in the normal view, a menu for the selected source opens (e.g. **RADIO** or **MEDIA**). Arrow to the right of the screen is shown when there are underlying menus.

**9 TUNE** - turn the thumbwheel in the steering wheel or the knob in the centre console to scroll among tracks/folders, radio and TV\* stations, phone contacts\* or to navigate among choices on the display screen.

**10 EXIT - Short press** leads upwards in the menu system, interrupts current function, interrupts/rejects phone calls or erases entered characters. **Long press** leads to normal view, or if you are in normal view to the highest menu level (main source view), from where you can reach the same main source buttons located in the centre console (7).

**11 INFO** - If more information than can be shown on the screen is available, press the **INFO** button to see the remaining information.

**12** Preset buttons, input of numbers and letters.

**13 FAV** - shortcut to a favourite setting. The button can be programmed for a commonly used function in AM, FM, etc. For more information, see page 252.


**14 MUTE** (cars without navigation) - press to deactivate the radio/media audio or restore the audio if it has been switched off.

**15 Voice recognition** (cars with navigation) - press to activate voice recognition (for Bluetooth®-connected mobile phone and navigation system\*).



## General information on infotainment

### Menus

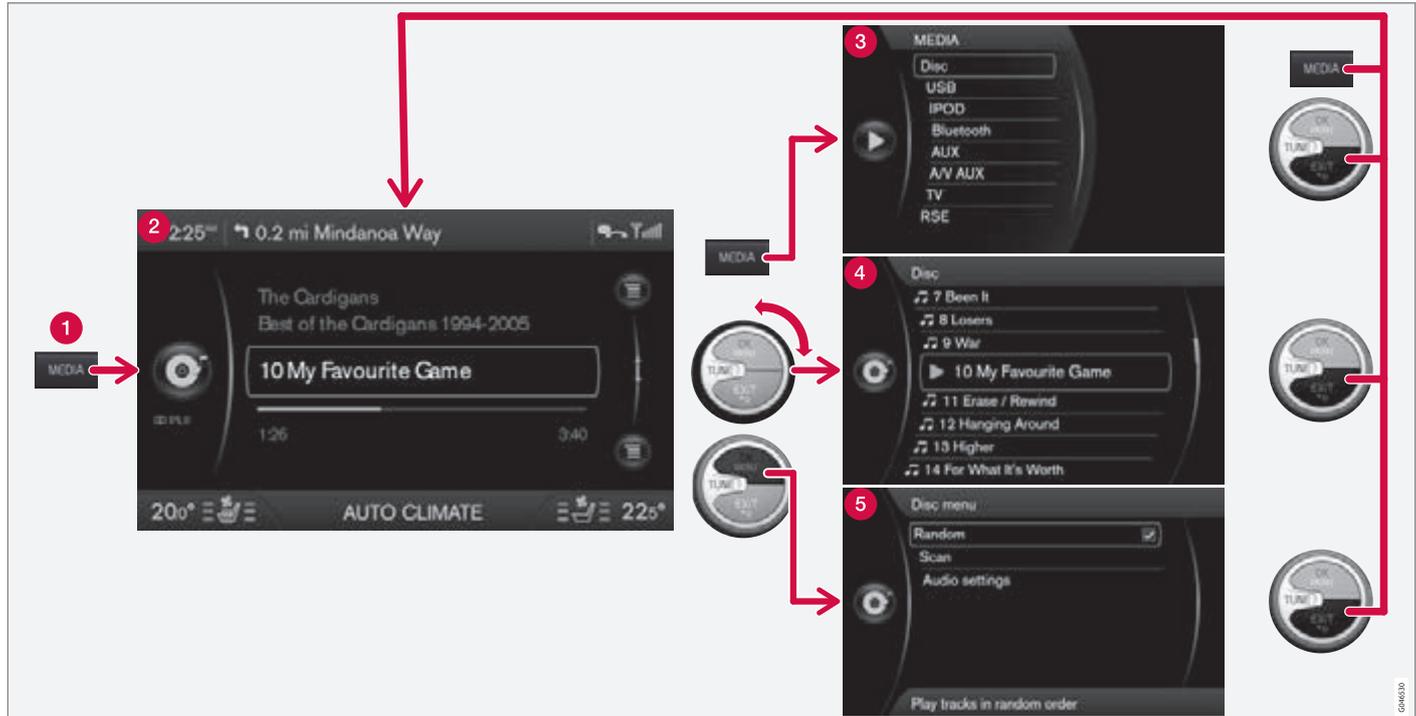

The example shows navigation to different functions when a disc is played back. (1) Main source button, (2) Normal view, (3) Shortcut/source menu, (4) Quick menu, (5) Source menu



## General information on infotainment

Select main source by pressing a main source button (1) (**RADIO**, **MEDIA**, **TEL**). To navigate through the source menus, use the controls **TUNE**, **OK/MENU**, **EXIT** or the main source button (1).

For Menu overview, see page 254.

### **i** NOTE

If the car is equipped with a steering wheel keypad with a thumbwheel\*, these can be used instead of the controls in the centre console (**TUNE**, **OK/MENU**, **EXIT**), see page 249.

### Menus and views in the display screen

The appearance depends on the source, equipment in the car, settings, etc.

**1 Main source button** - press to switch the main source or to show the Shortcut/Source menu in the active source.

**2 Normal view** - normal mode for the source.

**3 Shortcut/Source menu** - shows commonly used menu options in the main sources, e.g. **TEL** and **MEDIA** (accessed by pressing the active source's main source button (1)).

**4 Quick menu** - fast mode when **TUNE** is turned, e.g. for changing disc tracks, radio station, etc.

**5 Source menu** - for menu navigation (accessed by pressing **OK/MENU**).

### FAV - store a preset



The **FAV** button can be used to store functions that are used frequently so that the function can be started simply by pressing **FAV**. You can select a favourite (e.g. **Equalizer**) for each function as follows:

In **RADIO** mode:

- AM
- FM1/FM2
- DAB1\*/DAB2\*

In **MEDIA** mode:

- DISC
- USB\*
- iPod\*
- Bluetooth\*
- AUX
- TV\*

It is also possible to select and store a favourite for **MY CAR**, **CAM\*** and **NAV\***. Favourites can also be selected and stored under **MY CAR**. For more information on the menu system **MY CAR**, see page 207.

To store a function in the **FAV** button:

1. Select a main source (e.g. **RADIO**, **MEDIA**).
2. Select a wavelength or source (**AM**, **Disc**, etc.).
3. Press and hold the **FAV** button until the "favourites menu" is shown.
4. Turn **TUNE** to select an option from the list and press **OK/MENU** to save.
  - > When the main source (e.g. **RADIO**, **MEDIA**) is active the stored function is available via a short press on **FAV**.



## General information on infotainment

### General audio settings

Press **SOUND** to access the audio settings menu (**Bass**, **Treble**, etc.). Scroll forward with **SOUND** or **OK/MENU** to your selection (e.g. **Treble**).

Adjust the setting by turning **TUNE** and save the setting with **OK/MENU**.

Continue pressing **SOUND** or **OK/MENU** to access other options:

- **Surround**<sup>1</sup> - Can be set to the On/Off position. When On is selected, the system selects the setting for optimal sound reproduction. Normally DPLII and then appear in the display screen. If the recording is made with Dolby Digital technology then playback will take place with this setting, then appears in the display screen. When Off is selected, 3-channel stereo is available.
- **Bass** - Bass level.
- **Treble** - Treble level.
- **Fader** – Balance between the front and rear speakers.
- **Balance** – Balance between the left and right-hand speakers.

- **Subwoofer**<sup>\*1</sup> - Bass speaker level.
- **DPL II centre level**<sup>3</sup> **channel centre level**<sup>1</sup> - Volume for centre speaker.
- **DPL II surround level**<sup>1,2</sup> – Level for surround.

### Advanced audio settings

#### Equalizer<sup>3</sup>

The volume level can be adjusted separately for different wavelengths.

1. Press **OK/MENU** to access **Audio settings** and select **Equalizer**.
2. Select wavelength by turning **TUNE** and confirm with **OK/MENU**.
3. Adjust the audio settings by turning **TUNE** and confirm with **OK/MENU**. Continue in the same way with other wavelengths you want to change.
4. When you have finished with audio settings, press **EXIT** to confirm and return to normal view.

For general information on menu navigation, see page 251 and menu overview, see page 254.

#### Sound stage<sup>1</sup>

The sound experience can be optimised for the driver's seat, both front seats or the rear seat. If there are passengers in both the front and rear seats then the option recommended is; both front seats. The options can be selected under **Audio settings** → **Sound stage**.

For general information on menu navigation, see page 251 and menu overview, see page 254.

#### Audio volume and automatic volume control

The audio system compensates for disrupting noises in the passenger compartment by increasing the volume in relation to the speed of the car. The compensation level can be set to low, medium, high or off. Select the level under **Audio settings** → **Volume compensation**.

For general information on menu navigation, see page 251 and menu overview, see page 254.

<sup>1</sup> Only Premium Sound Multimedia.

<sup>2</sup> Only when Surround is activated.

<sup>3</sup> Not Performance.



## General information on infotainment

### External audio source audio volume

If an external audio source (e.g. an MP3 player or iPod®) is connected to the AUX input then the audio source that is connected can have a different volume than the audio system's internal volume (e.g. radio). Correct this by adjusting the volume of the input:

1. Press the **MEDIA** button and turn **TUNE** to **AUX** and wait a few seconds or press **OK/MENU**.
2. Press **OK/MENU** and then turn **TUNE** to **AUX input volume**. Confirm with **OK/MENU**.
3. Turn **TUNE** to adjust the volume for the AUX input.

### NOTE

If the external audio source's volume is too high or too low, the quality of the sound may deteriorate. The audio quality may also be impaired if the player is charged while the infotainment system is in AUX mode. In which case, avoid charging the player via the 12 V socket.

### Optimum sound reproduction

The audio system is pre-calibrated for optimum sound reproduction by means of digital signal processing.

This calibration takes into account loudspeakers, amplifiers, passenger compartment acoustics, listener position etc. for each combination of car model and audio system.

There is also a dynamic calibration that takes into account the position of the volume control, radio reception and vehicle speed.

The controls explained in these operating instructions, e.g. **Bass**, **Treble** and **Equalizer**, are only intended for the user to be able to adapt the sound reproduction according to personal taste.

### Menu overview

The main sources **RADIO**, **MEDIA** and **TEL** contain the following menus. For information about menu navigation, see page 251.

#### Menus RADIO

##### Main menu AM

<b>Show presets</b>	p.260
See footnote <sup>A</sup>	
<b>Scan</b>	p.263
<b>Audio settings</b>	p.253
See footnote <sup>B</sup>	

Sound stage	p.253
See footnote <sup>C</sup>	
Equalizer	p.253
See footnote <sup>D</sup>	
Volume compensation	p.253
Reset all audio settings	p.253

- <sup>A</sup> Only applies to High Performance Multimedia and Premium Sound Multimedia.  
<sup>B</sup> The menu options for audio settings are the same for all audio sources.  
<sup>C</sup> Only applies to Premium Sound Multimedia.  
<sup>D</sup> Does not apply to Performance.

#### Main menu FM1/FM2

<b>TP</b>	p.261
<b>Show radio text</b>	p.262
<b>Show presets</b>	p.260
See footnote <sup>A</sup>	
<b>Scan</b>	p.263
<b>News settings</b>	p.262



## General information on infotainment

<b>Advanced settings</b>	
REG	p.263
Alternative frequency	p.262
EON	p.261
Set TP favourite	p.261
PTY settings	p.262
Reset all FM settings	p.263
<b>Audio settings</b> See footnote <sup>B</sup>	p.253

<sup>A</sup> Only applies to High Performance Multimedia and Premium Sound Multimedia.

<sup>B</sup> For submenus, see "Main menu AM".

<b>Main menu DAB1*/DAB2*</b>	
<b>Ensemble learn</b>	p.263
<b>PTY filtering</b>	p.264

Turn off PTY filtering	p.264
<b>Show radio text</b>	p.260
<b>Show presets</b> See footnote <sup>A</sup>	p.264
<b>Scan</b>	p.264
<b>Advanced settings</b>	p.265
DAB linking	p.265
DAB band	p.265
Sub channels	p.265
Show PTY text	p.265
Reset all DAB settings	p.265
<b>Audio settings</b> See footnote <sup>B</sup>	p.253

<sup>A</sup> Only applies to High Performance Multimedia and Premium Sound Multimedia.

<sup>B</sup> For submenus, see "Main menu AM".

## Menus MEDIA

<b>Main menu CD Audio (Disc menu)</b>	
<b>Random</b>	p.268
<b>Scan</b>	p.268
<b>Audio settings</b> See footnote <sup>A</sup>	p.253

<sup>A</sup> For submenus, see "Main menu AM".

<b>Main menu CD/DVD<sup>A</sup> Data (Disc menu)</b>	
<b>Play</b>	p.267
<b>Pause</b>	
<b>Stop</b>	p.267
<b>Random</b>	p.268
<b>Repeat folder</b>	p.268
<b>Change subtitles</b>	p.267
<b>Change audio track</b>	p.267





## General information on infotainment

<b>Scan</b>	p.268
<b>Audio settings</b>	p.253
See footnote <sup>B</sup>	

<sup>A</sup> Only applies to High Performance Multimedia and Premium Sound Multimedia.

<sup>B</sup> For submenu, see "Main menu AM".

<b>Main menu DVD<sup>A</sup> Video (Disc menu)</b>	
<b>DVD disc menu</b>	p.266
<b>Play/Pause/Continue</b>	p.268
<b>Stop</b>	p.268
<b>Subtitles</b>	p.268
<b>Audio tracks</b>	p.268
<b>Advanced settings</b>	p.269
Angle	p.269

DivX <sup>®</sup> VOD code	p.269
<b>Audio settings</b>	p.253
See footnote <sup>B</sup>	

<sup>A</sup> Only applies to High Performance Multimedia and Premium Sound Multimedia.

<sup>B</sup> For submenu, see "Main menu AM".

<b>Main menu iPod<sup>A</sup></b>	
<b>Random</b>	p.268
<b>Scan</b>	p.268
<b>Audio settings</b>	p.253
See footnote <sup>B</sup>	

<sup>A</sup> Does not apply to Performance.

<sup>B</sup> For submenu, see "Main menu AM".

<b>Main menu USB<sup>A</sup></b>	
<b>Play</b>	p.271
<b>Pause</b>	
<b>Stop</b>	p.271
<b>Random</b>	p.268

<b>Repeat folder</b>	p.268
<b>Select USB device</b>	p.272
<b>Change subtitles</b>	p.271
<b>Change audio track</b>	p.271
<b>Scan</b>	p.268
<b>Audio settings</b>	p.253
See footnote <sup>B</sup>	

<sup>A</sup> Does not apply to Performance.

<sup>B</sup> For submenu, see "Main menu AM".

<b>Main menu Media Bluetooth<sup>A</sup></b>	
<b>Random</b>	p.275
<b>Change device</b>	p.274
<b>Remove Bluetooth device</b>	p.274
<b>Scan</b>	p.275



## General information on infotainment

<b>Bluetooth software version in car</b>	p.275
<b>Audio settings</b>	p.253
See footnote <sup>B</sup>	

<sup>A</sup> Does not apply to Performance.

<sup>B</sup> For submenus, see "Main menu AM".

<b>Main menu AUX</b>	
<b>AUX input volume</b>	p.254
<b>Audio settings</b>	p.253
See footnote <sup>A</sup>	

<sup>A</sup> For submenus, see "Main menu AM".

<b>Main menu TV*</b>	
<b>Select country</b>	p.290
<b>Reorganise presets</b>	p.290
<b>Autostore</b>	p.290

<b>Scan</b>	p.291
<b>Audio settings</b>	p.253
See footnote <sup>A</sup>	

<sup>A</sup> For submenus, see "Main menu AM".

<b>Pop-up menu<sup>A</sup>video and TV*</b>	
Press <b>OK/MENU</b> when a video file is being played back or TV* is being shown in order to access the pop-up menu.	
<b>Image settings</b>	p.269
<b>Source menu</b>	p.251
See footnote <sup>B</sup>	
<b>DVD disc menu</b>	p.268
See footnote <sup>C</sup>	
<b>DVD disc TOP menu<sup>C</sup></b>	p.268

<sup>A</sup> Only applies when playing back videos or displaying TV.

<sup>B</sup> What is shown in the pop-up menu for the source menu depends on what is being played back or displayed, it can be e.g. CD/DVD data menu or USB menu.

<sup>C</sup> Only applies to DVD video discs.

## Menu TEL

<b>Main menu Bluetooth® handsfree<sup>A</sup> (Phone menu)</b>	
<b>All calls</b>	p.279
All calls	p.279
Missed calls	p.279
Answered calls	p.279
Dialled calls	p.279
Call duration	p.279
<b>Phone book</b>	
Search	p.281
New contact	p.282
Speed dials	p.283
Receive vCard	p.283





## General information on infotainment

Memory status	p.283
Clear phone book	p.284
<b>Change phone</b>	p.278
<b>Remove Bluetooth device</b>	p.279
<b>Phone settings</b>	
Discoverable	p.277
Sounds and volume	p.279
Download phone book	p.280
Bluetooth software version in case of update	p.284
<b>Call options</b>	
Auto answer	p.279

Vicemail number	p.279
<b>Disconnect phone</b>	p.278

<sup>A</sup> Does not apply to Performance.



## General



Centre console, controls for radio functions.

- 1 **RADIO** button for selecting the wavelength (AM, FM1, FM2, DAB1\*, DAB2\*).
- 2 Station presets (0-9)
- 3 Confirm your selection or go to the radio menu by pressing **OK/MENU**.
- 4 Select the desired frequency/station or navigate in the radio menu by turning **TUNE**.
- 5 Hold in the button for next/previous available station. Short press for preset.

## NOTE

If the car is equipped with a steering wheel keypad\* and/or remote control\* then in many cases these can be used instead of the buttons in the centre console. For a description of the buttons in the steering wheel, see page 249. For a description of the remote control, see page 292.

## Menus

The menus in **RADIO** are controlled from the centre console and the steering wheel keypad\*. For general information on menu navigation, see page 251 and menu overview, see page 254.

## Radio AM/FM

### Tuning

## NOTE

The reception is dependent both on how good the signal strength and signal quality are. The transmission may be disturbed by various factors such as tall buildings or the transmitter being far away. Coverage level can also vary depending on where in the country you are located.

## Automatic tuning

1. Press **RADIO**, turn **TUNE** until the desired wavelength (**AM**, **FM1** etc.) is shown, press **OK/MENU**.
2. Hold in **◀** / **▶** in the centre console (or in the steering wheel keypad\*). The radio searches for the next/previous available station.

## Station list<sup>1</sup>

The radio automatically compiles a list of the strongest FM stations whose signals it is currently receiving. This enables you to find a station when you drive into an area where you do not know the radio stations and their frequencies.

To go to the list and select a station:

1. Select the desired wavelength (**FM1** or **FM2**).
2. Turn **TUNE** one step in either direction. This displays the list of all stations in the area. The currently tuned station is indicated with enlarged text in the list.
3. Turn **TUNE** again in either direction to select a station from the list.
4. Confirm your choice by pressing **OK/MENU**.

<sup>1</sup> Does not apply to Performance.



## Radio

### NOTE

- The list only shows the frequencies of stations that are currently being received, **not** a complete list of all radio frequencies on the selected wavelength.
- If the signal from the currently received station is weak, this may prevent the radio from updating the station list. If this occurs, press the **#INFO** button (while the station list is shown in the display screen) in order to change to manual tuning and set a frequency. If the station list is no longer shown, turn **TUNE** one step in either direction to show the list again, and press **#INFO** to switch.

The list disappears from the TV screen after a few seconds.

If the station list is no longer shown, turn **TUNE** one step in either direction and press the **#INFO** button in the centre console to change to manual tuning (or to return from manual tuning to the function for "Station list").

### Manual tuning

The preset from the factory is that the radio shows the station list of the strongest stations in the area when you turn **TUNE** (see the section "Station list", page 259). When the station list is shown, press the **#INFO** button in the centre console to change to manual tuning. This allows you to select a frequency from the list of all available radio frequencies in the selected wavelength. In other words, if turn **TUNE** one step in a manual search the frequency is changed from e.g. 93.3 to 93.4 MHz, etc.

To manually select a station:

1. Press the **RADIO** button, turn **TUNE** until the required frequency band (**AM**, **FM1** etc.) is displayed, press **OK/MENU**.
2. Turn **TUNE** to select a frequency.

### NOTE

The preset from the factory is that the radio automatically searches for the stations in the area where you are driving (see previous section "Station list" above).

But if you have changed over to manual tuning (by pressing the **#INFO** button in the centre console when the station list was shown), then the radio remains set in the function for manual tuning the next time you switch on the radio. To change back to the function for "Station list", turn **TUNE** one step (to show the complete list of stations) and press the button **#INFO**.

Note that if you press **#INFO** when the station list is not shown then **INFO** is activated. For more information on this function, see page 249.

### Preset

10 presets can be stored per wavelength (**AM**, **FM1** etc.).

The stored presets are selected using the preset buttons.

1. Tune into a station (see "Tuning", page 259).
2. Hold in one of the preset buttons for a few seconds, the sound disappears dur-



## Radio

ing this time and returns when the station is stored. The preset button can now be used.

A list of pre-selected channels can be shown<sup>2</sup> in the TV screen. The function is activated/deactivated in FM/AM mode under **FM menu** → **Show presets** or **AM menu** → **Show presets**.

### RDS functions

RDS (Radio Data System) links FM transmitters into a network. An FM transmitter in such a network sends information that gives an RDS radio the following functions:

- Automatically switches to a stronger transmitter if reception in the area is poor.
- Searches for programme type, such as traffic information or news.
- Receives text information on current radio programme.

#### NOTE

Some radio stations do not use RDS or only selected parts of its functionality.

If a required programme type is located the radio can switch stations interrupting the

audio source currently in use. For example, if the CD player is in use, it is paused. The interrupting transmission is played at a preset volume, see page 263. The radio returns to the previous audio source and volume when the set programme type is no longer broadcast.

The programme functions alarm (**ALARM!**), traffic information (**TP**), news (**NEWS**), and programme types (**PTY**) interrupt one another in order of priority, where alarm has the highest priority and programme types has the lowest. For additional settings of programming interruptions (**EON Distant** and **EON Local**), see the section "Enhanced Other Networks – EON" below. Press **EXIT** to return to the interrupted audio source, press the **OK/MENU** to clear the message.

### Alarm

This function is used to warn of serious accidents and catastrophes. The alarm cannot be temporarily interrupted or deactivated. The message **ALARM!** appears on the TV screen when an alarm message is transmitted.

### Traffic information – TP

This function allows traffic information sent within a set station's RDS network to break

through. The **TP** symbol indicates that the function is activated. If the preset station can send traffic information then this is shown by **TP** glowing brightly in the TV screen, otherwise **TP** will be grey.

- Activate/deactivate in FM mode under **FM menu** → **TP**.

### Enhanced Other Networks – EON

This function is useful in urban areas with many regional radio stations. It allows the distance between the car and the radio station transmitter to determine when programme functions should interrupt the current audio source.

- Activate/deactivate in FM mode by selecting one of the options under **FM menu** → **Advanced settings** → **EON**:
- **Local** – interrupts only if the radio station transmitter is close.
- **Distant**<sup>3</sup> – interrupts if the station transmitter is far away, even if there is a lot of static.

### TP from selected station/all stations

The radio can only interrupt for traffic information from the selected station or all stations within the RDS network.

<sup>2</sup> Only applies to High Performance Multimedia and Premium Sound Multimedia.

<sup>3</sup> Factory settings.



## Radio

- Go in FM mode to **FM menu** → **Advanced settings** → **Set TP favourite** to change.

### News

This function allows news broadcasts sent within a set station's RDS network to break through. The **NEWS** symbol indicates that the function is active.

- Activate/deactivate in FM mode under **FM menu** → **News settings** → **News**.

### News from selected station/all stations

The radio can only interrupt for news from the selected station or all stations in the RDS network.

- Go in FM mode to **FM menu** → **News settings** → **Set news favourite** to change.

### Programme types – PTY

The PTY function can be used to select one or more programme types, such as pop music and serious classic. The PTY symbol indicates that the function is active. This function allows programme types broadcast within a set station's RDS network to break through.

1. Activate in FM mode by first selecting the programme types under **FM menu** → **Advanced settings** → **PTY settings** → **Select PTY**.
2. Then the PTY function must be activated under **FM menu** → **Advanced settings** → **PTY settings** → **Receive traffic bulletins from other networks**.

An indicator is shown in the TV screen when PTY is activated.

Deactivation of the PTY function is performed in FM mode under **FM menu** → **Advanced settings** → **PTY settings** → **Receive traffic bulletins from other networks**. Selected programme types (PTY) are not reset.

Resetting and removing PTY are performed under **FM menu** → **Advanced settings** → **PTY settings** → **Select PTY** → **Clear all**.

### PTY search

This function searches the entire wavelength for the selected programme type.

1. In FM mode select one or more PTY under **FM menu** → **Advanced settings** → **PTY settings** → **Select PTY**.

2. Go to **FM menu** → **Advanced settings** → **PTY settings** → **Seek PTY**.

To finish searching, press **EXIT**.

- To continue searching for another broadcast of the selected programme types, press on **◀◀** or **▶▶**.

### Display of programme type

The programme type of the current station can be shown on the TV screen.

- Activate/deactivate in FM mode under **FM menu** → **Advanced settings** → **PTY settings** → **Show PTY text**.

### Radio text<sup>4</sup>

Some RDS stations transmit information on programme content, artists, etc. This information can be shown on the TV screen.

- Activate/deactivate in FM mode under **FM menu** → **Show radio text**.

### Automatic frequency update – AF

The function selects the strongest transmitter for the set station. In order to find a strong transmitter the function may, in exceptional cases, need to search the entire FM wavelength.

<sup>4</sup> Only cars with 7-inch screen



- Activate/deactivate in FM mode under **FM menu → Advanced settings → Alternative frequency.**

### Regional radio programmes – REG

This function causes the radio to continue with a regional transmitter even if its signal strength is low. The symbol **REG** shows that the function is active.

- Activate/deactivate in FM mode under **FM menu → Advanced settings → REG.**

### Resetting RDS functions

All radio settings can be reset to the original factory settings.

- The reset is carried out in FM mode under **FM menu → Advanced settings → Reset all FM settings.**

### Volume control, programme types

The interrupting programme types, e.g. **NEWS** or **TP**, are heard at the volume selected for each respective programme type. If the volume level is adjusted during the programme interruption, the new level is saved until the next programme interruption.

### Scan wavelength

The function automatically searches for available channels and takes into account any programme type filtering. When a station is

found, it is played for approx. 10 seconds before scanning is resumed. When a station is playing back it can be saved as a preset in the usual way, see the section Preset, page 260.

- To start scanning go in FM/AM mode to **FM menu → Scan** or **AM menu → Scan.**

#### NOTE

Scanning stops if a station is saved.

### Radio system - DAB\*

#### General

DAB (Digital Audio Broadcasting) is a digital broadcasting system for radio. This system supports DAB, DAB+ and DMB.

#### NOTE

Coverage for DAB is not available in all locations. If there is no coverage then the message **No reception** is shown in the display screen.

### Service and Ensemble

- **Service** - Channel, radio channel (only audio services are supported by the system).
- **Ensemble** - A collection of radio channels on the same frequency.

### Storing channel groups (Ensemble learn)

When the vehicle is moved to a new broadcasting area, programming of existing channel groups in the area may be necessary.

Programming of channel groups creates an updated list of all available channel groups. The list is not updated automatically.

Programming is carried out in the menu system in DAB mode under **DAB menu → Ensemble learn**. Programming can also take place as follows:

1. Turn **TUNE** one step in either direction.
  - > **Ensemble learn** is shown in the list of available channel groups.
2. Press **OK/MENU**.
  - > New programming is started.

Programming can be cancelled with **EXIT**.



## Radio

### Navigation in channel group list (Ensemble)

To navigate in and access the channel group list turn **TUNE**. The name of the Ensemble is shown in the upper part of the TV screen. When switching to the new Ensemble the name changes to the new one.

- **Service** - Shows channels irrespective of the channel group to which they are allocated. The list can also be filtered using the selection of programme type (**PTY filtering**), see below.

### Scanning

The function automatically searches the current wavelength for strong stations. When a station is found, it is played for approx. 10 seconds before scanning is resumed. When a station is playing back it is saved as a preset in the usual way. For more information on presets, see "Preset" below.

- Go in DAB mode to **DAB menu** → **Scan** to start scanning.

#### NOTE

Scanning stops if a station is saved.

Scanning can also be selected in DAB-PTY mode. In which case only channels of the pre-selected programme type are played.

### Programme type (PTY)

Various types of radio programmes can be selected using the programme type function. There are a number of different programme types which also include different programme categories. After selecting a programme type, navigation only takes place within the channels that are broadcasting that type.

Programme type is selected in DAB mode under **DAB menu** → **PTY filtering**. Exit this mode as follows:

- Press **EXIT**.
  - > An indicator is shown in the TV screen when PTY is activated.

In certain cases DAB radio will exit PTY mode when DAB to DAB linking (see below) is implemented.

### Preset

10 station presets can be stored per wavelength. DAB has 2 memories for presets: **DAB1** and **DAB2**. Storage of presets is made by means of a long press on the desired preset button, for more information see

page 260. The stored presets are selected using the preset buttons.

A preset contains one channel but no sub-channels. If a subchannel is being played and a preset is saved then only the main channel is registered. This is because subchannels are temporary. At the next attempt to retrieve the preset, the channel which contained the subchannel will be played. The preset is not dependent on the channel list.

A list of pre-selected channels can be shown<sup>5</sup> in the TV screen. The function is activated/deactivated in DAB mode under **DAB menu** → **Show presets**.

#### NOTE

The audio system's DAB system does not support all functions in the DAB standard.

### Radio text

Some radio stations transmit information on programme content, artists, etc. This information is shown on the TV screen.

The function is deactivated/activated in DAB mode under **DAB menu** → **Show radio text**.

<sup>5</sup> Only applies to High Performance Multimedia and Premium Sound Multimedia

**i NOTE**

Only one of the functions "**Show radio text**" and "**Show presets**" can be activated at a time. If one of them is activated when the other is already activated, then the previously activated function is deactivated automatically. Both functions can be deactivated.

**Advanced settings****DAB to DAB link**

DAB to DAB linking means that the DAB radio can go from one channel with poor or no reception to the same channel in another channel group with better reception. There may be a certain delay when changing channel group. There may be a period of silence between the current channel no longer being available to the new channel becoming available.

The function can be activated/deactivated in DAB mode under **DAB menu** → **Advanced settings** → **DAB linking**.

**Wavelength**

DAB can be transmitted on two<sup>6</sup> wavelengths:

- **Band III** - covers most areas.
- **LBand** - available only in a few areas.

By selecting for example **Band III** on its own, channel programming takes place more quickly than if both **Band III** and **LBand** have been selected. It is not certain that all channel groups will be found. Wavelength selection does not affect the stored memories.

Wavelengths can be deactivated/activated in DAB mode under **DAB menu** → **Advanced settings** → **DAB band**.

**Subchannel**

Secondary components are usually named subchannels. These are temporary and can contain e.g. translations of the main programme into other languages.

If one or more subchannels are broadcast then the **V** symbol is shown to the left of the channel name in the TV screen. A subchannel is indicated by the **-** symbol appearing to the left of the channel name in the TV screen.

Press **▶▶** to access the subchannels.

Subchannels can only be accessed on the selected main channel and not on any other channel without selecting it.

Display of subchannels can be deactivated/activated in DAB mode under **DAB menu** → **Advanced settings** → **Sub channels**

**Programme type text**

Some radio stations broadcast information about programme type and programme category, for information on Programme types – PTY, see page 262. This information is shown on the TV screen.

The function is activated/deactivated in DAB mode under **DAB menu** → **Advanced settings** → **Show PTY text**.

**Resetting the DAB settings**

All DAB settings can be reset to the original factory settings.

- The reset is carried out in DAB mode under **DAB menu** → **Advanced settings** → **Reset all DAB settings**.

<sup>6</sup> Not all areas/countries use both wavelengths.




## Media player

### General

The media player can playback audio and video from CD/DVD\* discs and externally connected audio sources via the AUX/USB\* input or wirelessly stream audio files from external devices using Bluetooth®. Certain media players can show TV\* and have the option to communicate with a mobile phone (see page 276)\* via Bluetooth®.

### CD/DVD<sup>1</sup> functions

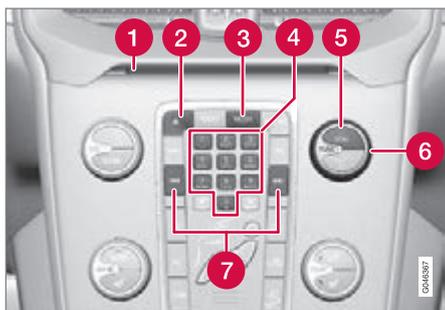

Centre console control panel.

- 1 Disc insert and eject slot
- 2 Disc eject

- 3 **MEDIA** button, activates last active media source. If you are already in a media source and press the **MEDIA** button then a shortcut menu is shown for commonly used menu options.
- 4 Input of numbers and letters.
- 5 Confirm your selection or go to the menu for the selected media source by pressing **OK/MENU**.
- 6 Select the disc tracks/folders, or navigate through menu options by turning **TUNE**.
- 7 Fast forward/reverse and change disc track or chapter<sup>2</sup>.

The media player supports and can play the following main types of discs and files:

- Pre-recorded CD discs (CD Audio).
- Burned CD discs with audio and/or video files<sup>1</sup>.
- Pre-recorded DVD video discs<sup>1</sup>.
- Burned DVD discs<sup>1</sup> with audio and/or video files.

For more information about the supported formats, see page 269.

**NOTE**

If the car is equipped with a steering wheel keypad\* and/or remote control\* then in many cases these can be used instead of the buttons in the centre console. For a description of the buttons in the steering wheel, see page 249. For a description of the remote control, see page 292.

### Menus

The menus in **MEDIA** are controlled from the centre console and the steering wheel keypad\*. For general information on menu navigation, see page 251 and menu overview, see page 254.

### Starting playback of a disc

Press the **MEDIA** button, turn **TUNE** until **Disc** is displayed, press **OK/MENU**. If there is a disc in the media player then the disc starts playing back automatically, otherwise **Insert disc** is shown in the TV screen. Then insert a disc, with text side up. The disc starts to play back automatically.

If a disc with audio/video files is inserted into the player then the disc's folder structure needs to be loaded. Depending on the quality of the disc and the quantity of information

<sup>1</sup> Only applies to High Performance Multimedia and Premium Sound Multimedia.

<sup>2</sup> Only applies to DVD discs.

**Media player**

there may be a certain delay before playback starts.

**Disc eject**

A disc remains in the ejected position for about 12 seconds, after which it is inserted back into the player for safety reasons.

**Pause**

When the volume is reduced entirely or MUTE is pressed, the media player is paused. When the volume is increased or MUTE is pressed again, the media player starts. It is also possible to pause via the menu system<sup>3</sup>, press **OK/MENU**, select **Play/Pause**.

**Playback and navigation****CD audio discs**

Turn **TUNE** to access the disc's playlist and navigate in the list. Use **OK/MENU** to confirm the selection of the disc track and start playback. Press **EXIT** to cancel and exit the playlist. A long press on **EXIT** leads to the playlist's root level.

Disc tracks can also be changed by pressing on **◀◀** / **▶▶** on the centre console or the steering wheel keypad\*.

**Burned discs audio/video files<sup>1</sup>**

Turn **TUNE** to access the disc's playlist/folder structure and navigate in the list/structure. Use **OK/MENU** to confirm either selection of subfolder or start of playback of the selected audio/video file. Press **EXIT** to either stop and exit the playlist or go up (back) in the folder structure. A long press on **EXIT** leads to the playlist's root level.

Audio/video files can also be changed by pressing **◀◀** / **▶▶** on the centre console or the steering wheel keypad\*.

Audio files have the symbol , video files<sup>1</sup> have the symbol  and folders have the symbol .

When playback of a file is complete the playback of the other files (of the same type) in that particular folder continues. Change<sup>4</sup> of folder takes place automatically when all the files in the current folder have been played back. The system automatically detects and changes setting when a disc containing only audio files or only video files is loaded into the media player and then plays back these files. However, the system does not change setting if a disc containing a mixture of audio

and video files is loaded into the media player, but instead the player continues to play back the previous file type.

**NOTE**

A video film is only shown when the car is stationary. When the car is moving at a speed of over about 8 km/h no picture is shown and **No visual media available while driving** appears on the display screen, although the audio is heard during this time. The picture is shown again as soon as the car's speed falls below about 6 km/h.

**NOTE**

Some audio files that are copy-protected by record companies or privately copied audio files cannot be loaded by the player.

**DVD video discs<sup>1</sup>**

For playback of DVD video discs, see page 268.

**Fast forward/reverse**

Hold in the buttons **◀◀** / **▶▶** to fast forward/rewind. Audio files are fast forwarded/rewound at one speed, while video files are

<sup>3</sup> Does not apply to CD Audio

<sup>1</sup> Only applies to High Performance Multimedia and Premium Sound Multimedia.

<sup>4</sup> If Repeat folder is activated then this does not take place.



## Media player

fast forwarded/rewound at several speeds. Repeatedly press the buttons / to increase the fast forward/rewind speed for video files. Release the button to return to viewing at normal speed.

### Scan<sup>5</sup>

This function plays the first ten seconds of each disc track/audio file. To scan:

1. Press **OK/MENU**
2. Turn **TUNE** to **Scan**
  - > The first 10 seconds of each disc track or audio file are played.
3. Cancel the scan with **EXIT**, the disc track or audio file being played back will continue playing.

### Random<sup>5</sup>

This function plays the tracks in random order. To listen to the tracks in random order:

1. Press **OK/MENU**
2. Turn **TUNE** to **Random**
3. Press **OK/MENU** to activate/deactivate the function.

Disc tracks/audio files can be changed by pressing / on the centre console or the steering wheel keypad\*.

### Repeat folder<sup>6</sup>

This function makes it possible to play files in a folder over and over again. When the last file has been played out, playback of the first file starts again.

1. Press **OK/MENU**
2. Turn **TUNE** to **Repeat folder**
3. Press **OK/MENU** to activate/deactivate the function.

### Playback of DVD video discs<sup>1</sup>

#### Playback

When playing back a DVD video disc a disc menu may appear on the display screen. The disc menu gives access to additional functions and settings, such as selecting subtitles, language and scene selection.

**NOTE**

A video film is only shown when the car is stationary. When the car is moving at a speed of over about 8 km/h no picture is shown and **No visual media available while driving** appears on the display screen, although the audio is heard during this time. The picture is shown again as soon as the car's speed falls below about 6 km/h.

### Navigation in the DVD video disc's menu



Navigation in the DVD video disc's menu is performed using the number keys in the centre console as illustrated above.

<sup>5</sup> Does not apply to DVD video discs.

<sup>6</sup> Only applies to audio/video files on burned discs or USB.

<sup>1</sup> Only applies to High Performance Multimedia and Premium Sound Multimedia.

**Media player****Changing chapter or title**

Turn **TUNE** to access the list of chapters and navigate through them (if the film is being played back then it is paused). Press **OK/MENU** to select the chapter, this also leads back to the original position (if the film was being played back then it is restarted). Press **EXIT** to access the title list.

Titles are selected in the title list by turning **TUNE** and the selection is confirmed with **OK/MENU**, this also leads back to the chapter list. Press **OK/MENU** to activate the selection and return to the start position. Use **EXIT** to cancel the selection and this leads back to the original position (without any selection being made).

The chapter can also be changed by pressing on **◀** / **▶** on the centre console or the steering wheel keypad\*.

**Advanced settings<sup>7</sup>****Angle**

If the DVD video disc supports it, the function can be used to choose from which camera position a particular scene should be shown. Go in disc mode to **Disc menu** → **Advanced settings** → **Angle**.

**DivX® Video On Demand**

The media player can be registered in order to play DivX VOD type files from burned discs or USB. The code for registration can be found in the menu system **MY CAR Settings** → **Information** → **DivX® VOD code**. For general information on menus, see under **MY CAR**, see page 207.

For more information visit [www.divx.com/vod](http://www.divx.com/vod).

**Picture settings<sup>7</sup>**

You can adjust the settings (when the car is stationary) for brightness and contrast.

1. Press **OK/MENU** and select **Image settings**, confirm with **OK/MENU**.
2. Turn **TUNE** to the adjustment option and confirm with **OK/MENU**.
3. Adjust the setting by turning **TUNE** and confirm with **OK/MENU**.

To return to the settings list, press the **OK/MENU** or **EXIT**.

The picture settings can be reset to factory settings with the **Reset** option.

**Compatible file formats**

The media player can play back a variety of file types and is compatible with the formats in the following table.

**NOTE**

Dual format, double-sided discs (DVD Plus, CD-DVD format) are thicker than regular CD discs and therefore playback cannot be guaranteed and malfunction may arise.

If a CD contains a mixture of MP3 and CDDA tracks, all MP3s will be ignored.

Audio format <sup>A</sup>	CD audio, mp3, wma
Audio format <sup>B</sup>	CD audio, mp3, wma, aac, m4a
Video format <sup>C</sup>	CD video, DVD video, divx, avi, asf

<sup>A</sup> Applies to Performance.

<sup>B</sup> Does not apply to Performance.

<sup>C</sup> Only applies to High Performance Multimedia and Premium Sound Multimedia.

<sup>7</sup> Applies to High Performance Multimedia and Premium Sound Multimedia.



## External audio source via AUX/USB\* input

### General



Connection points for external audio sources.

An external audio source, e.g. an iPod® or MP3 player, can be connected to the audio system via any of the connections in the centre console. An audio source connected to the USB input can then be handled<sup>1</sup> with the car's audio controls. A device connected via the AUX input cannot be controlled via the car.

There is a recess in the right-hand rear edge of the tunnel console where cables can be routed so that the hatch can be closed without cables being pinched.

### NOTE

If the car is equipped with a steering wheel keypad\* and/or remote control\* then in many cases these can be used instead of the buttons in the centre console. For a description of the buttons in the steering wheel, see page 249. For a description of the remote control, see page 292.

An iPod® or MP3 player with rechargeable batteries is recharged (when the ignition is on or the engine is running) if the device is plugged into the USB connection.

To connect the audio source:

1. Press **MEDIA**, turn **TUNE** to the required sound source **USB**, **iPod** or **AUX**, press **OK/MENU**.
  - > If USB is selected then **Connect USB** is shown in the TV screen.
2. Connect your audio source to one of the connections in the centre console's storage compartment (see previous illustration).

The text **Reading USB** is shown in the TV screen when the system is loading the storage media's file structure. Depending on the

file structure and number of files there may be some delay before loading is finished.

### NOTE

The system supports most iPod® models produced in 2005 or later.

### NOTE

To prevent damage to the USB connection, this is shut off if the USB connection is short-circuited or if a connected USB unit is taking too much power (this may happen if the unit connected does not meet the USB standard). The USB connection is reactivated automatically the next time the ignition is turned on, unless the fault persists.

### Menus

The menus in **MEDIA** are controlled from the centre console and the steering wheel keypad\*. For general information on menu navigation, see page 251 and menu overview, see page 254.

<sup>1</sup> Only applies to the media source connected via the USB connection.

\* Option/accessory, for more information, see Introduction.



## External audio source via AUX/USB\* input

### Playback and navigation<sup>2</sup>

Turn **TUNE** to access the playlist/folder structure and navigate in the list/structure. Use **OK/MENU** to either confirm selection of sub-folder or start of playback of the selected audio/video file. Press **EXIT** to either stop and exit the playlist or go up (back) in the folder structure. A long press on **EXIT** leads to the playlist's root level.

Audio/video files can also be changed by pressing  /  on the centre console or the steering wheel keypad\*.

Audio files have the symbol  , video files<sup>3</sup> have the symbol  and folders have the symbol .

When playback of a file is complete the playback of the other files (of the same type) in that particular folder continues. Change<sup>4</sup> of folder takes place automatically when all the files in the current folder have been played back. The system automatically detects and changes setting when a device containing only audio files or only video files is connected to the USB port and then it plays back

these files. However, the system does not change setting if a device containing a mixture of audio and video files is connected to the USB port, but instead the player continues to play back the previous file type.

### Fast forward/reverse<sup>2</sup>

See page 267.

### Scan<sup>2</sup>

See page 268.

### Random<sup>2</sup>

See page 268.

### Search function<sup>2</sup>

The keypad on the control panel in the centre console can be used to find a filename in the current folder.

The search function is accessed either by turning **TUNE** (to access the folder structure) or by pressing one of the letter keys. As a letter or character in a search string is entered you get closer to your search target.

Start playback of a file by pressing **OK/MENU**.

### Repeat folder<sup>5</sup>

See page 268.

### Pause

When the volume is reduced entirely or MUTE is pressed, the media player is paused. When the volume is increased or MUTE is pressed again, the media player starts. It is also possible to pause via the menu system<sup>6</sup>, press **OK/MENU**, select **Play/Pause**.

### Audio sources

#### USB memory

To facilitate the use of a USB memory stick, only store music files on it. It takes a lot longer for the system to load storage media that contains anything other than compatible music files.

<sup>2</sup> Only applies to USB and iPod®.

<sup>3</sup> Applies to High Performance Multimedia and Premium Sound Multimedia.

<sup>4</sup> If Repeat folder is activated then this does not take place.

<sup>5</sup> Only applies to USB.

<sup>6</sup> Does not apply to iPod®



## 06 Infotainment system

### External audio source via AUX/USB\* input

#### NOTE

The system supports mobile media compliant with USB 2.0 and the FAT32 file system and can handle 1000 folders with a maximum of 254 subfolders/files in every folder. The top level, which can handle up to 1000 subfolders/files, is an exception to this.

#### NOTE

When using a longer model USB memory stick the use of a USB adapter cable is recommended. This is to avoid mechanical wear to the USB input and the connected USB memory stick.

#### iPod®

An iPod® is charged and supplied with power by the USB connection\* via the player's connection cable.

#### NOTE

The system only supports the playback of audio files from iPod®.

#### NOTE

When an iPod® is used as audio source, the car's infotainment system has a menu structure that is similar to the iPod® player's own menu structure.

#### USB hub

It is possible to connect a USB hub to the USB connection and thereby connect multiple USB devices simultaneously. Selection of USB device is made in **USB** mode under **USB menu** → **Select USB device**.

#### MP3 player

Many MP3 players have their own file systems that are not supported by the audio system. For use in the system, an MP3 player must be set in **USB Removable device/Mass Storage Device** mode.

#### Compatible file formats via the USB connection

Audio and video files in the following table are supported by the system for playback via the USB connection.

Audio format	mp3, wma, aac, m4a
Video format <sup>A</sup>	divx, avi, asf

<sup>A</sup> Only applies to High Performance Multimedia and Premium Sound Multimedia.



## Media Bluetooth®\*

### General

The car's media player is equipped with Bluetooth®<sup>1</sup> and can wirelessly play streaming audio files from external devices with Bluetooth®, such as mobile phones and PDAs. Navigation and control of the sound can be carried out via the centre console buttons or via the steering wheel keypad\*. In some external devices it is also possible to change tracks from the device.

To play back the audio the car's media player must first be set in **Bluetooth** mode.

When a mobile phone is connected to the car, it is also possible to remotely control a selection of the mobile phone's functions, see page 276. Switch between the main sources **TEL** and **MEDIA** to operate each one's functions.

### NOTE

The Bluetooth® media player must support the Audio/Video Remote Control Profile (AVRCP) and Advanced Audio Distribution Profile (A2DP). The player should use AVRCP version 1.3, A2DP 1.2. Otherwise some functions may not work.

Not all mobile phones and external media players available in the market are fully compatible with the Bluetooth® function in the car's media player. Volvo recommends that you contact an authorised Volvo dealer or visit [www.volvocars.com](http://www.volvocars.com) for information on compatible phones and external media players.

### NOTE

The car's media player can only play the audio files via the Bluetooth® function.

### Menus

The menus in **MEDIA** are controlled from the centre console and the steering wheel keypad\*. For general information on menu navigation, see page 251 and menu overview, see page 254.

### Overview



Centre console control panel.

- 1 **VOL** – volume.
- 2 **MEDIA** button. Last active source (e.g. iPod®) is activated automatically. If a source is activated and you press **MEDIA** then a shortcut menu is shown with commonly used menu options.
- 3 Confirm your selection or go to the menu by pressing **OK/MENU**.
- 4 Navigate in the menu by turning **TUNE**.

<sup>1</sup> Applies to High Performance, High Performance Multimedia and Premium Sound Multimedia.



## Media Bluetooth®\*

- 5 **EXIT** - leads up in the menu system, stops the function in progress.
- 6 **Short presses** are used to scroll between audio files. **Long presses** are used to fast forward and rewind audio files.

### NOTE

If the car is equipped with a steering wheel keypad\* and/or remote control\* then in many cases these can be used instead of the buttons in the centre console. For a description of the buttons in the steering wheel, see page 249. For a description of the remote control, see page 292.

### Getting started

#### Connect an external Bluetooth® device

A maximum of ten external devices can be registered. The connection is made in the same way as for the phone, see Connect an external Bluetooth® device, page 277.

#### Automatic connection

When the Bluetooth® function is active and the last external device connected is in range it is connected automatically. When the infotainment system searches for the last device connected its name is shown in the TV screen. To connect to another device, press

**EXIT**. Connect a new external device, see "Change to another external device" below.

#### Change to another external device

It is possible to change a connected device with another device if there are several devices in the car. However, the device must first have been paired, see "Connect an external Bluetooth® device" above. To change to another device:

1. Press **MEDIA**, turn **TUNE** until **Bluetooth** is displayed, press **OK/MENU**.
2. Check that the external device is searchable/visible via Bluetooth®, see the manual for the external device.
3. Press **OK/MENU**.
4. Turn **TUNE** to **Change device**, and confirm with **OK/MENU**.
  - > After a while, the external device's name is shown in the TV screen. If several external devices have been paired then these are also shown.
5. Select the device to be connected by turning **TUNE** and confirm with **OK/MENU**.
  - > Connection of the external device takes place.

Change audio file by pressing / on the centre console or the steering wheel keypad\*.

#### Disconnecting the device

Automatic disconnection takes place if the external device moves out of the infotainment system's range. For more information on connection, see page 274.

#### Remove the connected device

1. Press Bluetooth mode on **OK/MENU**.
2. Turn **TUNE** to **Remove Bluetooth device** and confirm with **OK/MENU**.
3. Select the device to be removed by turning **TUNE**, and confirm with **OK/MENU**.
  - > A prompt asking whether or not you want to remove the connection is shown in the TV screen.
4. Press **OK/MENU** to confirm.

**EXIT** cancels.

**Media Bluetooth®\*****Random<sup>2</sup>**

This function plays back the audio files on the external device in random order. Activate/deactivate the random function in Bluetooth mode under **Bluetooth menu** → **Random**.

Change audio file by pressing  /  on the centre console or the steering wheel keypad\*.

**Scanning of audio files in external device<sup>2</sup>**

This function play backs the first ten seconds of each audio file. Activate/deactivate the function in Bluetooth mode under **Bluetooth menu** → **Scan**.

Cancel scanning with **EXIT**.

**Version information Bluetooth®**

The car's current Bluetooth® version can be seen in Bluetooth mode under **Bluetooth menu** → **Bluetooth software version in car**.

<sup>2</sup> Not supported by all mobile phones.



## 06 Infotainment system

### Bluetooth® handsfree\*

#### General


A mobile phone equipped with Bluetooth® can be connected wirelessly to the Infotainment system<sup>1</sup>. The infotainment system then works handsfree, with the option to control a range of the mobile phone's functions remotely. The microphone used is located by the driver's sun visor (2). The mobile phone can be operated by its own keys irrespective of whether or not it is connected.

#### NOTE

Only a selection of mobile phones are fully compatible with the handsfree function. Volvo recommends that you seek assistance from an authorised Volvo dealer or visit [www.volvocars.com](http://www.volvocars.com) for information on compatible phones.

gation, see page 251 and menu overview, see page 254.


#### Overview

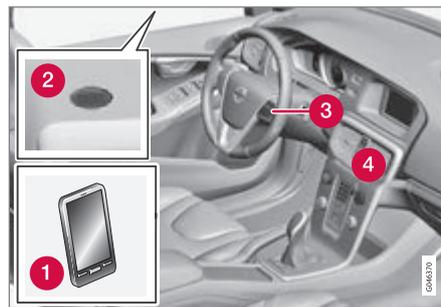

System overview

- 1 Mobile phone.
- 2 Microphone.
- 3 Steering wheel keypad.
- 4 Centre console control panel.

#### Phone functions, controls overview

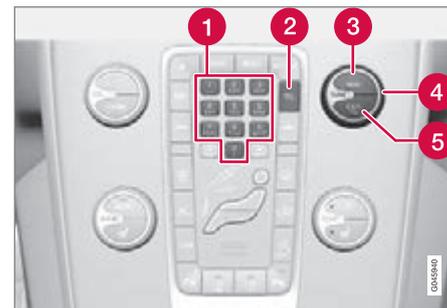

Centre console control panel.

- 1 Number and letter buttons
- 2 **TEL** button activates/searches last connected phone. If a phone is already connected, and **TEL** is pressed, a shortcut menu is shown with commonly used menu options for the phone.
- 3 Accept incoming calls, confirm your selection or go to the Phone menu by pressing **OK/MENU**.
- 4 **TUNE** - Turn in normal view to the right to access the phone book, and to the left for the call register for all calls; also used for

<sup>1</sup> Applies to High Performance, High Performance Multimedia and Premium Sound Multimedia.

\* Option/accessory, for more information, see Introduction.



## Bluetooth® handsfree\*

navigation among the options on the TV screen.

- 5 EXIT** - Cancels/rejects phone calls, deletes input characters, leads up in the menu system and cancels the current function.

### **i** NOTE

If the car is equipped with a steering wheel keypad\* and/or remote control\* then in many cases these can be used instead of the buttons in the centre console. For a description of the buttons in the steering wheel, see page 249. For a description of the remote control, see page 292.

## Remember

### Activate

A short press on **TEL** activates/searches last connected phone. If a phone is already connected, and **TEL** is pressed, a shortcut menu is shown with commonly used menu options for the phone. The  symbol indicates that a phone is connected.

### Connect an external Bluetooth® device

A maximum of ten external devices can be registered. Registration is performed once per device. After registration the device no

longer needs to be activated as visible/searchable.


### **i** NOTE

If the phone's operating system is updated then it is possible that the registration of the phone is interrupted. In which case, disconnect the phone, see page 279 and then reconnect it, see page 277.

It is possible to have two Bluetooth® devices connected simultaneously. One phone and one media device, which it is possible to switch between, see page 278 or see page 274. It is also possible to use the phone while streaming audio files from a connected device.

Connecting an external device takes place in different ways depending on whether or not the device has been connected previously. The connection options below presume that this is the first time the device is being connected and that no other device is connected.

There are two possible ways of connecting devices, either search for the external device from the car, or search for the car from the external device. If one option does not work then try with the other.

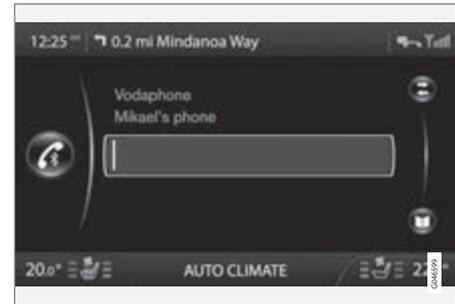

*Example of normal view for phone.*

If you are not already in the normal view, press **TEL** in the centre console.

**Alternative 1** - search for the external device via the car's menu system

1. Make the external device searchable/visible via Bluetooth®, see the external device's manual or [www.volvocars.com](http://www.volvocars.com).
2. Press **OK/MENU** and follow the instructions on the TV screen.
  - > The external device is now connected to the car and can be controlled from the car.

If connection failed, press **EXIT** twice and connect the device as described under Alternative 2.

\* Option/accessory, for more information, see Introduction.



## Bluetooth® handsfree\*

**Alternative 2** - Search for the car with the Bluetooth® function of the external device.

1. Make the car searchable/visible via Bluetooth®. Turn **TUNE** to **Phone settings**, confirm with **OK/MENU**, select **Discoverable** and confirm with **OK/MENU**.
2. Select **My Volvo Car** on the screen of the external device and follow the instructions.
3. Enter a PIN code in the external device and then select to connect.
4. Press **OK/MENU** and enter the same PIN code via the car keypad in the centre console.

Once the external device is connected, its Bluetooth® name appears on the car's TV screen and the unit can be controlled from the car.

### Automatic connection

When the handsfree function is active and the last mobile phone connected is in range it is connected automatically. If the last connected mobile phone is not available then the system will try to connect a mobile phone that was paired earlier. When the audio sys-

tem searches for the last phone connected its name is shown in the TV screen.

### Manual connection

If you want to change the connected mobile phone, go in phone mode to **Phone menu** → **Change phone**.

### Change to another external device

It is possible to change a connected device with another device if there are several devices in the car. However, the device must first have been registered to the car, see Connect an external Bluetooth® device. To change to another device:

1. Check that the external device is searchable/visible via Bluetooth®, see the manual for the external device.
2. Press **TEL** and then select **Change phone**.
  - > The car searches for previously connected devices. The external devices detected are specified with their respective Bluetooth® name in the TV screen.
3. Select the device to be connected by turning **TUNE** and confirm with **OK/MENU**.

> Connection of the external device takes place.

### To call

1. Make sure that the  symbol appears at the top of the TV screen and that the handsfree function is in phone mode.
2. Dial either the desired number or speed dial number, see page 283. Or in normal view turn **TUNE** to the right to access the phone book, and to the left for the call register for all calls. For information on the phone book, see page 280.
3. Press **OK/MENU**.

The call is interrupted with **EXIT**.

### Disconnecting the mobile phone

Automatic disconnection takes place if the mobile phone moves out of the audio system's range. The connection to the mobile phone can be manually broken in phone mode under **Phone menu** → **Disconnect phone**. For more information on connection, see page 277.

The handsfree function is deactivated when the engine is switched off and the door is opened<sup>2</sup>.

<sup>2</sup> Only Keyless Drive.

\* Option/accessory, for more information, see Introduction.

**Bluetooth® handsfree\***

When the mobile phone has been disconnected an ongoing call can be continued by using the mobile phone's built-in microphone and speaker.

**NOTE**

Even when your mobile phone has been manually disconnected, some mobile phones may automatically couple up to the last handsfree unit connected, e.g. when a new call begins.

**Remove the device**

A connected mobile phone can be deregistered and removed. This is performed in phone mode under **Phone menu** → **Remove Bluetooth device**.

**Making and receiving calls****Incoming call**

- Press **OK/MENU** to answer the call, even if the audio system is in e.g. **RADIO** or **MEDIA** mode.

Refuse or end with **EXIT**.

**Automatic answer**

The automatic answer function means that calls are accepted automatically.

- Activate/deactivate in phone mode under **Phone menu** → **Call options** → **Auto answer**.

**In call menu**

Press **OK/MENU** during an ongoing call to access the following functions:

- **Mute** - audio system microphone is muted.
- **Mobile phone** - the call is transferred from handsfree to the mobile phone. For some mobile phones the connection is interrupted. This is normal. The handsfree function asks if you want to reconnect.
- **Dial number** - option to call a third party using the number keys (current call set in standby).

**Call lists**

The call lists are copied to the handsfree function at each new connection and are then updated during the connection. In normal view, turn to the left with **TUNE** to see the call register for **All calls** .

In phone mode it is possible to see all the call lists under **Phone menu** → **All calls**:

- **All calls**
- **Missed calls**
- **Answered calls**

- **Dialled calls**
- **Call duration**

**NOTE**

Certain mobile phones show a list of the last dialled numbers in reverse order.

**Voice mailbox**

In normal view a speed dial number for the voice mailbox can be programmed in and then accessed later via a long press on **1**.

Voice mailbox number is changed in phone mode under **Phone menu** → **Call options** → **Vicemail number** → **Change number**. If there is no number stored then this menu can be reached with one long press on **1**.

**Audio settings****Phone call volume**

The phone call volume can only be changed during a call. Use the steering wheel keypad\* or turn the **VOL** control.

**Audio system volume**

Providing there is no ongoing call taking place, the audio system volume is controlled as usual by turning **VOL**.

If an audio source is active during an incoming call then it can be muted automatically.

\* Option/accessory, for more information, see Introduction.



## Bluetooth® handsfree\*

Activate/deactivate in phone mode under **Phone menu → Phone settings → Sounds and volume → Mute radio/media**.

### Ring volume

In phone mode go to **Phone menu → Phone settings → Sounds and volume → Ring volume** and adjust by turning **VOL**. Press **OK/MENU** to hear the audio volume. Press **EXIT** to save.

### Ring signals

The handsfree function has integrated ring signals that can be selected in phone mode under **Phone menu → Phone settings → Sounds and volume → Ring signals → Ring signal 1** etc.

#### NOTE

For some mobile phones, the ringtone on the phone connected will not be switched off when one of the inbuilt signals for the handsfree system is used.

In order to select the connected phone's ring signal<sup>3</sup>, go in phone mode to **Phone menu → Phone settings → Sounds and volume**

→ **Ring signals → Mobile phone ring signal**.

### Phone book

There are two phone books. These are merged into one in the car and are displayed as a single phone book in the car.

- The car downloads the mobile phone's phone book and only displays this phone book when the mobile phone from which this phone book was downloaded is connected.
- The car also has a built-in phone book. This contains all the contacts stored in the car irrespective of which phone was connected when saving them. These contacts are visible for all users, regardless of the mobile phone that is connected to the car. If a contact is saved in the car then the symbol  is shown in front of the contact in the phone book.

#### NOTE

Changes made from the car to a record in the mobile phone's telephone book will result in a new record in the car's telephone book, i.e. changes will not be saved to the phone. From the car, this will now look like you have double records, with different icons. Note also that when a short-cut number is saved or a change to a contact is made, this will result in a new record in the car's phone book.

All use of the phone book requires that the  symbol appears at the top of the TV screen and that the handsfree function is in phone mode.

The audio system stores a copy of the phone book from each paired mobile phone. The phone book can be copied automatically to the audio system during each connection.

- Activate/deactivate the function in phone mode under **Phone menu → Phone settings → Download phone book**.

If the phone book contains a ringing caller's contact information then this is shown in the TV screen.

<sup>3</sup> Not supported by all mobile phones.

\* Option/accessory, for more information, see Introduction.



## Bluetooth® handsfree\*

**Quick search for contacts**

In normal view turn **TUNE** to the right to obtain a list of contacts. Turn **TUNE** to select and press **OK/MENU** to call.

Under the name of the contact is the phone number that is selected by default. If the symbol > appears to the right of the contact then there are several phone numbers stored for the contact. Press **OK/MENU** to show the numbers. Change and dial a number other than that selected by default by turning **TUNE**. Press **OK/MENU** to dial.


Search in the list of contacts by using the centre console's keypad to key in the start of the contact's name (see "Character table keypad in centre console" for button functions).

The list of contacts can also be accessed from normal view by pressing and holding the button on the centre console's keypad with the letter that the contact searched for starts with. For example, a long press on the button for **6** gives instant access to that part of the list where the contacts with the letter **M** are located.

**Character table keypad in centre console**

Key	Function
1	Space . , - ? @ : ; / ( ) 1
2 ABC	A B C Å Ä Æ À Ç 2
3 DEF	D E F È É 3
4 GHI	G H I ì 4
5 JKL	J K L 5
6 MNO	M N O Ö Ø Ñ Ò 6
7 PQRS	P Q R S ß 7
8 TUV	T U V Ü Û 8
9 WXYZ	W X Y Z 9
* FAV	Shift between upper and lower case letter.

Key	Function
0 +	+ 0 p w
#INFO	# *

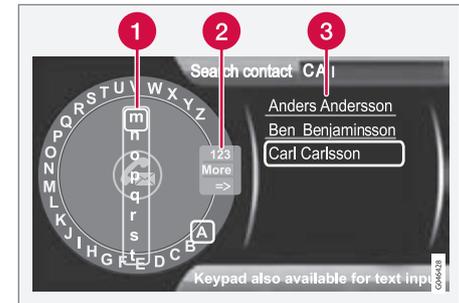**Searching for contacts**

Search contacts using the text wheel.

- 1 Character list
- 2 Changing the input mode (see table below)
- 3 Phone book



## 06 Infotainment system

### Bluetooth® handsfree\*

To search for or edit a contact, go in phone mode to **Phone menu** → **Phone book** → **Search**.

#### **i** NOTE

There is no text wheel for High Performance, so **TUNE** cannot be used there to input characters: only the digit and letter buttons on the control panel in the centre console can be used for this.

1. Turn<sup>4</sup> **TUNE** to the desired letter, press **OK/MENU** to confirm. The number and letter buttons on the control panel in the centre console can also be used.
2. Continue with the next letter and so on. The result of the search is shown in the phone book (3).
3. To change the input mode to numbers or special characters, or to go to the phone book, turn **TUNE** to one of the options (see explanation in the table below) in the list for changing the input mode (2), press **OK/MENU**.


123/ABC	Change between letters and numbers with <b>OK/MENU</b> .
More	Change to special characters with <b>OK/MENU</b> .
=>	Leads to the phone book (3). Turn <b>TUNE</b> to select a contact, press <b>OK/MENU</b> to see the saved numbers and other information.

A short press on **EXIT** deletes an input character. A long press on **EXIT** will clear all entered characters.

By pressing a number key in the centre console when the text wheel is shown (see illustration above), a new character list (1) appears in the TV screen. Continue repeatedly pressing the number key to the desired letter and then release. Continue with the next letter and so on. When a button is depressed the entry is confirmed when another button is depressed.

To enter a number, hold in the corresponding number key.

### New contact

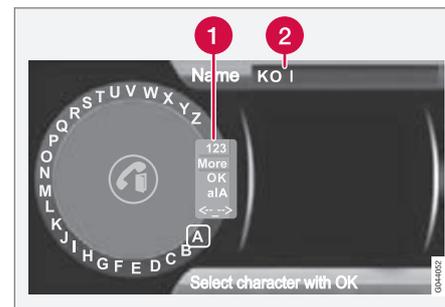

Entering letters for New contact.

- 1 Changing the input mode (see table below)
- 2 Input field

New contacts can be added in phone mode under **Phone menu** → **Phone book** → **New contact**.

#### **i** NOTE

There is no text wheel for High Performance, so **TUNE** cannot be used there to input characters: only the digit and letter buttons on the control panel in the centre console can be used for this.

<sup>4</sup> Only applies to High Performance Multimedia and Premium Sound Multimedia.

\* Option/accessory, for more information, see Introduction.



## Bluetooth® handsfree\*

1. When the **Name** row is selected, press **OK/MENU** to reach the input mode (illustration above).
2. Turn<sup>4</sup> **TUNE** to the desired letter, press **OK/MENU** to confirm. The number and letter buttons on the control panel in the centre console can also be used.
3. Continue with the next letter and so on. The name entered is shown in the input field (2) in the TV screen.
4. To change the input mode to numbers, special characters, change between uppercase/lowercase letters, etc., turn **TUNE** to one of the options (see explanation in the table below) in the list (1) and then press **OK/MENU**.

When the name has been fully entered, select **OK** in the list on the TV screen (1) and press **OK/MENU**. Now continue with the telephone number in the same way as above.

When the telephone number has been entered, press **OK/MENU** and select a telephone number type (**Mobile phone**, **Home**, **Work** or **General**). Press **OK/MENU** to confirm.

When all details have been filled in, select **Save contact** in the menu to save the contact.

123/ABC	Change between letters and numbers with <b>OK/MENU</b> .
More	Change to special characters with <b>OK/MENU</b> .
OK	Save and go back to <b>Add contact</b> with <b>OK/MENU</b> .
a A	Change between uppercase and lowercase letters with <b>OK/MENU</b> .
<- ->	Press <b>OK/MENU</b> , the cursor moves to the input field (2) at the top of the TV screen. The cursor can now be moved, with <b>TUNE</b> , to the appropriate place to e.g. insert new letters or delete with <b>EXIT</b> . To be able to insert new letters first go back to the input mode, by pressing <b>OK/MENU</b> .

**Speed dial numbers**

Use phone mode to add speed dial numbers under **Phone menu** → **Phone book** → **Speed dial**.

Dialling with speed dial numbers can be performed in phone mode using the number keys on the keypad in the centre console, by pressing a number key and then pressing **OK/MENU**. If there is no contact stored on the speed dial number then an option is shown to save a contact to the selected speed dial number.

**Receiving a vCard**

It is possible to receive a vCard to the car's phone book from other mobile phones (other than the one currently connected to the car). In order to allow this the car is set to visible mode for Bluetooth®. The function is activated in phone mode under **Phone menu** → **Phone book** → **Receive vCard**.

**Memory status**

Memory status of the car's phone book and the connected mobile phone's phone book can be seen in phone mode under **Phone menu** → **Phone book** → **Memory status**.

<sup>4</sup> Only applies to High Performance Multimedia and Premium Sound Multimedia.



### Bluetooth® handsfree\*

#### Delete phone book

The car's phone book can be deleted, this is carried out in phone mode under **Phone menu** → **Phone book** → **Clear phone book**.

#### NOTE

Deleting the car's telephone book only deletes contacts in the car's telephone book. Contacts in the mobile phone's phone book are not deleted.

#### Version information Bluetooth®

The car's current Bluetooth® version can be seen in phone mode under **Phone menu** → **Phone settings** → **Bluetooth software version in car**.



## Voice recognition\* mobile phone

### General

The infotainment system's voice recognition<sup>1</sup> allows the driver to voice-activate certain functions in a Bluetooth®-connected mobile phone or in Volvo's navigation system - RTI (Road and Traffic Information System).

### NOTE

- The information in this section describes the use of voice commands to control a **mobile phone connected using Bluetooth®**. For detailed information on using a mobile phone connected using Bluetooth® with the car's Infotainment system see page 276.
- The Volvo navigation system RTI (Road and Traffic Information System) has a separate user manual which contains more information on voice control and voice commands to control that system.

Voice commands offer convenience and help the driver to avoid being distracted, and instead concentrate on driving and focus attention on the road and traffic conditions.

### WARNING

The driver always holds overall responsibility for driving the vehicle in a safe manner and complying with all applicable rules of the road.

The voice recognition system allows the driver to voice-activate certain functions of a Bluetooth®-connected mobile phone and in Volvo's navigation system - RTI (Road and Traffic Information System), while the driver can keep his/her hands on the wheel at the same time. The input data are in dialogue form with spoken commands from the user and verbal replies from the system. The voice recognition system uses the same microphone as the Bluetooth® handsfree system (see illustration on page 276) and the voice recognition system's replies come via the car's speakers.

### Language



Language list.

Voice recognition is not possible for all languages. Languages available for voice recognition are marked with an icon in the language list - . Changing the language is performed in the menu system **MY CAR**, see page 209.

<sup>1</sup> Only applies to vehicles equipped with Volvo's navigation system - RTI (Road and Traffic Information System).



## Voice recognition\* mobile phone

### Remember



Steering wheel keypad.

- 1 Button for voice recognition

### To activate the system

Before voice commands to a mobile phone can be used the mobile phone must be paired and connected via Bluetooth® hands-free. If a telephone command is given and no mobile phone is paired, then the system will provide information about this. For information on pairing and connecting a mobile phone, see page 277.

- Press the button for voice recognition (1) in order to activate the system and initiate a dialogue with voice commands. The system will then display commonly used commands in the screen in the centre console.

Keep the following things in mind when you use the voice recognition system:

- For a command - speak after the tone, with normal voice at normal speed.
- Do not speak while the system is replying (the system cannot understand commands during this time).
- The car's doors and windows must be closed.
- Avoid background noise in the passenger compartment.

### NOTE

If the driver is unsure of which command to use, he (she) can say "Help" - the system then responds with a few different commands which can be used in the current situation.

Voice commands can be disabled by:

- saying "Cancel"
- not speaking
- a long press on the steering wheel button for Voice recognition
- Press **EXIT** or another main source button (e.g. **MEDIA**).

### Help functions for voice recognition

- Instructions:** A function that helps you get familiar with the system and the procedure for giving commands.
- Voice training:** A function that enables the voice recognition system to learn to know your voice and your accent. The function provides an opportunity to voice train two user profiles.

The help functions can be accessed by pressing the **MY CAR** button on the control panel in the centre console and then turning **TUNE** to the desired menu option.

### Instructions

The instructions can be started in two ways:

### NOTE

This instruction and voice training can only be started when the car is parked.

- Press the button for Voice recognition and say "Voice tutorial".
- Activate the instructions in the menu system **MY CAR** under **Settings** → **Voice settings** → **Voice tutorial**. For a description of the menu system, see page 207.

The instructions are divided into 3 lessons, which take around 5 minutes in total to complete. The system starts with the first lesson.

\* Option/accessory, for more information, see Introduction.

**Voice recognition\* mobile phone**

To skip a lesson and go to the next one, press the button for voice recognition and say "Next". Go back to the previous lesson by saying "Previous".

Exit the instructions by means of a long press on the button for voice recognition.

**Voice training**

The system displays up to fifteen phrases for you to say. Voice training can be started in the menu system **MY CAR** under **Settings** →

**Voice settings** → **Voice training**. Choose between **User 1** or **User 2**. For a description of the menu system, see page 207.

After voice training has been completed, remember to set your user profile under **Voice user setting**.

**Additional settings in MY CAR**

- **User setting** - Two user profiles can be set, the function is activated in the menu system **MY CAR** under **Settings** → **Voice settings** → **Voice user setting**. Choose between **User 1** or **User 2**. For a description of the menu system, see page 207.
- **Voice volume** - Can be changed in the menu system **MY CAR** under **Settings** → **Voice settings** → **Voice output volume**. For a description of the menu system, see page 207.

**Using voice commands**

The driver initiates a dialogue with the voice commands by pressing the button for voice recognition (see illustration on page 286).

Once a dialogue has been started, commonly used commands will be shown in the screen. Greyed-out text or text within brackets is not included in the spoken command.

When the driver becomes accustomed to the system, he/she can speed up the command dialogue and skip the prompts from the system, by briefly pressing the button for voice recognition.

**Commands can be given in several ways**

The command "Phone call contact" can be pronounced as e.g.:

- "Phone > Call contact" - Say "Phone", wait for the system's reply, and then continue by saying "Call contact."

or

- "Phone call contact" - Say the whole command in one sequence.

**Quick commands**

Quick commands for the phone can be found in the menu system **MY CAR** under **Settings** → **Voice settings** → **Voice command list** → **Phone commands** and **General**

**commands**. For a description of the menu system, see page 207.

**Dial a number**

The system understands the numbers **0** (zero) to **9** (nine). These numbers can be pronounced individually, in groups of several numbers at a time, or the whole number all at once. Numbers greater than **9** (nine) cannot be handled by the system, e.g. **10** (ten) or **11** (eleven) are not possible.

The following is an example of a dialogue with voice commands. The system's reply will vary depending on the situation.

**The user starts the dialogue by saying:**

Phone > call number

or

Phone call number

**System reply**

Number?

**User action**

Start saying the numbers (as individual units, i.e. six-eight-seven, etc.) in the phone number. If you say several numbers and pause, the system will repeat them, and then say "Continue".

Continue to say the numbers. When finished, finish the command by saying "Call".





### Voice recognition\* mobile phone

- You can also change the number by saying the commands "Correct" (which deletes the last spoken group of numbers) or "Delete" (which deletes the whole spoken phone number).
- If there are several contacts with similar names, they will be presented in the screen in the numbered rows and the system prompts you to select a row number.
- If there are more rows in the list than can be displayed simultaneously, saying "Down" allows you to scroll down in the list (and saying "Up" allows you to scroll up in the list).

#### Dialling from the call register

The following dialogue allows you to make a phone call from one of your mobile phone's call registers.

#### The user starts the dialogue by saying:

Phone > call from the call register

or

Phone call from the call register

Continue by responding to the system's prompts.

#### Call a contact

The following dialogue allows you to call your pre-defined contacts in the mobile phone.

#### The user starts the dialogue by saying:

Phone > call contact

or

Phone call contact

Continue by responding to the system's prompts.

Consider the following when you call a contact:

#### Calling voice mailbox

The following dialogue allows you to call your voice mailbox to check if you have received any messages. The phone number for your voice mailbox must be registered in the Bluetooth® function, see page 279.

#### The user starts the dialogue by saying:

Phone > call voice mailbox

or

Phone call voice mailbox

Continue by responding to the system's prompts.



TV\*

## General

### NOTE

This system only supports TV broadcasts in the countries that broadcast in MPEG-2 format or MPEG-4 format and follow the DVB-T standard. The system does not support analogue broadcasts.

### NOTE

The TV picture is only shown when the car is stationary. When the car is moving at a speed over about 6 km/h the picture disappears, **No visual media available while driving** appears on the display screen, although the audio is heard during this time. The picture reappears when the car has stopped.

### NOTE

The reception is dependent both on how good the signal strength and signal quality are. The transmission may be disturbed by various factors such as tall buildings or the TV transmitter being far away. Coverage level can also vary depending on where in the country you are located.


### IMPORTANT

A TV licence is required for this product in some countries.

## Menus

The menus in **MEDIA** are controlled from the centre console and the steering wheel keypad\*. For general information on menu navigation, see page 251 and menu overview, see page 254.

## Overview

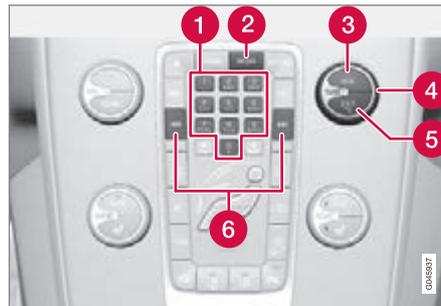

Centre console control panel.

- 1 Station presets, numeric input.
- 2 **MEDIA** button. Last active source (e.g. iPod® or TV) is activated. If a source is activated and you press **MEDIA** then a

shortcut menu is shown with commonly used menu options.

- 3 Confirm your selection or go to the menu by pressing **OK/MENU**.
- 4 Navigate in channel lists or menus by turning **TUNE**.
- 5 **EXIT** - leads up in the menu system, stops the function in progress.
- 6 The next available channel is shown by pressing **◀◀ / ▶▶**.

### NOTE

If the car is equipped with a steering wheel keypad\* and/or remote control\* then in many cases these can be used instead of the buttons in the centre console. For a description of the buttons in the steering wheel, see page 249. For a description of the remote control, see page 292.

## Watch TV

- Press **MEDIA**, turn **TUNE** until **TV** is shown in the display, press **OK/MENU**.
  - > A search starts and after a short while the most recently used channel is shown.

## Changing channel

It is possible to change channel as follows:

\* Option/accessory, for more information, see Introduction.



## TV\*

- Turn **TUNE**, a list of all available channels in the area is shown. If any of these channels is already saved as a preset then its preset number is shown to the right of the channel name. Continue turning **TUNE** to reach the desired channel and press **OK/MENU**.
- By pressing the preset buttons (0-9).
- Via a short press on the **◀◀** / **▶▶** buttons the next available channel in the area is shown.

### **i** NOTE

If the car has been moved within the country, for example, from one city to another, it is not certain that the presets are available at the new location as the frequency range may have changed. In which case, carry out a new search and save a new preset list, see the function "Save the available TV channels as presets", page 290.

### **i** NOTE

If no reception is available on the preset buttons, it may be because the car is at a location other than where the scan of TV channels was run, for example, if the car was driven from Germany to France. A new selection of country and a new search may then need to be carried out.

### Searching TV channels/Preset list

1. Press TV mode on **OK/MENU**.
2. Turn **TUNE** to **TV menu** and press **OK/MENU**.
3. Turn **TUNE** to **Select country** and press **OK/MENU**.
  - > If one or more countries have previously been selected then they are shown in a list.
4. Turn **TUNE** to either **Other countries** or one of the previously selected countries. Press **OK/MENU**.
  - > A list of all available countries is shown.
5. Turn **TUNE** to the desired country (e.g. Sweden) and press **OK/MENU**.
  - > An automatic scan for available TV channels starts, this scan takes a little while. During this time the figure for each channel found and added as a preset is shown. When the scan is complete a message is shown and the picture is shown. A preset list (max. 30 presets) has now been created and is available. To change channel, see page 289.

The scan and preset storage can be cancelled with **EXIT**.

### Channel management

The preset list can be edited. You can change the order of the channels that are shown in the preset list. A TV channel can have more than one place in the preset list. The TV channel positions can also vary in the preset list.

To change the order in the preset list, go in TV mode to **TV menu** → **Reorganise presets**.

1. Turn **TUNE** to the channel you want to move in the list and confirm with **OK/MENU**.
  - > The selected channel is highlighted.
2. Turn **TUNE** to the new location in the list and confirm with **OK/MENU**.
  - > The channels change places with each other.

After the preset channels (max. 30) come all the other channels available in the area. It is possible to move a channel up to a place in the preset list.

### Save the available TV channels as presets

If the car has been moved within the country, for example, from one city to another, it is not certain that the presets are available at the new location as the frequency range may



have changed. In which case, carry out another scan and save a new preset list.

1. Press TV mode on **OK/MENU**.
2. Turn **TUNE** to **TV menu** and press **OK/MENU**.
3. Turn **TUNE** to **Autostore** and press **OK/MENU**.

> An automatic scan for available TV channels starts, this scan takes a little while. During this time the figure for each channel found and added as a preset is shown. When the scan is complete a message is shown and the picture is shown. A preset list (max. 30 presets) has now been created and is available. To change channel, see page 289.

### Scanning the TV channels

This function automatically scans through the frequency range for all channels available in the area where you are. When a channel is found, it is shown for approx. 10 seconds before scanning is resumed. Scanning is stopped with **EXIT**, then the channel that you just watched continues to be shown. Scanning does not affect the preset list.

Activate scanning in TV mode under **TV menu** → **Scan**.

### Teletext

It is possible to read Teletext. Follow these steps:

1. Press the  button on the remote control.
2. Enter the page number (3 digits) with the number keys (0-9) to select page.
  - > The page is shown automatically.

Enter new page number, or press the remote control buttons  /  to go to the next page.

Return to TV screen with **EXIT** or by pressing the  button on the remote control.

It is also possible to control the teletext with the coloured buttons on the remote control.

### Information about the current programme

Press the **INFO** button in order to display the information about the current programme, the next programme and its start time. If the **INFO** button is pressed once more then additional information on the current programme can sometimes be displayed, such as start and end times and a brief description of the current programme. For more information on the **INFO** button, see page 249.

To return to the TV picture, wait several seconds or press **EXIT**.

### Picture settings

The settings for brightness and contrast can be adjusted. For more information, see page 269.

### The reception is lost

If the reception for the TV channel that is being shown disappears then the picture will freeze. Shortly after this a message appears informing that the reception has been lost for the current TV channel, and a new search for the channel continues. When the reception returns the display of the TV channel starts immediately. It is possible to change channel at any time when the message is shown.

If the message **Reception lost, searching** is shown then this is because the system has detected that there is no reception for all TV channels. One possible reason may be that a border has been crossed and that the system is set to the wrong country. In which case, change to the right country in accordance with "Searching TV channels/Preset list", see page 290.



## Remote control\*

### General



1 Corresponds to **TUNE** in the centre console.

The remote control can be used for all functions in the infotainment system. The remote control's buttons have the same functions as the buttons in the centre console or steering wheel keypad\*.

When using the remote control, first press the remote control's button  $L \begin{matrix} F \\ \text{INFO} \\ R \end{matrix}$  to position **F**. Then aim the remote control at the IR receiver, which is located to the right of the **INFO** button (see page 249) in the centre console.

### WARNING

Keep loose objects such as mobile phones, cameras, remote controls for accessories, etc. in the glove compartment or other compartments. Otherwise they may injure people in the car in the event of sudden braking or a collision.

### NOTE

Do not expose the remote control to direct sunlight (e.g. on the instrument panel) - otherwise problems may arise with the batteries.

### Functions

Key	Function
$L \begin{matrix} F \\ \text{INFO} \\ R \end{matrix}$	<b>F</b> = Front TV screen
<b>NAV</b>	Change to navigation*
<b>RADIO</b>	Change to radio source ( <b>AM</b> , <b>FM1</b> etc.)
<b>MEDIA</b>	Change to media source ( <b>Disc</b> , <b>TV*</b> etc.)
<b>TEL</b>	Change to Bluetooth® hands-free*
	Scroll/fast rewind, change track/song
	Play/pause
	Stop
	Scroll/fast forward, change track/song
<b>DVD MENU</b>	Menu
<b>EXIT</b>	To previous, cancels function, deletes input characters



## Remote control\*

Key	Function
	Navigate up/down
	Navigate right/left
<b>OK</b> MENU	Confirm selection or go to the menu system for the selected source
	Volume, decrease
	Volume, increase
0-9	Preset channels, number and letter input
<b>FAV</b> *	Shortcuts for favourite setting
<b>INFO</b> #	Information about the current programme, song, etc. Also used when there is more information available than can be shown in the TV screen
	Selection of language for soundtrack

Key	Function
	Subtitles, selection of language for text
	Teletext*, On/Off


### Replacing the battery in the remote control

#### NOTE

Battery life is normally 1-4 years and depends on how much the remote control is used.

The remote control is powered by four batteries of the AA/LR6 type.

Take along extra batteries for a long journey.

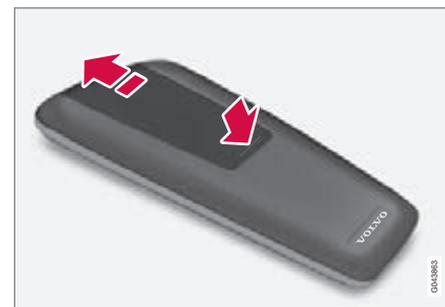

1. Push down the catch on the battery cover and slide the battery cover in the direction of the infrared lens.
2. Remove the used batteries, turn the new batteries in accordance with the symbols in the battery compartment and fit them.
3. Refit the cover.

#### NOTE

Be sure to dispose of the exhausted batteries in an environmentally safe manner.

Recommendations during driving.....	296
Refuelling.....	299
Fuel.....	301
Loading.....	304
Cargo area.....	307
Driving with a trailer.....	309
Towing and recovery.....	315



# 07

DURING YOUR JOURNEY





## Recommendations during driving

### General

#### Economical driving

Driving economically means driving smoothly while thinking ahead and adjusting your driving style and speed to the prevailing conditions.

- Drive in the highest gear possible, adapted to the current traffic situation and road - lower engine speeds result in lower fuel consumption.
- Avoid driving with open windows.
- Avoid sudden unnecessary acceleration and heavy braking.
- Remove unnecessary items from the car - the greater the load the higher the fuel consumption.
- Use engine braking to slow down, when it can take place without risk to other road users.
- A roof load and ski box increase air resistance, leading to higher fuel consumption - remove the load carriers when not in use.
- Do not run the engine to operating temperature at idling speed, but rather drive with a light load as soon as possible - a cold engine consumes more fuel than a warm one.
- Cars with manual transmission are started in 2nd gear (applies to cars with

up to 18-inch wheels) under normal conditions on flat ground.

For more information and further advice, see the pages 11 and 387.



#### WARNING

Never switch off the engine while moving, such as downhill, this deactivates important systems such as the power steering and brake servo.

#### Driving in water

The car can be driven through water at a maximum depth of 25 cm at a maximum speed of 10 km/h. Extra caution should be exercised when passing through flowing water.

During driving in water, maintain a low speed and do not stop the car. When the water has been passed, depress the brake pedal lightly and check that full brake function is achieved. Water and mud for example can make the brake linings wet resulting in delayed brake function.

- Clean the electric contacts of the electric engine block heater and trailer coupling after driving in water and mud.
- Do not let the car stand with water over the sills for any long period of time - this could cause electrical malfunctions.



#### IMPORTANT

Engine damage can occur if water enters the air filter.

In depths greater than 25 cm, water could enter the transmission. This reduces the lubricating ability of the oils and shortens the service life of these systems.

In the event of the engine stalling in water, do not try restart - tow the car from the water to a workshop - an authorised Volvo workshop is recommended. Risk of engine breakdown.

#### Engine, gearbox and cooling system

Under special conditions, for example hard driving in hilly terrain and hot climate, there is a risk that the engine and drive system may overheat - in particular with a heavy load.

For information about overheating when driving with a trailer, see page 310.

- Remove any auxiliary lamps from in front of the grille when driving in hot climates.
- If the temperature in the engine's cooling system is too high then a warning symbol is illuminated and a text message **High engine temp Stop safely** is shown in the combined instrument panel's information display - stop the car in a safe way and allow the engine to run at idling speed for several minutes in order to cool down.



## Recommendations during driving

- If the text message **High engine temp Stop engine** or **Coolant level low, Stop engine** is shown then the engine must be switched off after stopping the car.
- In the event of overheating in the gearbox a built-in protection function is activated, which is indicated by the combined instrument panel with a warning symbol and the text message **Transmission hot Reduce speed** or **Transmission hot Stop safely** - follow the recommendation given and lower the speed and stop the car in a safe way and allow the engine to run at idling speed for a few minutes in order to allow the gearbox to cool down.
- If the car overheats, the air conditioning may be switched off temporarily.
- Do not turn the engine off immediately you stop after a hard drive.

### NOTE

It is normal for the engine's cooling fan to operate for a time after the engine has been switched off.

### Open tailgate

#### WARNING

Do not drive with an open tailgate! Toxic exhaust fumes could be drawn into the car through the cargo area.

### Do not overload the battery

The electrical functions in the car load the battery to varying degrees. Avoid using the key position **II** when the engine is switched off. Instead use the **I** mode - which uses less power.

Also, be aware of different accessories that load the electrical system. Do not use functions which use a lot of power when the engine is switched off. Examples of such functions are:

- ventilation fan
- headlamps
- windscreen wiper
- audio system (high volume).

If the starter battery's voltage is low then the information display in the combined instrument panel shows the text **Low battery Power save mode**. The energy-saving function then shuts down certain functions or reduces certain functions such as the ventilation fan and/or audio system.

- In which case, charge the battery by starting the engine and then running it for at least 15 minutes - battery charging is more effective during driving than running the engine at idling speed while stationary.

### Before a long journey

- Check that the engine is working normally and that fuel consumption is normal.
- Make sure that there are no leaks (fuel, oil or other fluid).
- Check all bulbs and tyre tread depths.
- Carrying a warning triangle is a legal requirement in certain countries.

### Winter driving

Check the following in particular before the cold season:

- The engine coolant must contain at least 50% glycol. This mixture protects the engine against frost erosion down to approximately  $-35^{\circ}\text{C}$ . To achieve optimum antifreeze protection, different types of glycol must not be mixed.
- The fuel tank must be kept filled to prevent condensation.
- Engine oil viscosity is important. Oils with lower viscosity (thinner oils) facilitate starting in cold weather and also reduce fuel consumption while the engine is cold. For



### Recommendations during driving

more information on suitable oils, see page 383.

#### **IMPORTANT**

Low viscosity oil must not be used for hard driving or in hot weather.

- The condition of the battery and charge level must be inspected. Cold weather places great demands on the battery and its capacity is reduced by the cold.
- Use washer fluid to avoid ice forming in the washer fluid reservoir.

To achieve optimum roadholding Volvo recommends using winter tyres on all wheels if there is a risk of snow or ice.

#### **NOTE**

The use of winter tyres is a legal requirement in certain countries. Studded tyres are not permitted in all countries.

#### **Slippery driving conditions**


Practise driving on slippery surfaces under controlled conditions to learn how the car reacts.



## Refuelling

## Refuelling

## Opening/closing the fuel filler flap

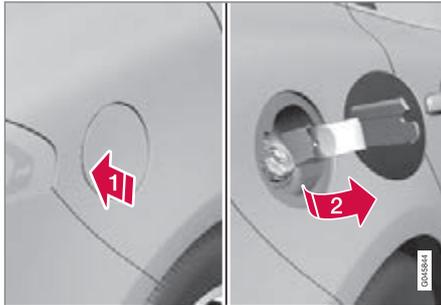


- 1 Open the fuel filler flap by slightly pressing in the rear part of the hatch.
- 2 Take out the flap.

Close the flap after fuelling.

To lock/unlock the fuel filler flap, see page 59. The fuel filler flap's lock logic also follows keyless-drive and central locking's locking and unlocking respectively.

## Opening the fuel filler flap manually

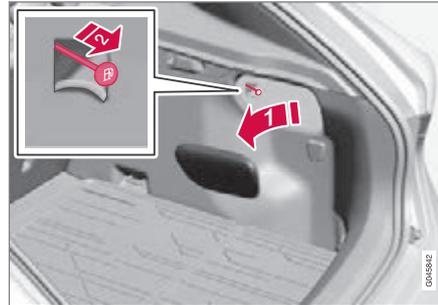

The fuel filler flap can be opened manually when it cannot be opened from outside.


- 1 Open/remove the side hatch in the cargo area (same side as fuel filler flap).
- 2 Carefully pull the line back in a straight line. The flap can now be opened from outside.

**!** **IMPORTANT**

Pull the wire gently - minimal force is required to disengage the hatch lock.

## Filling up with fuel

The fuel tank is fitted with a coverless fuel filler system.

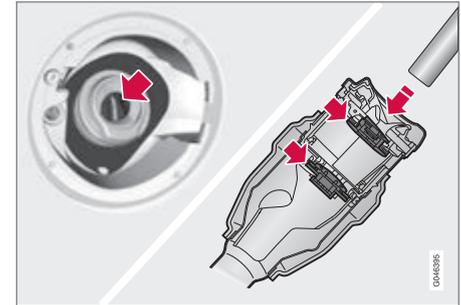

- Insert the pump nozzle in the fuel filler opening. Take care to insert the nozzle **properly** into the filler pipe. The filler pipe consists of two opening covers. The nozzle must be pushed past both covers before refuelling is started.
- Do not overfill the tank but fill until the pump nozzle cuts out.

**i** **NOTE**

Excess fuel in the tank can overflow in hot weather.

**i** **NOTE**

Avoid spillage by waiting approx. 5-8 seconds after refuelling before carefully removing the nozzle.



### Refuelling

#### Filling with a fuel can

When filling with a fuel can, use the funnel located under the floor hatch in the cargo area. Take care to insert the funnel **properly** into the filler pipe. The filler pipe consists of two opening covers. The funnel must be pushed past both covers before filling is started.



### General information on fuel

Fuel of a lower quality than that recommended by Volvo must not be used as engine power and fuel consumption is negatively affected.

#### WARNING

Always avoid inhaling fuel vapour and fuel splashing in the eyes.

In the event of fuel in the eyes, remove any contact lenses and rinse the eyes in plenty of water for at least 15 minutes and seek medical attention.

Never swallow fuel. Fuels such as petrol and diesel are highly toxic and could cause permanent injury or be fatal if swallowed. Seek medical attention immediately if fuel has been swallowed.

#### WARNING

Fuel which spills onto the ground can be ignited.

Switch off the fuel-driven heater before starting to refuel.

Never carry an activated mobile phone when refuelling. The ring signal could cause spark build-up and ignite petrol fumes, leading to fire and injury.

#### IMPORTANT

Mixtures of various fuel types or use of fuels which are not recommended will invalidate Volvo's guarantees and any supplementary service agreements; this is applicable to all engines.

#### NOTE

Extreme weather conditions, driving with a trailer or driving at high altitudes in combination with fuel grade are factors that could affect the car's performance.

### Catalytic converters

The purpose of the catalytic converters is to purify exhaust gases. They are located close to the engine so that operating temperature is reached quickly.

The catalytic converters consist of a monolith (ceramic or metal) with channels. The channel walls are lined with a thin layer of platinum/rhodium/palladium. These metals act as catalysts, i.e. they participate in and accelerate a chemical reaction without being used up themselves.

### Lambda-sond™ oxygen sensor

The Lambda-sond is part of a control system intended to reduce emissions and improve fuel economy.

An oxygen sensor monitors the oxygen content of the exhaust gases leaving the engine. This value is fed into an electronic system that continuously controls the injectors. The ratio of fuel to air directed to the engine is continuously adjusted. These adjustments create optimal conditions for efficient combustion, and together with the three-way catalytic converter reduce harmful emissions (hydrocarbons, carbon monoxide and nitrous oxides).

### Petrol

Petrol must fulfil the EN 228 standard. Most engines can be run with octane ratings of 95 and 98 RON. Only in exceptional cases should 91 RON be used.

- 95 RON can be used for normal driving.
- 98 RON is recommended for optimum performance and minimum fuel consumption.

When driving in temperatures above +38 °C, fuel with the highest possible octane rating is recommended for optimum performance and fuel economy.



## Fuel

### ! IMPORTANT

- Use only unleaded petrol to avoid damaging the catalytic converter.
- Do not use any additives which have not been recommended by Volvo.

### Diesel

Only use diesel fuel from well-known producers. Never use diesel of dubious quality. Diesel should fulfil the EN 590 or JIS K2204 standards. Diesel engines are sensitive to contaminants in the fuel, such as excessively high volumes of sulphur particles for example.

At low temperatures (-6 °C to -40 °C), a paraffin precipitate may form in the diesel fuel, which may lead to ignition problems. Special diesel fuel designed for low temperatures around freezing point is available from the major oil companies. This fuel is less viscous at low temperatures and reduces the risk of paraffin precipitate.

The risk of condensation in the fuel tank is reduced if the tank is kept well filled. When refuelling, check that the area around the fuel filler pipe is clean. Avoid spilling fuel onto the

paintwork. Wash off any spillage with detergent and water.

### ! IMPORTANT

Only ever use fuel that fulfils the European diesel standard.

The sulphur content must be a maximum of 50 ppm.

### ! IMPORTANT

Diesel type fuels that must not be used:

- Special additives
- Marine diesel fuel
- Heating oil
- FAME<sup>1</sup> (Fatty Acid Methyl Ester) and vegetable oil.

These fuels do not fulfil the requirements in accordance with Volvo recommendations and generate increased wear and engine damage that is not covered by the Volvo warranty.

### Empty tank

The design of the fuel system in a diesel engine means that if the vehicle runs out of fuel, the tank may need to be vented in the

workshop in order to restart the engine after fuelling.

Once the engine has stopped due to fuel starvation, the fuel system needs a few moments to carry out a check. Do this before starting the engine, once the fuel tank has been filled with diesel:

1. Insert the remote control key in the ignition switch and push it in to the end position (see page 81).
2. Press the **START** button **without** depressing the brake and/or clutch pedal.
3. Wait approx. 1 minute.
4. To start the engine: Depress the brake and/or clutch pedal and then press the **START** button again.

### i NOTE

Before filling with fuel in the event of fuel shortage:

- Stop the car on as flat/level ground as possible - if the car is tilting there is a risk of air pockets in the fuel supply.

<sup>1</sup> Diesel fuel may contain a certain amount of FAME, but further amounts must not be added.

**Fuel****Draining condensation from the fuel filter**

The fuel filter separates condensation from the fuel. Condensation can disrupt engine operation.

The fuel filter must be drained at the intervals specified in the Service and Warranty Booklet or if you suspect that the car has been filled with contaminated fuel.

**! IMPORTANT**

Certain special additives remove the water separation in the fuel filter.

**Diesel particle filter (DPF)**

Diesel cars are equipped with a particle filter, which results in more efficient emission control. The particles in the exhaust gases are collected in the filter during normal driving. So-called "regeneration" is started in order to burn away the particles and empty the filter. This requires the engine to have reached normal operating temperature.

Filter regeneration takes place automatically and normally takes 10-20 minutes. It may take a little longer at a low average speed. Fuel consumption may increase slightly during regeneration.

**Regeneration in cold weather**

If the car is frequently driven short distances in cold weather then the engine does not reach normal operating temperature. This means that regeneration of the diesel particle filter does not take place and the filter is not emptied.

When the filter has become approximately 80% full of particles, a yellow warning triangle is shown in the combined instrument panel, and the message **Soot filter full** See manual is shown in the information display.

Start regeneration of the filter by driving the car until the engine reaches normal operating temperature, preferably on a main road or motorway. The car should then be driven for approximately 20 minutes more.

**i NOTE**

The following may arise during regeneration:

- a smaller reduction of engine power may be noticed temporarily
- fuel consumption may increase temporarily
- a smell of burning may arise.

When regeneration is complete the warning text is cleared automatically.

Use the parking heater\* in cold weather so that the engine reaches normal operating temperature more quickly.

**! IMPORTANT**

If the filter is completely filled with particles, it may be difficult to start the engine and the filter is non-functional. Then there is a risk that the filter will need to be replaced.

**Fuel consumption and emissions of carbon dioxide**

Fuel consumption figures may change if the car is equipped with extra equipment that affects the car's weight. See information on weights page 379 and table page 387.

The manner in which the car is driven, and other non-technical factors can also affect fuel consumption.

Consumption is higher and power output lower for fuel with an octane rating of 91 RON.

**i NOTE**

Extreme weather conditions, driving with a trailer or driving at high altitudes in combination with fuel grade are factors that could affect the car's performance.



## Loading

### General information on loading

Payload depends on the car's kerb weight. The total of the weight of the passengers and all accessories reduces the car's payload by a corresponding weight. For more detailed information on weights, see page 379.



The tailgate is opened via a button on the lighting panel or the remote control key, see page 58.

### WARNING

The car's driving properties change depending on the weight and positioning of the load.

### To bear in mind when loading

- Position the load firmly against the rear seat's backrest.

Note that objects must not prevent the function of the WHIPS system for the front seats if any of the rear seat's backrests is folded down, see page 26.

- Centre the load.
- Heavy objects should be placed as low as possible. Avoid placing heavy loads on lowered backrests.
- Cover sharp edges with something soft to avoid damaging the upholstery.

- Secure all loads to the load retaining eyelets with straps or web lashings.

### WARNING

A loose object weighing 20 kg can, in a frontal collision at a speed of 50 km/h, carry the impact of an item weighing 1000 kg.

### WARNING

The protection provided by the inflatable curtain in the headlining may be compromised or eliminated by high loads.

- Never load cargo above the backrest.

### WARNING

Always secure the load. Always secure the load. During heavy braking the load may otherwise shift, causing personal injury to the car's occupants.

Cover sharp edges and sharp corners with something soft.

Switch off the engine and apply the parking brake when loading/unloading long items. Otherwise you may accidentally knock the gear lever or gear selector with the load into a drive position - and the car could then move off.

### Front seat

The passenger seat backrest can also be folded for an extra long load, see page 83.

### Roof load

#### Using load carriers

To avoid damaging the car and for maximum possible safety while driving, the load carriers designed by Volvo are recommended.

Carefully follow the installation instructions supplied with the carriers.

- Check periodically that the load carriers and load are properly secured. Lash the load securely with retaining straps.
- Distribute the load evenly over the load carriers. Put the heaviest objects at the bottom.
- The size of the area exposed to the wind, and therefore fuel consumption, increase with the size of the load.
- Drive gently. Avoid quick acceleration, heavy braking and hard cornering.

### WARNING

The car's centre of gravity and driving characteristics are altered by roof loads. For information about the maximum allowable load on the roof, including load carriers and any space box, see page 379.




## Loading

### Lowering the rear seat backrest

To simplify loading in the cargo area, the rear seat backrest can be folded down, see page 86.

### Load retaining eyelets

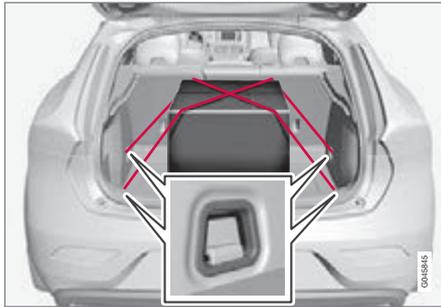

The load retaining eyelets are used to fasten straps in order to anchor items in the cargo area.


### WARNING

Hard, sharp and/or heavy objects which protrude may cause injury under violent braking.

Always secure large and heavy objects with a seatbelt or cargo retaining straps.

### Bag holder

The bag holders keep carrier bags in place and prevent them from overturning and spreading their contents around the cargo area. The holder has a capacity of max. 3 kg.

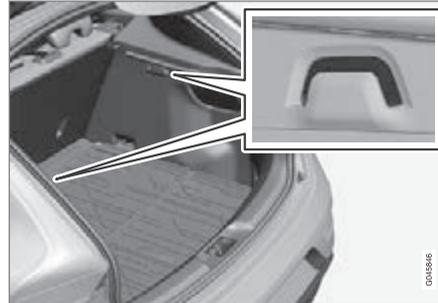

Bag holder

### Folding bag holder\*



Folding bag holder

A folding bag holder in the floor can be opened up in three positions. It can be set to two adjustment positions and one service position, as it is known, where it is fully unfolded. There are also two floor combination variants, one with adjustment positions in a tub under the floor and one with adjustment positions in plastic rails. The raising below shows the adjustment position in a tub under the floor.

The load on the central holder is max. 3 kg, and max. 10 kg on the outer holder.




## Loading



- 1 Lift the handle\* on the upper floor and fold up the floor.
- 2 Move the floor forwards to an appropriate position and place it in the adjustment groove.
3. In service position, the floor is moved all the way forwards towards the rear seat back and placed in the plastic support in the centre.

### 12 V socket\*

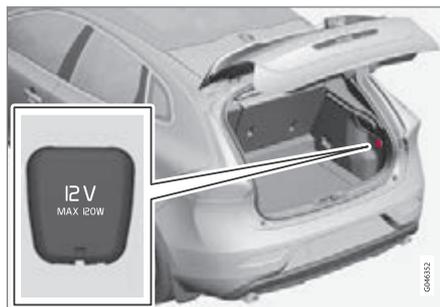

Lower the cover to access the electrical socket.

- The socket also provides voltage when the remote control key is not in the ignition switch.

**!** **IMPORTANT**  
Max. socket current is 10 A (120 W).

**i** **NOTE**  
Remember that using the electrical socket with the engine switched off involves the risk of discharging the car's battery.

**i** **NOTE**  
The compressor for temporary emergency puncture repair has been tested and approved by Volvo. For information on the use of Volvo's recommended temporary emergency puncture repair (TMK), see page 330.



## Cargo area

## Cargo net\*



The cargo net is fitted into four mounting points.

A cargo net prevents cargo from being thrown forward in the passenger compartment in the event of heavy braking. For safety reasons, the cargo net must always be correctly fastened and secured. The mesh is made of a strong nylon fabric and secured behind the front seat backrests.

**WARNING**

Loads in the luggage compartment must be anchored well, and also have a correctly fitted safety net.

## Attaching

**NOTE**

The easiest way to fit the safety net is via one of the rear doors.

**WARNING**

It is necessary to ensure that the upper securing points of the safety net are fitted correctly and that the puller-straps are secured properly. Damaged nets must not be used.

1. Unfold the cargo net and make sure that the split upper rod is locked in the extended position.
2. Hook one end of the rod into the roof mounting with the anchoring strap locks turned towards you.
3. Hook the other end of the rod into the roof mounting on the opposite side - the telescopic spring-loaded retaining hooks facilitate alignment. Take care to press forward the rod's retaining hooks for each respective roof mounting's front end position.



4. Hook the cargo net's anchoring straps into the eyes on the rear of the seat slide rails - it is easier if the backrests are straightened and the seats are moved forward slightly.

Pay attention to make sure that you do not press the seat/backrest hard against the net when the seat/backrest is moved back again - only adjust until the seat/backrest makes contact with the net.

**IMPORTANT**

If a seat/backrest is pushed backwards hard into the safety net then the net and/or its roof mounts may be damaged.


5. Tension the cargo net with the anchoring straps.

\* Option/accessory, for more information, see Introduction.



## Cargo area

### Removal and storage

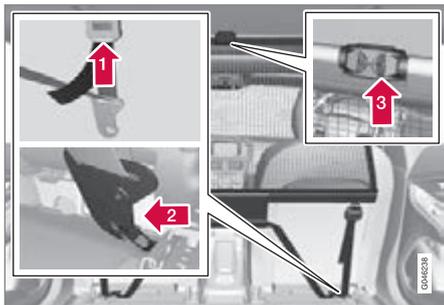

The cargo net can be easily removed and folded up.

- 1 Release the tension in the net by pressing in the button on the anchoring strap's lock and feeding out part of the strap.
- 2 Press in the catch and detach both of the anchoring strap's hooks.
- 3 Unhook the rod from its roof mounting by pulling back on the rod in the roof mountings' rear end position. Press the rod in any direction so that the hook engages in the rod, which at the same time releases the hook on the other side.

Finally, remove the remaining roof mounting hook from the roof mounting.

4. Break the rod in the centre, fold it together and roll up the net.

Insert the net in the storage bag.

The folded cargo net is stored in its bag in the cargo area.



### Parcel shelf



The parcel shelf can be removed to provide additional cargo space.

### Parcel shelf removal

- 1 Undo the parcel shelf lifting eyes on both sides.
- 2 Unhook the front edge of the parcel shelf and remove it.

**Driving with a trailer****General**

Payload depends on the car's kerb weight. The total of the weight of the passengers and all accessories, e.g. towbar, reduces the car's payload by a corresponding weight. For more detailed information on weights, see page 379.

If the towing bracket is mounted by Volvo, then the car is delivered with the necessary equipment for driving with a trailer.

- The car's towing bracket must be of an approved type.
- If the towbar is retrofitted, check with your Volvo dealer that the car is fully equipped for driving with a trailer.
- Distribute the load on the trailer so that the weight on the towing bracket complies with the specified maximum towball load.
- Increase the tyre pressure to the recommended pressure for a full load. For tyre pressure label location, see page 328.
- The engine is loaded more heavily than usual when driving with a trailer.
- Do not tow a heavy trailer when the car is brand new. Wait until it has been driven at least 1000 km.
- The brakes are loaded much more than usual on long and steep downhill slopes.

Downshift to a lower gear and adjust your speed.

- For safety reasons, the maximum permitted speed for the car when coupled with a trailer should not be exceeded. Follow the regulations in force for the permitted speeds and weights.
- Maintain a low speed when driving with a trailer up long, steep ascents.
- Avoid driving with a trailer on inclines of more than 12%.

**Trailer cable**

An adapter is required if the car's towing bracket has 13 pin electrics and the trailer has 7 pin electrics. Use an adapter cable approved by Volvo. Make sure the cable does not drag on the ground.

**Direction indicators and brake lights on the trailer**

If any of the trailer's lamps for direction indicators are broken, then the symbol for direction indicators in the combined instrument panel flashes faster than normal and the information display shows the text **Bulb fail - Ind. signal trailer**.

If any of the trailer's lamps for the brake light are broken then the **Bulb fail - Stop lamp trailer** text is shown.

**Level control\***

The rear shock absorbers maintain a constant height irrespective of the car's load (up to the maximum permissible weight). When the car is stationary the rear of the car lowers slightly, which is normal.

**Trailer weights**

For information on Volvo's permitted trailer weights, see page 380.

**NOTE**

The stated maximum permitted trailer weights are those permitted by Volvo. The maximum permitted speed for a car with a trailer attached is 100 km/h. National vehicle regulations may further restrict the trailer weight and speed. Towbars can be certified for higher towing weights than the car can actually tow.

**WARNING**

Follow the stated recommendations for trailer weights. Otherwise, the car and trailer may be difficult to control in the event of sudden movement and braking.

\* Option/accessory, for more information, see Introduction.



## Driving with a trailer

### Manual gearbox

#### Overheating

When driving with a trailer in hilly terrain in a hot climate there may be a risk of overheating.

- Do not run the engine at higher revolutions than 4500 rpm (diesel engines: 3500 rpm) - otherwise the oil temperature may become too high.

#### Diesel engine 5-cyl

- In the event of a risk of overheating the optimal speed for the engine is 2300-3000 rpm for optimal circulation of the coolant.

### Automatic gearbox

#### Overheating

When driving with a trailer in hilly terrain in a hot climate there may be a risk of overheating.

- An automatic gearbox selects the optimum gear related to load and engine speed.
- In the event of overheating a warning symbol is illuminated in the combined instrument panel and a text message is shown in the information display - follow the recommendation given.

### Steep inclines

- Do not lock the automatic transmission in a higher gear than the engine "can cope with" - it is not always a good idea to drive at a high gear with low engine revolutions.



#### IMPORTANT

See also the specific information on slow driving with trailer for cars with the Powershift automatic transmission on page 122.

### Parking on a hill

- Depress the foot brake.
  - Activate the parking brake.
  - Move the gear selector to position **P**.
  - Release the foot brake.
- Move the gear selector to park position **P** when parking an automatic car with a hitched trailer. Always use the parking brake.
  - Block the wheels with chocks when parking a car with hitched trailer on a hill.

### Starting on a hill

- Depress the foot brake.
- Move the gear selector to driving position **D**.

- Release the parking brake.
- Release the foot brake and start driving off.

### Towing bracket

If the car is equipped with a removable towbar, the installation instructions for the loose section must be followed carefully, see page 312.



#### WARNING

If the car is fitted with a Volvo detachable towbar:

- Follow the installation instructions carefully.
- The detachable section must be locked with the key before setting off.
- Check that the indicator window shows green.

### Important checks

- The towbar's towball must be cleaned and greased regularly.



#### WARNING

The moving parts of the detachable towbar must not be lubricated/oiled. This may reduce safety.



## Driving with a trailer

### **i** NOTE

When a hitch with a vibration damper is used, the towball must not be lubricated.

### Storing the detachable towbar





The storage location for the removable towbar.

### **!** IMPORTANT

Always remove the detachable towbar after use and store it in the designated location in the car.

### Specifications

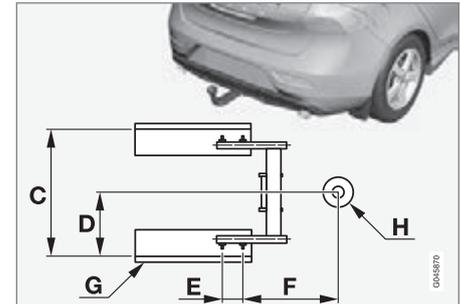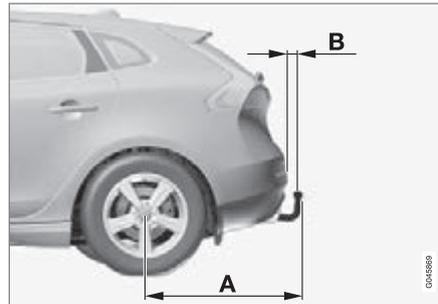


### Dimensions, mounting points (mm)

A	887
B	79
C	881
D	441
E	109
F	306
G	Side member
H	Ball centre



## Driving with a trailer

### Fitting of removable towbar

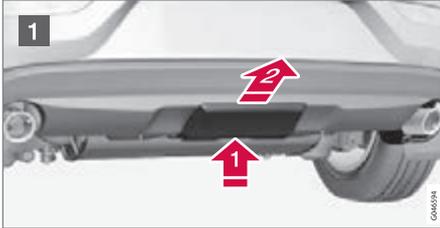

1 Remove the protective cover by first pressing in the catch **1** and then pulling the cover straight back **2**.



2 Ensure that the mechanism is in the unlocked position by turning the key clockwise.



3 The indicator window must show red.



4 Insert the towball section until you hear a click.




5 The indicator window must show green.



6 Turn the key anticlockwise to locked position. Remove the key from the lock.



## Driving with a trailer

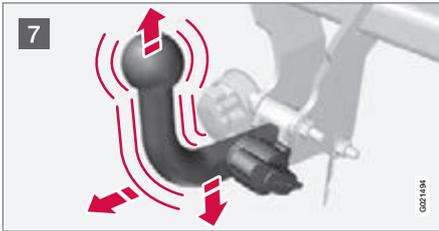

- 7** Check that the towball section is secure by pulling it up, down and back.

### **!** WARNING

If the towball is not fitted correctly then it must be detached and reattached in accordance with the previous instructions.

### **!** IMPORTANT

Only grease in the ball for the towball hitch, the remainder of the towbar must be clean and dry.



- 8** Safety cable.


### **!** WARNING

Take care to secure the trailer's safety cable in the intended bracket.

### Removal of removable towbar



- 1** Insert the key and turn it clockwise to the unlocked position.

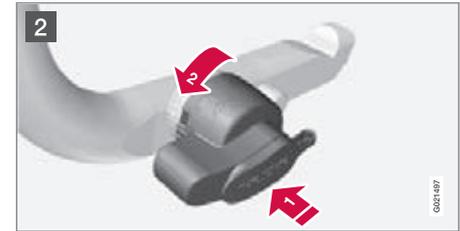

- 2** Push in the locking wheel **1** and turn it anticlockwise **2** until you hear a click.



- 3** Turn the locking wheel down fully, until it comes to a stop. Hold it in this position while pulling the towball rearward and upward.

### **!** WARNING

Secure the detachable towbar safely if it is stored in the car, see page 311.



## Driving with a trailer



4 Push the protective cover until it snaps tight.

### Trailer Stability Assist - TSA\*

The TSA system (Trailer Stability Assist) serves to stabilise the car and trailer combination if it begins to snake.

The TSA function is part of the **DSTC** system (Dynamic Stability and Traction Control), see page 140.

### Function

The snaking phenomenon can occur with any car/trailer combination. Snaking normally occurs at high speeds. But, there is a risk of it occurring at lower speeds (70-90 km/h) if the trailer is overloaded or the load is improperly distributed, e.g. too far back.

In order for snaking to occur, there must be a triggering factor, e.g.:

- Car with trailer subjected to a sudden and powerful side wind.
- Car with trailer drives on an uneven road surface or in a pothole.
- Sweeping steering wheel movements.

### Operation

If snaking has started, it could be difficult or even impossible to suppress. This makes the car/trailer combination difficult to control and there is a risk that you could, for example, end up in the wrong lane or leave the carriageway.

TSA system continually monitors car movements, particularly lateral movements. If snaking is detected, the front wheels are individually braked. This serves to stabilise the car/trailer combination. This is often enough to help the driver regain control of the car.

If snaking is not eliminated the first time the TSA system comes into action, the car/trailer combination is braked with all wheels and engine power is reduced. Once snaking has been gradually suppressed and the car/trailer combination is once again stable, the TSA system stops regulating and the driver once again has full control of the car.

### Miscellaneous

The TSA system can engage within the speed interval 65 to 160 km/h.

**i NOTE**

TSA function is switched off if the driver selects **Sport** mode, see page 140.

TSA may fail to engage if the driver uses severe steering wheel movements to try to rectify the snaking because in such a situation the TSA system cannot determine whether it is the trailer or the driver that is causing the snaking.

 The **DSTC** symbol in the combined instrument panel flashes when the TSA system is working.

**Towing and recovery****Towing**

Find out the statutory maximum speed limit for towing before towing begins.

1. Unlock the steering lock by inserting the remote control key in the ignition switch and giving a long press on the **START/STOP ENGINE** button - key position **II** is activated, see page 81 for more information on key positions.
2. The remote control key must remain in the ignition switch while the car is being towed.
3. Keep the towline taut when the towing vehicle reduces speed by holding your foot gently pressed on the brake pedal - thereby avoiding unnecessary jerking.
4. Be prepared to brake to stop.

**WARNING**

- Check that the steering lock is unlocked before towing.
- The remote control key must be in key position **II** - in position **I** all airbags are deactivated.
- Never remove the remote control key from the ignition switch when the car is being towed.

**WARNING**

The brake servo and power steering do not work when the engine is switched off - the brake pedal needs to be depressed about 5 times more heavily and the steering is considerably heavier than normal.

**Manual gearbox**

Prior to towing:

- Move gear lever into neutral and release the parking brake.

**Automatic gearbox Geartronic****IMPORTANT**

Note that the car must always be towed with the wheels rolling forward.

- Do not tow cars with automatic transmission at speeds higher than 80 km/h or for distances in excess of 80 km. Follow the speeds that are permitted in accordance with local traffic regulations.

Prior to towing:

- Move the gear selector to position **N** and release the parking brake.

**Automatic gearbox Powershift**

The model with Powershift transmission should not be towed as it is dependent on the engine running in order to receive sufficient lubrication. If towing still has to take place, the route must be as short as possible and then with very low speed.

In the event of uncertainty as to whether or not the car is equipped with Powershift transmission, this can be verified by checking the designation on the transmission's label under the bonnet - see page 376. The designation "MPS6" means that it is Powershift - transmission otherwise it is Geartronic automatic transmission.

## Towing and recovery

### IMPORTANT

Avoid towing.

- However, the car can be towed for a short distance at low speed to move it from a dangerous position - not further than 10 km and not faster than 10 km/h. Note that the car must always be towed with the wheels rolling forward.
- In the event of moving a longer distance than 10 km, the car must be transported with the drive wheels raised from the road - professional recovery is recommended.

Prior to towing:

- Move the gear selector to position **N** and release the parking brake.

### Jump starting

Do not tow the car to bump start the engine. Use a donor battery if the battery is discharged and the engine does not start, see page 117.


### IMPORTANT

The catalytic converter may be damaged during attempts to tow-start the engine.

### Towing eye

The towing eye is screwed into a threaded socket behind a cover on the right-hand side of the bumper, front or rear.

### Attaching the towing eye

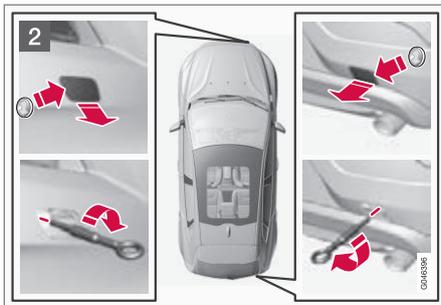

- 1 Take out the towing eye that is located under the floor hatch in the cargo area.

### NOTE

To access the towing eye/wheel wrench in the foam block:

- **Version 1:** Lift the compressor unit for the emergency puncture repair kit (point 5) to access the wheel wrench. Lift out the bottle of sealant (point 6) to access the towing eye.
- **Version 2:** Lift the compressor unit for the emergency puncture repair kit (point 5) to access the towing eye. The wheel wrench is located underneath the jack.

- 2 The cover for the towing eye's attachment point is opened as follows:

- The cover has a marking along one side or in a corner: Press the marking with a finger and fold out the opposite side/corner at the same time - the cover turns around its axis and can then be removed.

Screw the towing eye right in up to its flange. Turn in the towing eye firmly e.g. using the wheel wrench.

The towing eye is unscrewed after use. Place the towing eye back in its position.



## Towing and recovery

Finish by refitting the cover onto the bumper.

### **IMPORTANT**

The towing eye is only designed for towing on roads - **not** for pulling the car unstuck or out of a ditch. Call a recovery service for recovery assistance.


### **Recovery**

Call a recovery service for recovery assistance.

### **IMPORTANT**


Note that the car must always be transported with the wheels rolling forward.

General .....	320
Changing wheels .....	324
Tyre pressure .....	328
Warning triangle and first-aid kit* .....	329
Emergency puncture repair (TMK)* .....	330

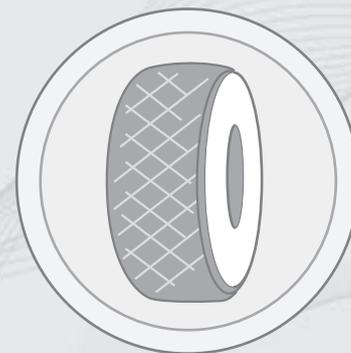

# 08

## WHEELS AND TYRES

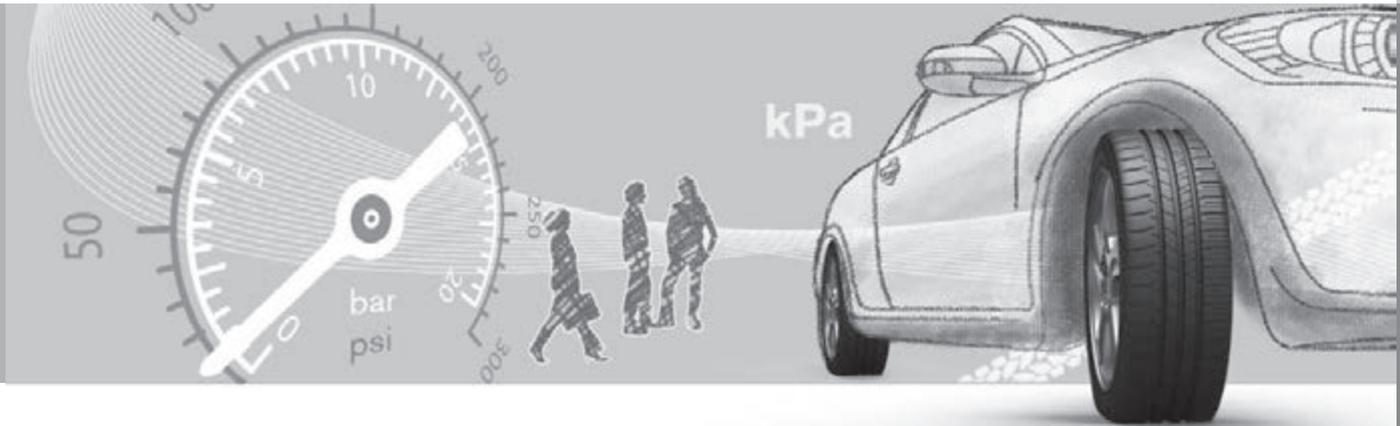




## General

### Driving characteristics

Tyres greatly affect the car's driving characteristics. The type of tyre, dimensions, tyre pressure and speed rating are important for how the car performs.

### Direction of rotation

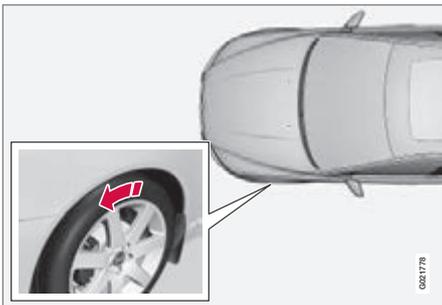

The arrow shows the tyre's direction of rotation.

Tyres with a tread pattern which are designed to only turn in one direction have the direction of rotation marked with an arrow. The tyre must always rotate in the same direction throughout its lifespan. Tyres should only be switched between front and rear positions, never between left and right-hand sides, or vice versa. If the tyres are fitted incorrectly, the car's braking characteristics and capacity to force rain and slush out of the way are adversely affected.

Tyres with the greatest tread depth should always be fitted to the rear of the car (to decrease the risk of skidding).

### **i** NOTE

Make sure that both pairs of wheels have the same type and dimension, and also the same make.

Follow the recommended tyre pressures specified in the tyre pressure table, see page 391.

### Tyre care

#### Tyre age

All tyres older than 6 years old should be checked by an expert even if they seem undamaged. Tyres age and decompose, even if they are hardly ever or never used. The function can therefore be affected. This applies to all tyres that are stored for future use. Examples of external signs which indicate that the tyre is unsuitable for use are cracks or discoloration.

### New tyres



Tyres are perishable. After a few years they begin to harden at the same time as the friction capacity/characteristics gradually deteriorate. For this reason, aim to get as fresh tyres as possible when you replace them. This is especially important with regard to winter tyres. The last four digits in the sequence mean the week and year of manufacture. This is the tyre's DOT marking (Department of Transportation), and this is stated with four digits, for example 1510. The tyre in the illustration was manufactured in week 15 of 2010.

#### Summer and winter tyres

When summer and winter wheels are changed the wheels should be marked with



## General

which side of the car they were mounted on, for example **L** for left and **R** for right.

### Wear and maintenance


The correct tyre pressure results in more even wear, see page 328. Driving style, tyre pressure, climate and road condition affect how quickly your tyres age and wear. To avoid differences in tread depth and to prevent wear patterns arising, the front and rear wheels can be switched with each other. A suitable distance for the first change is approx. 5000 km and then at 10 000 km intervals. Volvo recommends that you contact an authorised Volvo workshop for checking if you are uncertain about tread depth. If significant differences in wear (>1 mm difference in tread depth) between tyres have already occurred, the least worn tyres must always be placed on the rear. Understeer is normally easier to correct than oversteer, and leads to the car continuing forwards in a straight line rather than having the rear end skidding to one side, resulting in possible complete loss of control over the car. This is why it is important for the rear wheels never to lose grip before the front wheels.

Wheels should be stored lying down or hanging up - and not standing up.

### WARNING

A damaged tyre may lead to loss of control over the car.


### Tyres with tread wear indicators

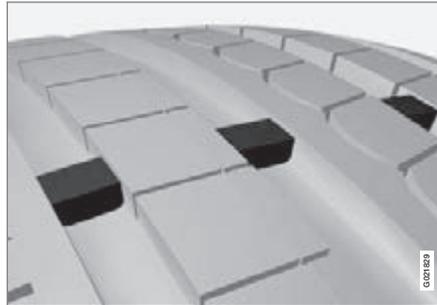

*Tread wear indicators.*

Tread wear indicators are narrow treadless bands across the width of the tread. On the side of the tyre are the letters **TWI** (Tread Wear Indicator). When the tyre's tread depth is down to 1.6 mm, the tread depth will be level in height with the tread wear indicators. Change to new tyres as soon as possible. Remember that tyres with little tread depth provide very poor grip in rain and snow.

### Rims and wheel bolts

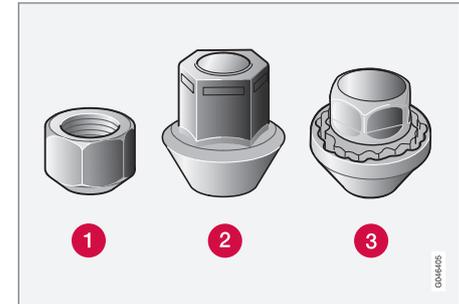

- 1** Low wheel bolt
- 2** High wheel bolt
- 3** Locking wheel bolts

### Tightening torque:

- **Type 1 wheel bolt (steel rim):** 110 Nm
- **Type 2 wheel bolt (aluminium rim):** 130 Nm
- **Type 3 Lockable wheel bolt (steel/aluminium rim):** 110 Nm

Only use rims that are tested and approved by Volvo and which are Volvo genuine accessories. Check the torque with a torque wrench.



# 08 Wheels and tyres

## General

### Locking wheel bolts\*

Locking wheel bolts\* can be used on both aluminium and steel rims. Under the cargo area floor there is space for the sleeve for the lockable wheel bolts.

### Winter tyres

Volvo recommends winter tyres with particular dimensions. Tyre dimensions are dependent on engine variant. When driving on winter tyres, the correct type of tyres must be fitted to all four wheels.

#### NOTE

Volvo recommends that you consult a Volvo dealer about which wheel rim and tyre types are most suitable.

### Studded tyres

Studded winter tyres should be run in gently for 500-1000 km so the studs settle properly into the tyres. This gives the tyre, and especially the studs, a longer service life.

#### NOTE

The legal provisions for the use of studded tyres vary from country to country.

### Tread depth

Road conditions with ice, slush and low temperatures place considerably higher demands on tyres than summer conditions. Volvo therefore recommends not to drive on winter tyres that have a tread depth of less than 4 millimetres.

### Using snow chains

Snow chains may only be used on the front wheels (also applies to all-wheel drive cars).

Never drive faster than 50 km/h with snow chains. Avoid driving on bare ground as this wears out both the snow chains and tyres.

#### WARNING

Use Volvo genuine snow chains or equivalent chains designed for the car model, and tyre and rim dimensions. In the event of uncertainty Volvo recommends that you consult an authorised Volvo workshop. The wrong snow chains may cause serious damage to your car and lead to an accident.

### Specifications

The car has whole vehicle approval. This means that certain combinations of wheels and tyres are approved. For the permissible combinations, see page 391

### Wheel (rim) dimensions

Wheels (rims) have a designation of dimensions, for example: 7Jx16x50.

7	Rim width in inches
J	Rim flange profile
16	Rim diameter in inches
50	Off-set in mm (distance from wheel centre to wheel contact surface against the hub)

### Tyre dimensions

The dimensions are stated on all car tyres. Example of designation: 215/55R16 97W.

205	Tyre width (mm)
50	Ratio between tyre wall height and tyre width (%)
R	Radial ply
17	Rim diameter in inches (")
93	Codes for the maximum permitted tyre load, tyre load index (LI)
W	Speed rating for maximum permitted speed, speed rating (SS). (In this case 270 km/h).



### Load index

Each tyre has a certain capacity to carry a load, a load index (LI). The car's weight determines the load capacity required of the tyres. Minimum permitted index is specified in the table, see page 391.

### Speed ratings

Each tyre can withstand a certain maximum speed, a speed rating (Speed Symbol; SS).

Tyre speed class must at least correspond with the car's top speed. Minimum permitted speed rating is specified in the table, see page 391.

The only exception to these conditions is winter tyres (both those with metal studs and those without), where a lower speed rating may be used. If such a tyre is chosen, the car must not be driven faster than the speed rating of the tyre (for example, class Q can be driven at a maximum of 160 km/h).

Traffic regulations determine how fast a car can be driven, not the speed rating of the tyres.

Q	160 km/h (used only on winter tyres)
T	190 km/h
H	210 km/h
V	240 km/h
W	270 km/h
Y	300 km/h

### WARNING

The car must be fitted with tyres which have the same or a higher load index (LI) and speed rating (SS) than specified. If a tyre with too low a load index or speed rating is used, it may overheat.

### NOTE

The maximum permitted speed is specified in the table.




## Changing wheels

### Spare wheel\*<sup>1</sup>

The spare wheel (Temporary spare) is only intended for use temporarily and must be replaced by an ordinary wheel as soon as possible. The car's handling may be altered by the use of the spare wheel. The spare wheel is smaller than the normal wheel. The car's ground clearance is affected accordingly. Pay attention to high kerbs and do not machine wash the car. If the spare wheel is fitted on the front axle, you cannot use snow chains at the same time. On all-wheel drive cars the drive on the rear axle can be disconnected. The spare wheel must not be repaired. The correct tyre pressure for the spare wheel is stated in the tyre pressure table, see page 391.

### ! IMPORTANT

- Never drive faster than 80 km/h with a spare wheel on the car.
- The car must never be driven fitted with more than one "Temporary Spare" wheel.

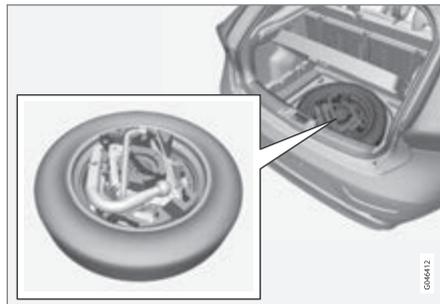

### Taking out the spare wheel

The spare wheel\* plus jack\* and wheel wrench\* are stored under the floor in the cargo area.

1. Lift the rear edge of the luggage compartment floor (or on models with a jointed luggage compartment floor, take hold of the luggage compartment floor handle, lift and move the rear part of the floor forwards).
2. Lift out the storage compartment (optional extra) - models with a jointed luggage compartment floor only.
3. Lift out the lower floor (models with a jointed luggage compartment floor only).

4. Undo the attaching screw and lift out the foam block containing the jack and tools.
5. Take hold of the far end of the spare wheel, then lift. Push the spare wheel forwards slightly and lift it out of the storage compartment.
6. Remove the wheel wrench, the jack and the towing eye from the foam block.

### i NOTE

The jack must be lifted out in order to access the towing eye.

### Jack\*

The original jack should only be used for changing to the spare wheel. The jack's thread must always be well greased.

### Removing

Set up the warning triangle, see page 329 if a wheel must be replaced at a busy location. The car and jack\* must be on a firm horizontal surface.

<sup>1</sup> If the car is equipped with a temporary tyre repair kit, see page 330 for information.



## Changing wheels

1. Apply the parking brake and engage reverse gear, or position **P** if the car has an automatic gearbox.

### **!** WARNING

Check that the jack is not damaged, that the threads are thoroughly lubricated and that it is free from dirt.


### **i** NOTE

Volvo recommends only using the jack\* that belongs to the car model in question, which is indicated on the jack's label.


The decal also indicates the jack's maximum lift capacity at a specified lifting height.

2. Take out the spare wheel and tools (see the description on page 324). There is also a package containing gloves and a wheel bag for the punctured wheel.
3. Place chocks in front of and behind the wheels which will remain on the ground. Use heavy wooden blocks or large stones for example.
4. Cars with steel rims have removable wheel covers. Use the removal tool to hook in and pull off any full-wheel wheel

covers. Alternatively, the wheel covers can be pulled away by hand.

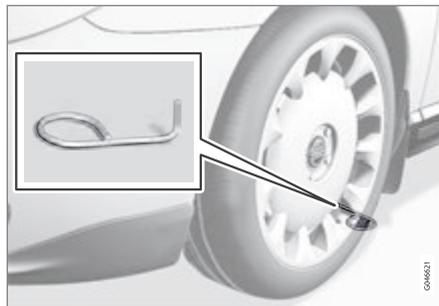

5. Screw together the towing eye with the wheel wrench\* until the stop position as shown in the following illustration.

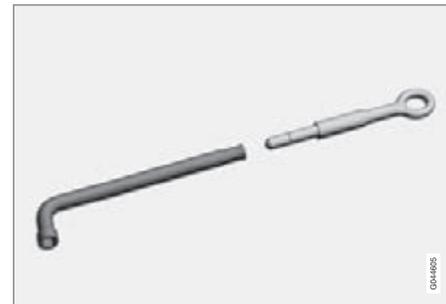

*The wheel wrench and towing eye*

### **!** IMPORTANT

The towing eye must be screwed into all threads in the wheel bolt wrench.

6. Loosen the wheel bolts  $\frac{1}{2}$ -1 turn anti-clockwise with the wheel wrench.


### **!** WARNING

Never position anything between the ground and the jack, nor between the jack and the car's jacking point.

7. There are two jacking points on each side of the car.

\* Option/accessory, for more information, see Introduction.

## Changing wheels

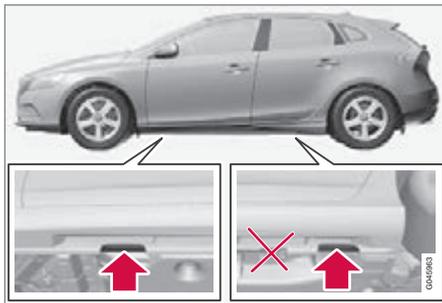

### **!** IMPORTANT

The ground under the jack must be firm, smooth and level.

8. Wind up the jack so that the flange in the bodywork ends up in the notch in the head of the jack.
9. Lift the car so that the wheel is free. Remove the wheel bolts and lift off the wheel.

### **!** WARNING

Never crawl under the car when it is raised on the jack.

Passengers must leave the car when it is raised on the jack.

Park the car such that passengers have the car, or ideally a crash barrier, between themselves and the roadway.

### **i** NOTE

The car's regular jack is designed only for use occasionally and for a short time, such as when changing a wheel with a punctured tyre, switching between summer tyres and winter tyres, etc. Only the jack belonging to the specific model is to be used to jack up the car. If the car is to be jacked up more often, or for a longer time than is required just to change a wheel, use of a garage jack is recommended. In this instance, follow the instructions for use that come with the equipment.

### Installation

1. Clean the contact surfaces between wheel and hub.
2. Put on the wheel. Tighten the wheel bolts thoroughly.


3. Lower the car so that the wheels cannot rotate.



4. Tighten the wheel bolts crosswise. It is important that the wheel bolts are tightened properly (see page 321 for tightening torques). Check the torque with a torque wrench.
- 5.



## Changing wheels

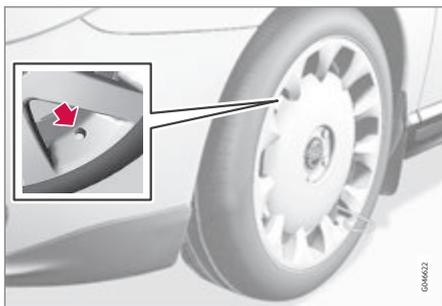


Refit any full wheel covers.

### NOTE

The wheel cover outlet for the valve must be positioned over the valve on the wheel rim during fitting.

### Replacing the spare wheel\* and jack\* in the cargo area

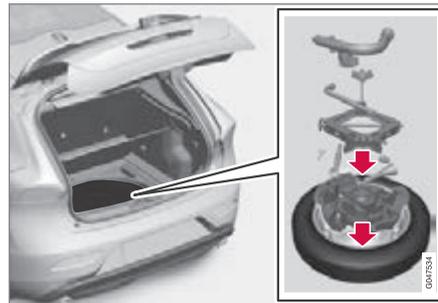

The tools and jack\* must be returned to their correct places in the foam block after use.

1. Unscrew the towing eye from the wheel bolt wrench.
2. Put back any tools that have been used in the relevant compartments in the foam block in the following order:
  - towing eye/funnel/torx wrench/socket for locking wheel bolts/tool for wheel covers
  - Jack (must be cranked to the correct height so that it fits into the foam block's compartment, the handle

above the foot and down in the groove in the foam block)

- Socket wrench (above the jack)
3. If the spare wheel has been used then the punctured wheel can be placed in the plastic bag contained in the package with the gloves. Place the foam block back in the storage compartment and tighten the mounting screw to the floor of the storage compartment.

If the spare wheel has **not** been used then place the foam block in the spare wheel, and place the spare wheel back in the storage compartment, and tighten the mounting screw to the floor of the storage compartment.

4. Return the detachable towbar

### IMPORTANT

The tools and jack\* must be stored in the intended location in the car's cargo area when not in use.



## Tyre pressure

### Tyre pressure



The tyre pressure decal on the driver's side door pillar (between frame and rear door) shows which pressures the tyres should have at different loads and speed conditions. This is also specified in the tyre pressure table, see page 391.

- Tyre pressure for the car's recommended tyre dimension
- ECO pressure<sup>1</sup>

#### NOTE

Temperature differences change the tyre pressure.

### Fuel economy, ECO pressure

In order to obtain optimum fuel economy at speeds below 160 km/h an ECO pressure is recommended (applies to both full and light load - see page 391).

### Checking the tyre pressure

The tyre pressures must be checked every month.

Check tyre pressures on cold tyres. "Cold tyres" means the tyres are the same temperature as the ambient temperature. After several few kilometres of driving, the tyres warm up and the pressure increases.

Inadequate tyre pressure increases fuel consumption, shortens tyre lifespan and impairs the car's roadholding. Driving on tyres with tyre pressure that is too low could result in the tyres overheating and being damaged. Tyre pressure affects travelling comfort, road noise and steering characteristics.

#### NOTE




Tyre pressure decreases over time, this is a natural phenomenon. Tyre pressure also varies depending on ambient temperature.

<sup>1</sup> ECO pressure results in improved fuel economy.



## Warning triangle and first-aid kit\*

### Warning triangle

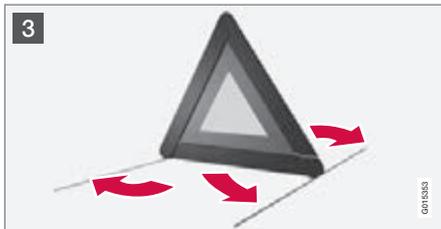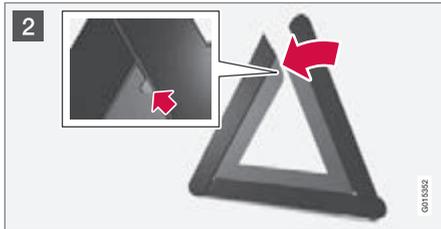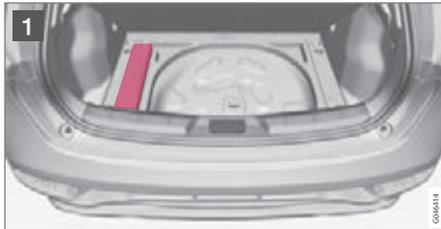

- 1 Lift the floor hatch (or push the rear part of the luggage compartment floor forwards in models with a jointed floor and then lift the lower floor) and remove the warning triangle.
- 2 Take the warning triangle from the case, fold out and assemble the two loose sides.
- 3 Fold out the warning triangle's support legs.

Follow the regulations for the use of a warning triangle. Position the warning triangle in a suitable place with regard to traffic.

Ensure the warning triangle and its case are properly secured in the cargo area after use.

### First aid kit\*


A case containing first aid equipment is located on the left side of the cargo area.

\* Option/accessory, for more information, see Introduction.




### Emergency puncture repair (TMK)\*

#### General

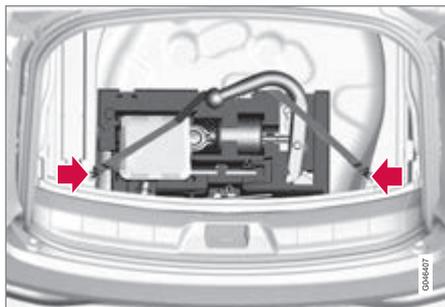

Version 1.

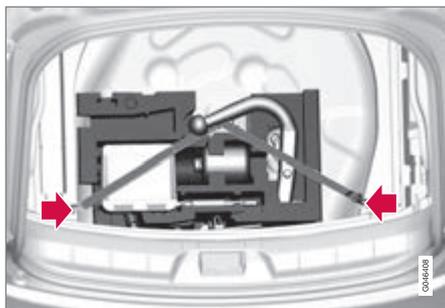

Version 2.

Emergency puncture repair (TMK: Temporary Mobility Kit) is used to seal a puncture and check and adjust tyre pressure. It consists of

a compressor and a bottle with sealing fluid. The kit works as a temporary repair. The sealing fluid bottle must be replaced before its expiration date and after use.

The sealing fluid effectively seals tyres punctured in the tread.

#### **i** NOTE

The emergency puncture repair kit is only intended for sealing tyres with a puncture in the tread.

The emergency puncture repair kit has limited capacity to seal tyres which have punctures in the wall. Do not seal tyres with the emergency puncture repair kit if they have larger slits, cracks or similar damage.

Connect the compressor to one of the car's 12 V sockets; see pages 244 and 306.

Choose the socket that is nearest the punctured tyre.

#### **i** NOTE

The compressor for temporary emergency puncture repair has been tested and approved by Volvo.

#### Positioning of the emergency puncture repair kit and warning triangle

Set up the warning triangle if a tyre is being sealed in a trafficked location. The warning triangle and emergency puncture repair kit are located under the floor in the cargo area.

1. Lift the rear edge of the luggage compartment floor (or on models with a jointed luggage compartment floor, take hold of the luggage compartment floor handle, lift and move the rear part of the floor forwards).
2. Lift out the storage compartment (optional extra) - models with a jointed luggage compartment floor only.
3. Lift out the lower floor (models with a jointed luggage compartment floor only).
4. Unhook the elastic part of the belt over the TMK compressor unit on the left side.
5. Lift the TMK compressor unit straight up.
6. To access the bottle of sealant, it must be pushed to the left until it can be lifted out of the foam block.



## Emergency puncture repair (TMK)\*

**i** NOTE

To access the towing eye/wheel wrench in the foam block:


- **Version 1:** Lift the compressor unit for the emergency puncture repair kit (point 5) to access the wheel wrench. Lift out the bottle of sealant (point 6) to access the towing eye.
- **Version 2:** Lift the compressor unit for the emergency puncture repair kit (point 5) to access the towing eye. The wheel wrench is located underneath the jack.

After use, hook the belt back onto the left side.

**Version 1:** The belt must be pulled behind the foam block (not above).


**Version 2:** The belt must be in the fork on the rear part of the foam block.

## Overview

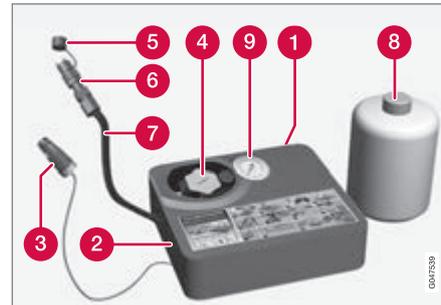

- 1 Label, maximum permitted speed
- 2 Switch
- 3 Cable
- 4 Bottle holder (orange cap)
- 5 Protective cap
- 6 Pressure reducing valve
- 7 Air hose
- 8 Sealing fluid bottle
- 9 Pressure gauge

## Sealing punctured tyres

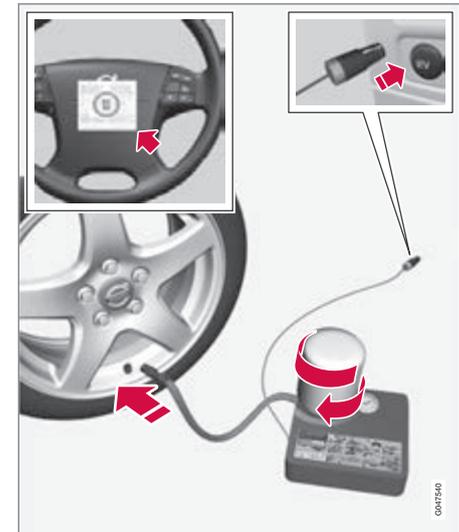

For information on the function of the parts, see preceding illustration.

1. Detach the label for maximum permitted speed (which is fitted on one side of the compressor) and affix it to the steering wheel.



## Emergency puncture repair (TMK)\*

### WARNING

You should not drive faster than 80 km/h after the emergency tyre repair kit has been used. Volvo recommends that you visit an authorised Volvo workshop for inspection of the sealed tyre (maximum driving distance is 200 km). The staff there can determine whether or not the tyre can be repaired or if it needs to be replaced.

### WARNING

The sealing fluid can irritate the skin. In the case of contact with skin, wash away the fluid with soap and water.

2. Check that the switch is in position **0** and locate the cable and the air hose.

### NOTE

Do not break the bottle's seal before use. The seal is broken automatically when the bottle is screwed in.

3. Unscrew the orange cap and unscrew the bottle's stopper.
4. Screw the bottle into its holder.

### WARNING

Do not unscrew the bottle, it is equipped with a reverse catch to prevent leakage.

5. Unscrew the wheel's dust cap and screw in the air hose valve connection to the bottom of the thread on the tyre's air valve.
6. Plug the cable into the 12 V socket and start the car.

### WARNING

Do not leave children in the car without supervision when the engine is running.

7. Flick the switch to position **I**.

### WARNING

Never stand next to the tyre when the compressor is running. If cracks or unevenness arise then the compressor must be switched off immediately. The journey should not be continued. Contacting an authorised tyre centre is recommended.

### NOTE

When the compressor starts, the pressure can increase up to 6 bar but the pressure drops after approximately 30 seconds.

8. Inflate the tyre for 7 minutes.

### IMPORTANT

Risk of overheating. The compressor must not run for more than 10 minutes.

9. Switch off the compressor to check the pressure on the pressure gauge. Minimum pressure is 1.8 bar and maximum 3.5 bar. (Release air with the pressure reducing valve if the tyre pressure is too high.)

### WARNING

If the pressure is below 1.8 bar then the hole in the tyre is too big. The journey should not be continued. Contacting an authorised tyre centre is recommended.

10. Switch off the compressor and unplug the cable from the 12 V socket.
11. Detach the hose from the tyre valve and fit the valve cap.



## Emergency puncture repair (TMK)\*

- As soon as possible, drive approximately 3 km at a maximum speed of 80 km/h so that the sealing fluid can seal the tyre.

### Rechecking the repair and pressure

- Reconnect the equipment.
- Read the tyre pressure on the pressure gauge.
  - If it is below 1.3 bar then the tyre is insufficiently sealed. The journey should not be continued. Contact a tyre centre.
  - If the tyre pressure is higher than 1.3 bar, the tyre must be inflated to the pressure specified in accordance with the tyre pressure table, see page 391 (1 bar=100 kPa). Release air using the pressure reducing valve if the tyre pressure is too high.

#### WARNING

Do not unscrew the bottle, it is equipped with a reverse catch to prevent leakage.

- Make sure the compressor is switched off. Detach the air hose and cable. Refit the dust cap.

- Fold the hose into the box and leave the bottle where it is. Place TMK in the cargo area.

#### NOTE

The sealing fluid bottle and the hose must be replaced after use. Volvo recommends that this replacement is performed by an authorised Volvo workshop.

#### WARNING

Check the tyre pressure regularly.

Volvo recommends that you drive to the nearest authorised Volvo workshop for the replacement/repair of the damaged tyre. Advise the workshop that the tyre contains sealing fluid.

#### WARNING

You should not drive faster than 80 km/h after the emergency tyre repair kit has been used. Volvo recommends that you visit an authorised Volvo workshop for inspection of the sealed tyre (maximum driving distance is 200 km). The staff there can determine whether or not the tyre can be repaired or if it needs to be replaced.

### Inflating the tyres

The car's original tyres can be inflated by the compressor.

- The compressor must be switched off. Make sure that the switch is in position **O** and locate the cable and air hose.
- Unscrew the wheel's dust cap and screw in the air hose valve connection to the bottom of the thread on the tyre's air valve.

#### WARNING

Inhaling car exhaust fumes could result in danger to life. Never leave the engine running in sealed areas or areas that lack sufficient ventilation.

#### WARNING

Do not leave children in the car without supervision when the engine is running.

- Connect the cable to one of the car's 12 V sockets and start the car.
- Start the compressor by flicking the switch to position **I**.

\* Option/accessory, for more information, see Introduction.




## Emergency puncture repair (TMK)\*

### ! IMPORTANT

Risk of overheating. The compressor must not run for more than 10 minutes.

- Inflate the tyre to the pressure specified in accordance with the tyre pressure table, see page 391. (Release air using the pressure reducing valve if the tyre pressure is too high.)
- Switch off the compressor. Detach the air hose and cable.
- Refit the dust cap.


### Refitting the components in the foam block

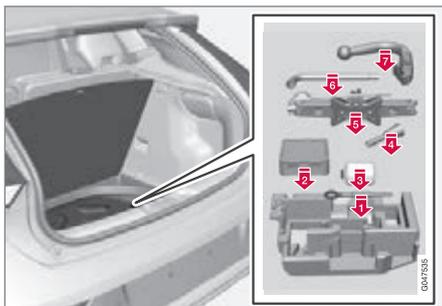

Version 1

The components are fitted in the foam block in the following order:

- Towing eye/socket wrench
- Bottle (pressed in from the side)
- TMK kit
- Funnel
- Jack
- Torx wrench
- Towbar

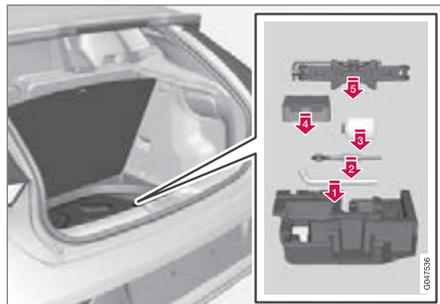

Version 2

The components are fitted in the foam block in the following order:

- Socket wrench
- Towing eye
- Bottle
- TMK kit

- Jack

### Replacing the sealing fluid canister

Replace the bottle when the expiration date has passed. Treat the old bottle as environmentally hazardous waste.

### ! WARNING

The bottle contains 1.2-Ethanol and natural rubber-latex.

Harmful if ingested. Could result in allergic reaction in the event of skin contact.

Avoid contact with the skin and eyes.

Store out of the reach of children.




Engine compartment.....	338
Lamps.....	345
Wiper blades and washer fluid.....	352
Battery.....	355
Fuses.....	359
Car care.....	368



# 09

## MAINTENANCE AND SERVICE

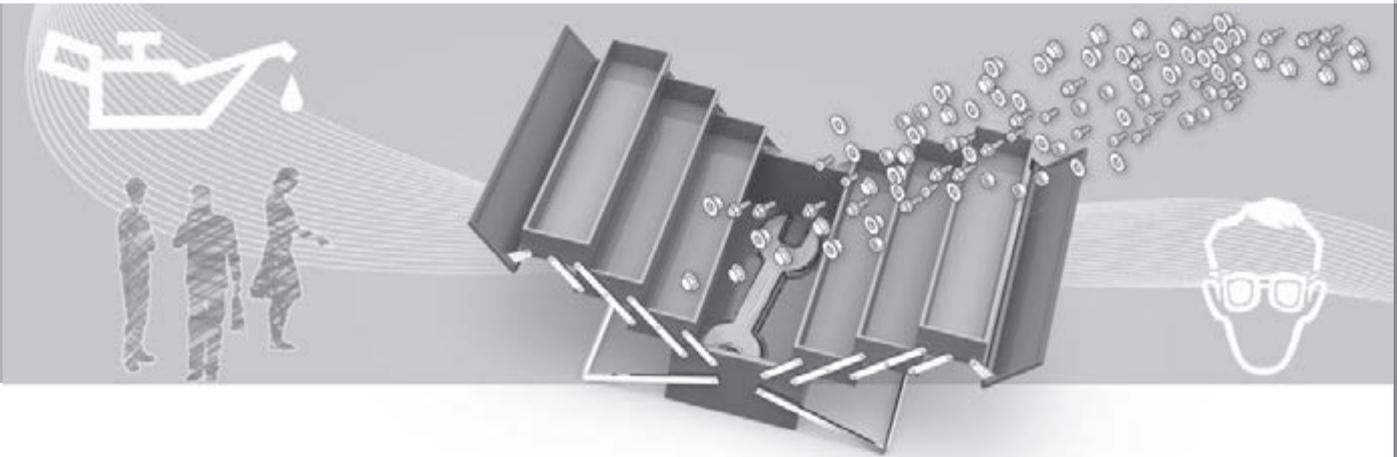



## Engine compartment

### General

#### Volvo service programme

To keep the car as safe and reliable as possible, follow the Volvo service programme as specified in the Service and Warranty Booklet. Volvo recommends engaging an authorised Volvo workshop to perform the service and maintenance work. Volvo workshops have the personnel, special tools and service literature to guarantee the highest quality of service.

#### **!** IMPORTANT

For the Volvo warranty to apply, check and follow the instructions in the Service and Warranty Booklet.

#### Check regularly

Check the following oils and fluids at regular intervals, e.g. when refuelling:

- Coolant
- Engine oil
- Washer fluid

#### **!** WARNING


Remember that the radiator fan (located at the front of the engine compartment, behind the radiator) may start automatically some after the engine has been switched off.

Always have the engine cleaned by a workshop. There is a risk of fire if the engine is hot.

#### Opening and closing the bonnet



*The handle for bonnet opening is always on the left-hand side.*

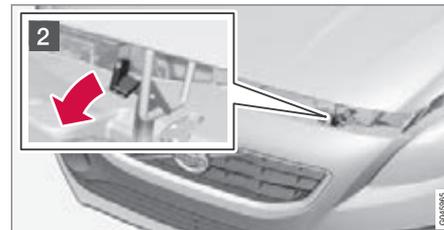

- 1 Turn the handle about 20-25 degrees clockwise. You will hear when the catch releases.
- 2 Move the catch to the left and open the bonnet. (The catch hook is located between the headlamp and grille, see illustration.)


#### **!** WARNING

Check that the bonnet locks properly when closed.



## Engine compartment

## Engine compartment, overview

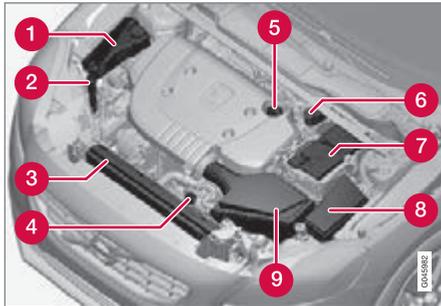

The appearance of the engine compartment may vary depending on engine variant.

- 1 Coolant expansion tank
- 2 Filling washer fluid
- 3 Radiator
- 4 Engine oil dipstick<sup>1</sup>
- 5 Filling engine oil
- 6 Reservoir for brake and clutch fluid (located on the driver's side)
- 7 Starter battery

- 8 Relay and fuse box
- 9 Air filter

**WARNING**

The ignition system has very high voltage and output. The voltage in the ignition system is highly dangerous. The car's electrical system must always be in key position **0** when work is being performed in the engine compartment, see page 81.

Do not touch the spark plugs or ignition coil when the car's electrical system is in key position **II** or when the engine is hot.

## Checking the engine oil



Volvo recommends Castrol oil products.

When driving under adverse conditions, see page 383.

**IMPORTANT**

In order to fulfil the requirements for the engine's service intervals all engines are filled with a specially adapted synthetic engine oil at the factory. The choice of oil has been made very carefully with regard to service life, starting characteristics, fuel consumption and environmental impact.

An approved engine oil must be used in order that the recommended service intervals can be applied. Only use a prescribed grade of oil for both filling and oil change, otherwise you will risk affecting service life, starting characteristics, fuel consumption and environmental impact.

Volvo Car Corporation disclaims all warranty liability if engine oil of the prescribed grade and viscosity is not used.

Volvo recommends that oil changes are carried out at an authorised Volvo workshop.

Volvo uses different systems for warning of low/high oil level or low/high oil pressure. Certain variants have an oil pressure sensor,

<sup>1</sup> Engines with electronic oil level sensor have no dipstick (5-cyl. diesel).



## Engine compartment


and then the combined instrument panel's warning symbol for low oil pressure is used. Other variants have an oil level sensor, when the driver is informed via the instrument's warning symbol  and display texts. Certain variants have both systems. Contact a Volvo dealer for more information.

Change the engine oil and oil filter in accordance with the intervals specified in the Service and Warranty Booklet.

Using oil of a higher than specified grade is permitted. If the car is driven in adverse conditions, Volvo recommends using an oil of a higher grade, see page 383.

For capacities, see page 384 and onwards.


### Engine with oil dipstick<sup>2</sup>

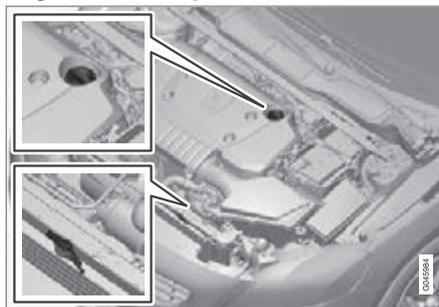

*Dipstick and filler pipe.*

Checking the oil level in a new car is especially important before the first scheduled oil change.

Volvo recommends checking the oil level every 2 500 km. The most accurate measurements are made on a cold engine before starting. The measurement will be inaccurate if taken immediately after the engine is switched off. The dipstick will indicate that the level is too low because the oil has not had time to flow down into the oil sump.

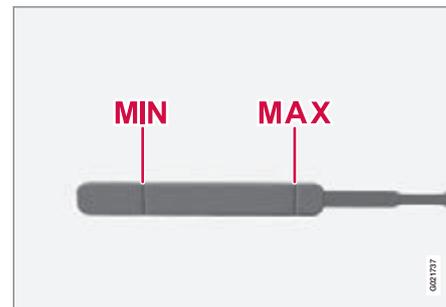

*The oil level must be between the **MIN** and **MAX** marks.*

### Measurement and filling if required

1. Ensure that the car is level. After switching off the engine it is important to wait 5 minutes to allow the oil time to run back to the sump.
2. Pull up and wipe the dipstick.
3. Re-insert the dipstick.
4. Pull it out and check the level.
5. If the level is close to **MIN** then 0.5 litres should be added. If the level is significantly below, then an additional amount is required.

<sup>2</sup> Only applies to petrol and 4-cyl. diesel.



## Engine compartment


6. If required, check the level again, do it after driving a short distance. Then repeat steps 1 - 4.

**! WARNING**

Never fill above the **MAX** mark. The level should never be above **MAX** or below **MIN** as this could lead to engine damage.


**! WARNING**

Do not spill oil onto the hot exhaust manifold due to the risk of fire.

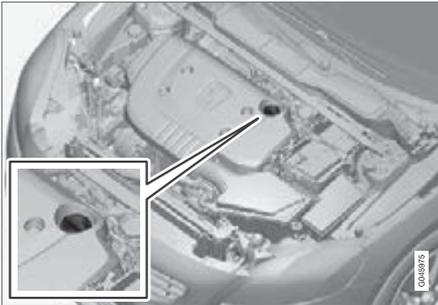Engine with electronic oil level sensor<sup>3</sup>

Filler pipe

You do not need to take action with respect to the engine oil level before a message is shown in the combined instrument panel's information display, see the illustration below.

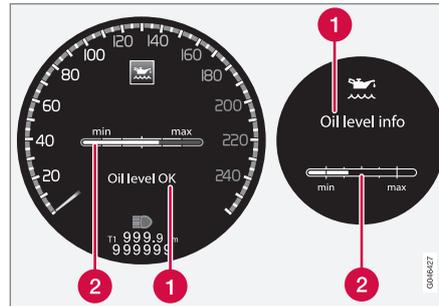

Message and graph in the display. The left-hand display shows the digital combined instrument panel and the right-hand the analogue.

- 1** Message
- 2** Engine oil level

On certain cars, the oil level can be checked using the electronic oil level gauge with the thumbwheel when the engine is switched off, see page 342.

**! WARNING**

If the message **Oil service required** is shown, visit a workshop. The oil level may be too high.

**! IMPORTANT**

In the event of the message **Oil level low Refill 0.5 litre**, only fill with 0.5 litres.

**i NOTE**

The oil level is only detected by the system during driving. The system cannot directly detect changes when the oil is filled or drained. The car must be driven about 30 km before the oil level display is correct.

**! WARNING**

Do not fill more oil if filling level (3) or (4) appears as shown in the illustration below. The level must never be above **MAX** or below **MIN**, as this could lead to engine damage.

<sup>3</sup> Only applies to 5-cyl. diesel.



## Engine compartment


### **! WARNING**

Do not spill oil onto the hot exhaust manifold due to the risk of fire.

### Measuring the oil level\*

If the oil level needs to be checked then it should be carried out in accordance with the sequence below.

1. Activate key position II, see page 81.
2. Rotate the thumbwheel on the left-hand stalk switch to position **Oil level**.
  - > You will then see information displayed about the engine oil level.

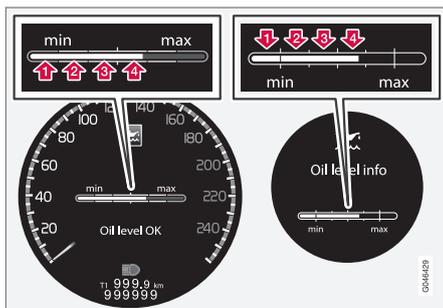


The figures 1-4 represent filling level. Do not fill more oil if filling level (3) or (4) is shown. The recommended filling level is 4. Message and graph in the display. The left-hand display shows the

digital combined instrument panel and the right-hand the analogue.

### Coolant

#### Checking the level and topping up

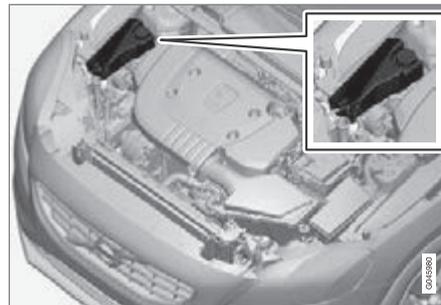

When topping up the coolant, follow the instructions on the packaging. It is important that the mixture of coolant concentrate and water is correct for the prevailing weather conditions. Never top up with water only. The risk of freezing increases with both too little and too much coolant concentrate.

### **! WARNING**

Coolant can be very hot. If the coolant requires topping up when the engine is at operating temperature, unscrew the expansion tank cap slowly to gently release the overpressure.

For capacities and for standards regarding water quality, see page 385.

#### Check the coolant regularly

The level must lie between the **MIN** and **MAX** marks on the expansion tank. If the system is not filled sufficiently, high temperatures could occur, causing a risk of damage to the engine.



## Engine compartment

### ! IMPORTANT

- A high content of chlorine, chlorides and other salts may cause corrosion in the cooling system.
- Always use coolant with anti-corrosion agent as recommended by Volvo.
- Ensure that the coolant mixture is 50% water and 50% coolant.
- Mix the coolant with approved quality tap water. In the event of any doubt about water quality, used ready-mixed coolant in accordance with Volvo recommendations.
- When changing coolant/replacing cooling system components, flush the cooling system clean with approved quality tap water or flush with ready-mixed coolant.
- The engine must only be run with a well-filled cooling system. Otherwise, temperatures that are too high may occur resulting in the risk of damage (cracks) in the cylinder head.

### Brake and clutch fluid

#### Checking the level

Brake and clutch fluid have a common reservoir. The level must be between the **MIN** and **MAX** marks that are visible inside the reservoir. Check the level regularly.


Change the brake fluid every other year or at every other regular service.

For capacities and recommended fluid grade, see page 385. The fluid should be changed annually on cars driven in conditions requiring hard, frequent braking, such as driving in mountains or tropical climates with high humidity.

### ! WARNING

If the brake fluid is below the **MIN** level in the brake fluid reservoir, do not drive further before topping up the brake fluid. Volvo recommends that the reason for the loss of brake fluid is investigated by an authorised Volvo workshop.

#### Filling

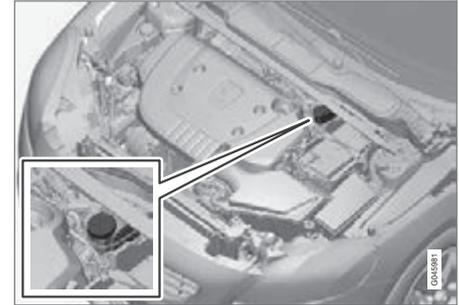

*The fluid reservoir is located on the driver's side.*

Unscrew the reservoir cap and fill the fluid. The level must be between the **MIN** and **MAX** marks, which are located on the inside of the reservoir.

### ! IMPORTANT

Do not forget to refit the cap.



## Engine compartment

### Air conditioning system

#### Troubleshooting and repair

The air conditioning system contains fluorescent tracing agents. Use ultraviolet light when looking for leaks.

Volvo recommends that you contact an authorised Volvo workshop.



#### WARNING

The air conditioning system contains pressurised refrigerant R134a. This system must only be serviced and repaired by an authorised workshop.



## Lamps

**General**

The bulbs are specified, see page 350. The following list contains locations of bulbs and other light sources that are specialised, such as LED<sup>1</sup> lamps, or are unsuitable for changing for some other reason, except at a workshop:

- Active Xenon headlamps - ABL (Xenon lamps)
- Position/parking lamps front<sup>2</sup>
- Daytime running lights<sup>2</sup>
- Side direction indicators, door mirrors<sup>2</sup>
- Approach lighting, door mirrors
- Interior and cargo area lighting
- Glovebox lighting
- Position/parking lamps rear
- Side marker lamps, rear
- Brake light above the rear windscreen
- Number plate lighting.

**WARNING**

On cars with Xenon headlamps, the replacement of Xenon lamps must be carried out at a workshop - an authorised Volvo workshop is recommended. Working with Xenon lamps demands extreme caution because the headlamp is equipped with a high voltage unit.

**WARNING**

The car's electrical system must be in key position **0** when replacing bulbs, see page 81.

**IMPORTANT**


Never touch the glass part of the bulbs with your fingers. Grease from your fingers is vaporised by the heat, coating the reflector and then causing damage.

**NOTE**

If an error message remains after the broken bulb has been replaced then we recommend that you visit an authorised Volvo workshop.

**NOTE**

Outside lighting such as headlamps, fog lamps and rear lamps may temporarily have condensation on the inside of the lens. This is normal, all exterior lighting is designed to withstand this. Condensation is normally vented out of the lamp housing when the lamp has been switched on for a time.

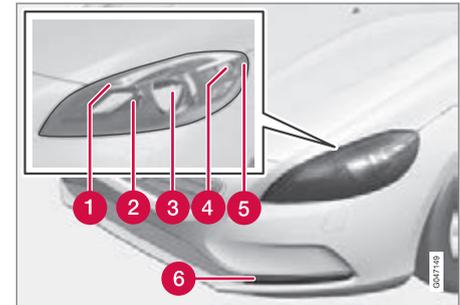**Location of front bulbs**

- 1 Position/parking lamps (LED in Xenon headlamps)
- 2 Main beam in Xenon headlamps / Extra main beam in Xenon headlamps

<sup>1</sup> LED (Light Emitting Diode)

<sup>2</sup> Certain variants




## Lamps

- 3 Dipped beam in Xenon headlamps / Xenon lamps in Xenon headlamps
- 4 Indicator
- 5 Side marker lamps
- 6 Daytime running lights (LED\* or bulb depending on variant)

### Headlamps front

All of the headlamp bulbs are replaced via the engine compartment. Loosen and remove the whole headlamp.

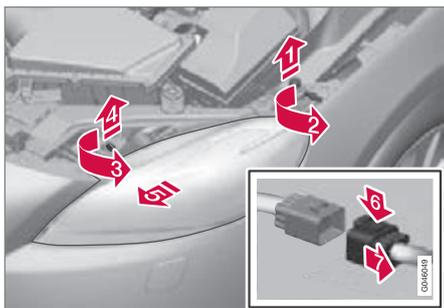

1. Lift out the bonnet stop.

2. Loosen the screw with a Torx tool, size T30.
3. Turn the locking pin anticlockwise.
4. Pull out the locking pin.
4. Release the headlamp by alternately tilting and pulling it out.

### ! IMPORTANT

Take care when lifting out the headlamp so as not to damage any parts.


5. Press down the catch.
  - Unplug the connector.
- Place the headlight on a soft surface so as not to scratch the lens.

### ! IMPORTANT

Do not pull the electrical cable, only the connector.

6. Replace the relevant bulb as instructed.
- The headlight must be fitted and the contact fitted correctly before switching on the lights or switching key position.


### Cover for main/dipped beam lamps

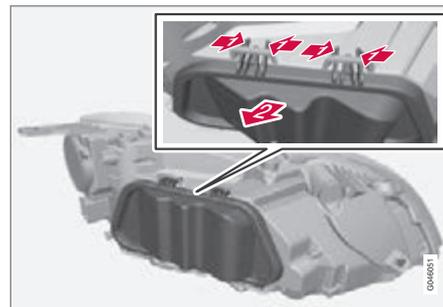


1. Press the hooks together.
- Angle out the cover.
2. Replace the relevant bulb as instructed.




## Lamps

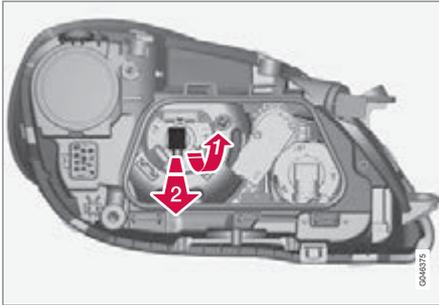Dipped beam<sup>3</sup>

1. Detach the headlamp, see page 346.
2. Undo the cover, see page 346.
3.  Press the bulb holder upwards until it releases.  
 Pull out the bulb holder.
4. Replace the bulb and put back the parts in reverse order.

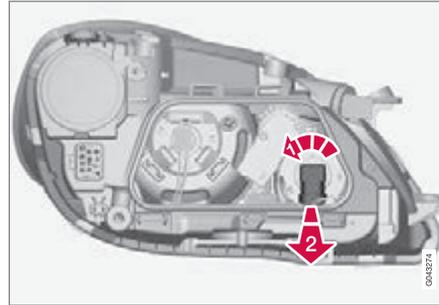Main beam<sup>3</sup>

1. Detach the headlamp, see page 346.
2. Undo the cover, see page 346.
3.  Turn the bulb holder anticlockwise.  
 Pull out the bulb holder.
4. Replace the bulb and put back the parts in reverse order.

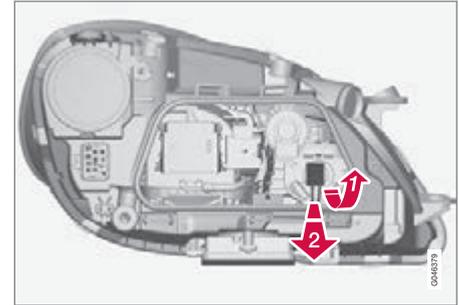Additional main beam\*<sup>4</sup>


1. Detach the headlamp, see page 346.
2. Undo the cover, see page 346.
3.  Press the bulb holder upwards until it detaches.  
 Pull out the bulb holder.
4. Replace the bulb and put back the parts in reverse order.

<sup>3</sup> Cars with halogen headlights<sup>4</sup> Cars with xenon headlights




## Lamps

### Direction indicators

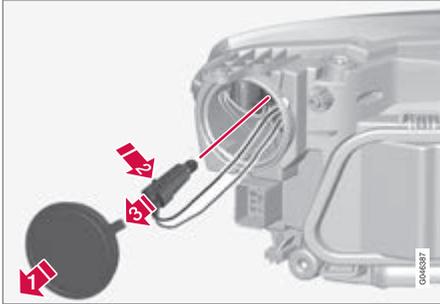


1. Detach the headlamp, see page 346.
2. **1** Undo the cover.
3. **2** Push in the catch.  
**3** Pull out the bulb holder.
4. Replace the bulb and put back the parts in reverse order.

### Position/parking lamps<sup>5</sup>

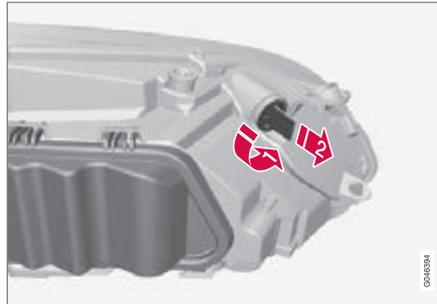

1. Detach the headlamp, see page 346.
2. **1** Turn the bulb holder anticlockwise.  
**2** Pull out the bulb holder.
3. Replace the bulb and put back the parts in reverse order.

### Side marker lamps

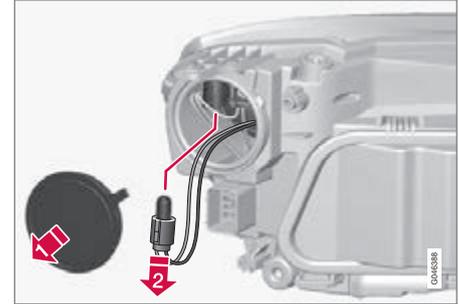


1. Detach the headlamp, see page 346.
2. **1** Undo the cover.
3. **2** Pull down the bulb holder.
4. Replace the bulb and put back the parts in reverse order.

<sup>5</sup> Not applicable to cars with xenon headlights as these are equipped with LED lamps.




## Lamps

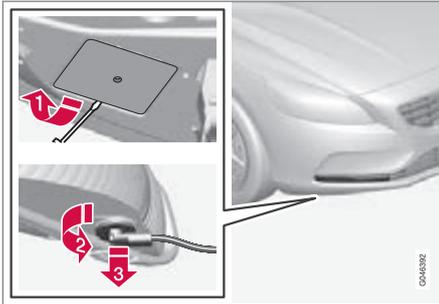Daytime running lights<sup>6</sup>


1. Undo the cover.
2. Turn the bulb holder anticlockwise.  
 Pull out the bulb holder.
3. Replace the bulb and put back the parts in reverse order.

## Location of rear bulbs

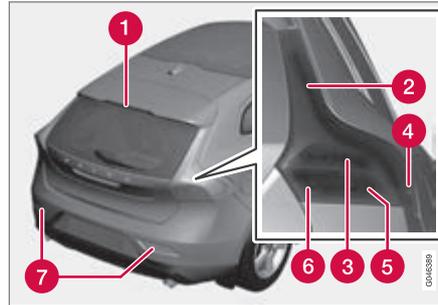

- Brake light (LED)
- Position/parking lights (LED)
- Brake light
- Side marker lamps (LED)
- Indicator
- Reversing lamp
- Rear fog lamp

## Lamp housing, rear

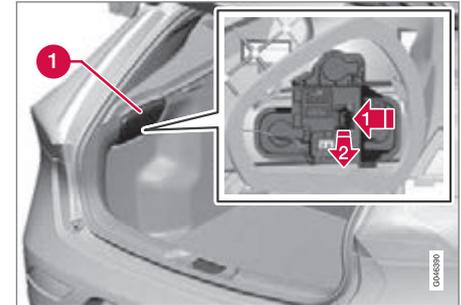

Direction indicators, brake lights and rear lights are replaced from inside the cargo area.

1. Remove the hatch in the upholstery (1) on the same side as the defective bulb.
2. Press the catch sideways.  
 Pull out the bulb holder.
3. Remove the blown bulb by pressing it in and turning anticlockwise.
4. Replace the bulb and put back the parts in reverse order.

<sup>6</sup> Only applies to daytime running lights with bulbs.



## Lamps

### Rear fog lamp



1 Insert (approx. 20 mm) a blunt, knife-like object, e.g. a table knife, at the triangle.

➡ Carefully prise until the lug releases.

#### ! IMPORTANT

Take care not to damage any parts.

2 ➡ Turn the bulb holder anticlockwise.

➡ Pull out the bulb holder.

3. Replace the bulb and put back the parts in reverse order.

### Vanity mirror lighting



1. Insert a screwdriver under the lamp lens and gently prize up the lug on the edge.
2. Carefully detach and lift aside the lamp lens.
3. Using needle-nose pliers, pull the bulb straight out to the side. Do not squeeze too hard with the pliers. Otherwise, the bulb glass could break.
4. Replace the bulb and put back the parts in reverse order.

### Specifications of bulbs

Lighting	[W] <sup>A</sup>	Type
Dipped beam <sup>B</sup>	55	H7 LL
Main beam <sup>B</sup>	65	H9
Additional main beam <sup>C</sup>	55	H7 LL
Front direction indicators	21	HY21W
Position/parking lamps front <sup>B</sup>	5	W5W LL
Side marker lamps front	5	WY5W LL
Daytime running lights <sup>D</sup>	19	PW19W
Side direction indicators, door mirrors <sup>D</sup>	5	WY5W LL
Direction indicators, rear	21	PY21W LL
Brake light	21	P21W LL
Reversing lamp	21	P21W LL



## Lamps

09

Lighting	[W] <sup>A</sup>	Type
Rear fog lamp	21	H21W LL
Vanity mirror lighting	1.2	T5 Socket W2x4.6d

A Watt

B Cars with halogen headlights

C Cars with xenon headlights

D Certain variants



## Wiper blades and washer fluid

### Wiper blades

#### Service position



Wiper blades in service position.

In order to change, clean or lift the wiper blades (for scraping off ice from the windscreen, for example) they must be in service position.

#### **IMPORTANT**

Before placing the wiper blades in the service position, make sure that they are not frozen down.

1. Place the remote control key in the ignition lock<sup>1</sup> and briefly press the **START/**

**STOP ENGINE** button to set the car's electrical system to key position **I**. (For detailed information on key positions, see page 81.)


2. Briefly press the **START/STOP ENGINE** button again to set the car's electrical system in key position **0**.
3. Within 3 seconds, move the right stalk switch up and hold it in position for approx. 1 second.
  - > The wipers then move to standing straight up.

The wipers return to their starting position when you briefly press the **START/STOP ENGINE** button to set the car's electrical system to key position **I** (or when the car is started).

#### **IMPORTANT**

If the wiper arms in the service position have been folded up from the windscreen, they must be folded back down onto the windscreen before the wipers are allowed to return to their starting position. This is to avoid scraping the paint on the bonnet.

### Replacing the wiper blades

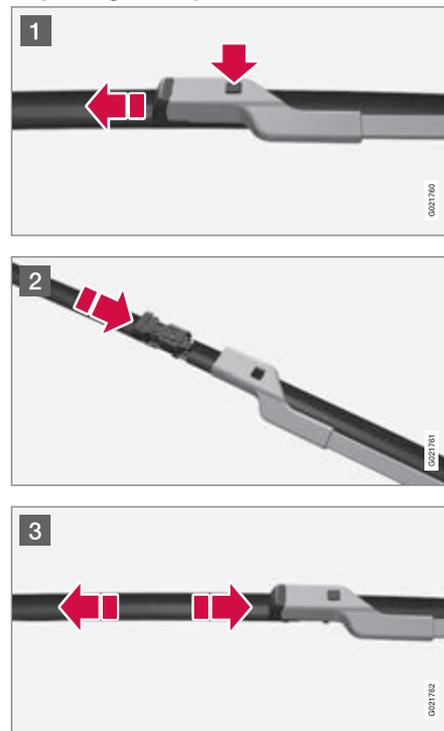


<sup>1</sup> Not necessary in cars with Keyless function.



## Wiper blades and washer fluid

- 1 Fold up the wiper arm when it is in service position. Press the button located on the wiper blade mounting and pull straight out parallel with the wiper arm.
- 2 Slide in the new wiper blade until a "click" is heard.
- 3 Check that the blade is firmly installed.
- 4 Fold the wiper arm back towards the windscreen.

The wipers return from service position to their starting position when you briefly press the **START/STOP ENGINE** button to set the car's electrical system to key position **I** (or when the car is started).

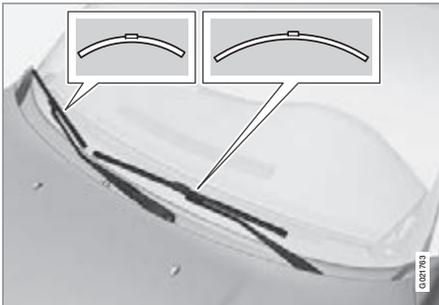


### NOTE

The wiper blades are different lengths. The blade on the driver's side is longer than on the passenger side.

### WARNING

Since the car is equipped with airbag Pedestrian Airbag, Volvo recommends that genuine wiper arms are used and that you only use genuine parts for them.

### Replacing the wiper blades, rear window

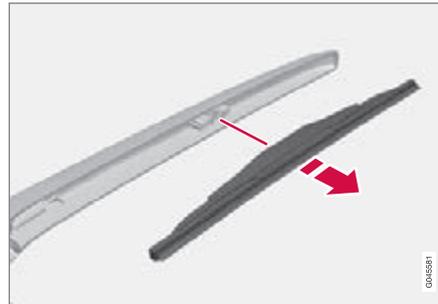

1. Fold out the wiper arm.
2. Grip the inner section of the blade (by the arrow).

3. Turn anticlockwise to use the blade's end position against the wiper arm as a lever to detach the blade more easily.
4. Press the new wiper blade into position. Check that it is firmly installed.
5. Lower the wiper arm.


### Cleaning

For cleaning wiper blades and windscreen, see page 368 and onwards.

### IMPORTANT

Check the blades regularly. Neglected maintenance shortens the service life of the wiper blades.

### Filling washer fluid

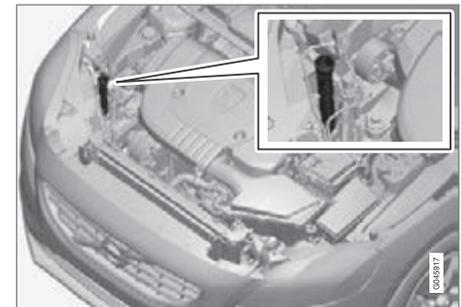



### Wiper blades and washer fluid

The windscreen and headlamp washers share a common reservoir.



#### **IMPORTANT**

Use washer fluid with antifreeze during the winter to avoid freezing in the pump, reservoir and hoses.

For capacities, see page 385.



## Battery

**Operation**

The service life and function of the battery is influenced by factors such as the number of starts, discharging, driving style, driving conditions, climatic conditions etc.

- Never disconnect the battery when the engine is running.
- Check that the cables to the battery are correctly connected and properly tightened.

**WARNING**

- The battery can generate oxyhydrogen gas, which is highly explosive. A spark can be formed if a jump lead is connected incorrectly, and this can be enough for the battery to explode.
- The battery contains sulphuric acid, which can cause serious burns.
- If sulphuric acid comes into contact with eyes, skin or clothing, flush with large quantities of water. If acid splashes into the eyes - seek medical attention immediately.

**NOTE**

The life of the battery is shortened if it becomes discharged repeatedly.

The life of the battery is affected by several factors, including driving conditions and climate. Battery starting capacity decreases gradually with time and therefore needs to be recharged if the car is not used for a longer time or when it is only driven short distances. Extreme cold further limits starting capacity.

To maintain the battery in good condition, at least 15 minutes of driving/week is recommended or that the battery is connected to a battery charger with automatic trickle charging.

A battery that is kept fully charged has a maximum service life.

**IMPORTANT**

A quick charger must never be used when charging the battery.

**IMPORTANT**

If the following instruction is not observed then the energy saving function for infotainment may be temporarily disengaged, and/or the message in the combined instrument panel's information display about the starter battery's state of charge may be temporarily inapplicable, following the connection of an external starter battery or battery charger:

- The negative battery terminal on the car's starter battery must **never** be used for connecting an external starter battery or battery charger - only the **car chassis** may be used as the grounding point.

See the section "Start assistance" - for a description of how the cable clamps must be attached.



## Battery

### Symbols on the battery

	Use protective goggles.
	Further information in the owner's manual.
	Store the battery out of the reach of children.
	The battery contains corrosive acid.

	Avoid sparks and naked flames.
	Risk of explosion.
	Must be taken for recycling.

**i NOTE**  
An expended battery must be recycled in an environmentally safe manner as it contains lead.

### Replacing the main battery

Volvo recommends that you allow an authorised workshop to replace the batteries - an authorised Volvo workshop is recommended. For more information on the car's main battery - see page 117

### Start/Stop

Cars with the Start/Stop function are equipped with two 12 V batteries - one extra powerful battery for starting and one support battery that helps during the Start/Stop function's starting sequence.

For more information on Start/Stop - see page 125.

For more information on the car's main battery - see page 117 and 393.



## Battery

Battery	Start	Support
Cold start capacity <sup>A</sup> , CCA (A)	760 <sup>B</sup> 800 <sup>C</sup>	120 <sup>B</sup> 180 <sup>C</sup>
Size <sup>D</sup> , L×W×H (mm)	278×175×190 <sup>B</sup> 315×175×190 <sup>C</sup>	150×90×106 <sup>B</sup> 150×90×130 <sup>C</sup>
Capacity (Ah)	70 <sup>B</sup> 80 <sup>C</sup>	8 <sup>B</sup> 10 <sup>C</sup>

A According to EN standard.

B Manual gearbox.

C Automatic gearbox.

D Largest possible size.

**IMPORTANT**

When replacing batteries in cars with the Start/Stop function, the AGM<sup>1</sup> type batteries must be fitted.


**NOTE**

- The higher the current take-off in the car (extra cooling/heating, etc.) the more the batteries must be charged = increased fuel consumption.
- When the capacity of the battery has fallen below the lowest permissible level then the Start/Stop function is disengaged.

Temporarily reduced Start/Stop function due to high current take-off means:

- The engine starts automatically<sup>2</sup> without the driver depressing the clutch pedal (manual gearbox).
- The engine starts automatically without the driver lifting his/her foot off the foot brake pedal (automatic gearbox).

## Location of the batteries

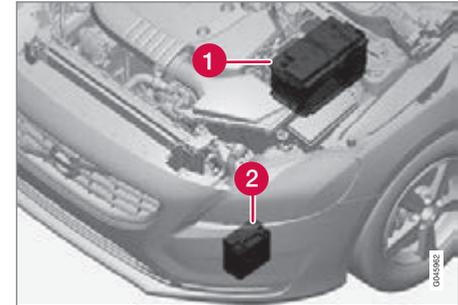

(1) Starter battery<sup>3</sup> (2) Support battery

The support battery normally requires no more service than the normal battery that is used for starting. A workshop should be contacted in the event of questions or problems - an authorised Volvo workshop is recommended.

<sup>1</sup> Absorbed Glass Mat

<sup>2</sup> Automatic starting can only take place if the gear lever is in neutral position.

<sup>3</sup> The battery for starting is described in detail on page 356.



### Battery

#### **IMPORTANT**

If the following instruction is not observed then the Start/Stop function may temporarily cease to work after the connection of an external battery or battery charger:

- The negative battery terminal on the car's main battery must **never** be used for connecting an external battery or battery charger - only the **car chassis** may be used as the grounding point.

See the section "Start assistance" - for a description of how the cable clamps must be attached.

#### **NOTE**

If the battery has become so discharged that everything is "black" and in principle the car does not have all the normal electrical functions and the engine is subsequently started using an external battery or battery charger, then the Start/Stop function will be activated. It will then be possible for the engine to be auto-stopped but in the event of an auto-stop the Start/Stop function may fail to auto-start the engine due to inadequate capacity in the battery.

The battery must first be charged in order to ensure a successful auto-start after an auto-stop. At an outside temperature of +15 °C the battery needs to be charged for at least 1 hour. At a lower outside temperature a charging time of 3-4 hours is recommended. The recommendation is that the battery is charged using an external battery charger.

If this is not possible then the recommendation is to temporarily deactivate the Start/Stop function until the battery has been adequately recharged.

For more information about recharging the battery, see the section "Battery" in the chapter "Maintenance and service".



## General

All electrical functions and components are protected by a number of fuses in order to protect the car's electrical system from damage by short circuiting or overloading.

If an electrical component or function does not work, it may be because the component's fuse was temporarily overloaded and failed. If the same fuse fails repeatedly then there is a fault in the circuit. Volvo recommends that you visit an authorised Volvo workshop for checking.

## Changing


1. Look in the fuse diagram to locate the fuse.
2. Pull out the fuse and check from the side to see whether the curved wire has blown.
3. If this is the case, replace it with a new fuse of the same colour and amperage.



## WARNING

Never use a foreign object or a fuse with an amperage higher than that specified when replacing a fuse. This could cause significant damage to the electrical system and possibly lead to fire.

## Location, fuse boxes

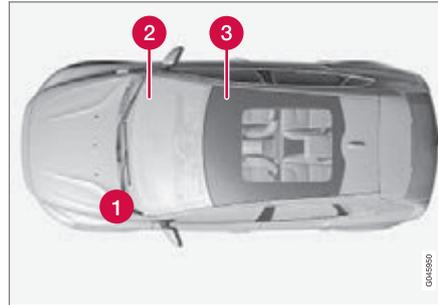


Fuse box locations in a left-hand drive car. In a right-hand drive car the fuse box under the glovebox changes sides.

- 1 Engine compartment
- 2 Under the glovebox
- 3 Below right front seat



## Fuses

### Engine compartment

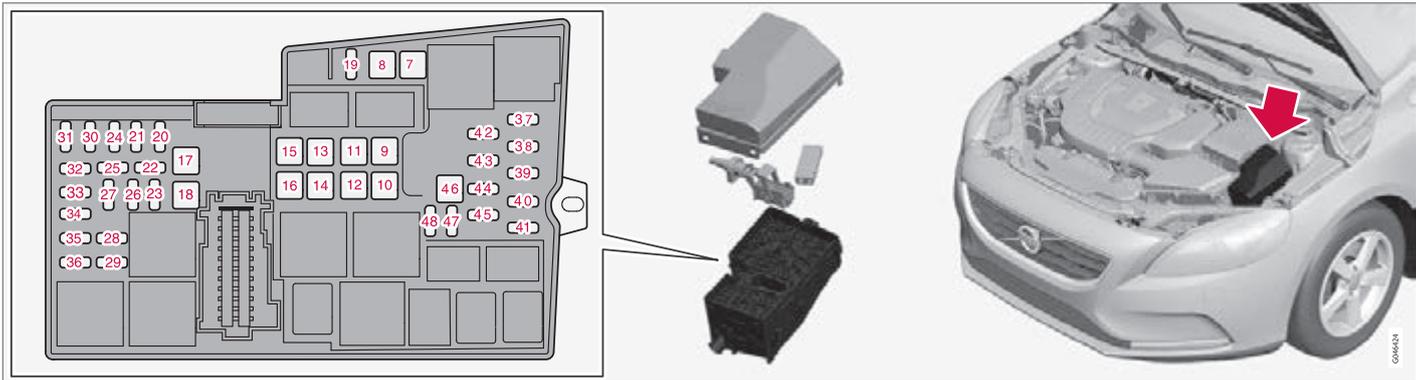


On the inside of the cover there are tweezers that facilitate the procedure for the removal and fitting of fuses.

The fuse box also provides space for several spare fuses.

### Replacing fuses

The fuses can be accessed following the removal of the cover fitted on the starter battery and the cover for the electrical distribution unit.

### Removing the covers

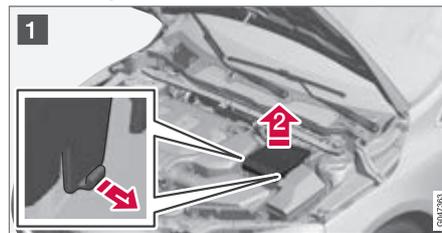

1 Fold out the locking catches that are fitted on the sides of the cover on the starter battery.

Lift the cover straight up.




2 Fold out the locking catch that is fitted on the side of the electrical distribution unit.



## Fuses

2 Rotate the cover upward until the lock lugs (1) are released.

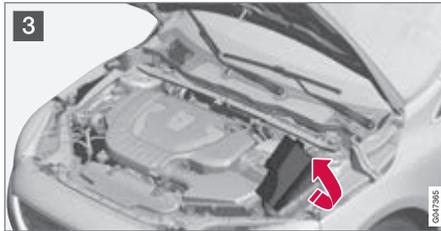

3 Fold the cover toward the engine to access the fuses.

### Refitting the covers

Reinstall the parts in reverse order.

### Positions

The label on the inside of the cover shows the positions of the fuses.

- Fuses 7-18 are of "JCASE" type and should be replaced by a workshop<sup>1</sup>.
- Fuses 19-45 and 47-48 are of "Mini Fuse" type.

	Function	A
7	ABS pump	40
8	ABS valves	30
9	Headlamp washers*	20
10	Ventilation fan	40
11	-	-
12	Primary fuse for fuses 32-36	30
13	-	-
14	Electric windscreen, right side*	40
15	-	-
16	Electric windscreen, left side*	40
17	Parking heater*	20
18	Windscreen wipers	20
19	Central electronic module, reference voltage, support battery	5
20	Horn	15

	Function	A
21	Brake light	5
22	-	-
23	Headlamp control	5
24	Internal relay coils	5
25	12 V socket, tunnel console front	15
26	Transmission control module	15
27	Solenoid clutch A/C (petrol, 4-cyl. diesel)	15
28	12 V socket, tunnel console rear	15
29	Climate sensor*; air intake throttle motors	10
30	Engine control module (5-cyl.)	5
31	Power seat, right*	20

<sup>1</sup> An authorised Volvo workshop is recommended.



## Fuses

	Function	A
32	Relay coil in cooling fan relay (4-cyl., 5-cyl. diesel); Lambda-sensors (4-cyl. petrol); Mass air flow meter (diesel), Bypass valve, EGR cooling (diesel); Regulator valve, fuel flow (5-cyl. diesel); Regulator valve, fuel pressure (5-cyl. diesel)	10
	Relay coil in cooling fan relay (5-cyl. petrol); Lambda-sensors (5-cyl. petrol)	20
33	Oil pump, automatic gearbox (5-cyl.); Mass air flow sensor (petrol); EVAP valve (4-cyl. petrol); Valves (5-cyl. petrol); Solenoids (5-cyl. petrol); Crankcase ventilation heater (5-cyl. petrol); Control motor, turbo (4-cyl. diesel); Regulator valve, fuel flow (4-cyl. diesel); Control module, radiator roller cover (4-cyl. diesel); Solenoid, piston cooling (5-cyl. diesel); Turbo control valve (5-cyl. diesel); Oil level sensor (5-cyl. diesel); Solenoid clutch A/C (5-cyl.)	10

	Function	A
34	Valves (4-cyl. petrol); Solenoids (4-cyl. petrol); Injectors (5-cyl. petrol); Lambda-sond (5-cyl. diesel); Crankcase ventilation heater (5-cyl. diesel)	10
35	Ignition coils (petrol)	10
	Diesel filter heater; Glow plug control module (5-cyl. diesel)	15
36	Engine control module (4-cyl.)	10
	Engine control module (5-cyl.); Throttle unit (5-cyl. petrol)	15
37	ABS	5
38	Engine control module; Transmission control module; Airbags	10
39	Light height control*	10
40	Electric control servo	5
41	Central electronic module	15
42	-	-
43	-	-
44	Collision warning system	5

	Function	A
45	Accelerator pedal sensor	5
46	Charging point, support battery	-
47	-	-
48	Coolant pump (when no parking heater is available)	10



## Fuses

## Under the glovebox



On the inside of the cover for the **fuse box in the engine compartment** there are tweezers that facilitate the procedure for the removal and fitting of fuses.

The **fuse box in the engine compartment** also provides space for several spare fuses.

## Replacing fuses

The fuses can be accessed when a protective cover has been removed from the fuse box.

## Cover removal



1. Take hold of the recess and pull until the locking lugs in the lower edge of the cover are released from the fuse box.
2. Remove the cover.


**NOTE**

A relatively large amount of tensile force is required to release the locking lugs at the top edge of the cover from the electrical distribution unit.



## Fuses

### Cover refitting

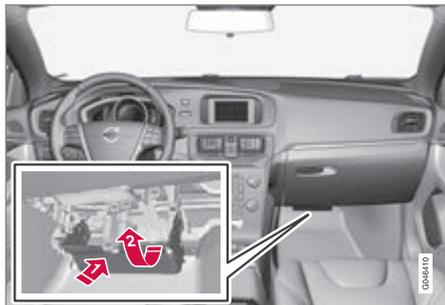

1. Guide in the lower lugs.
2. Turn the cover upwards until the upper lugs engage.

### NOTE

Make sure that the upper locking lugs are seated properly in the grooves of the electrical distribution unit.

### Positions

The label on the inside of the cover shows the positions of the fuses.

The fuses are of "Mini Fuse" type.

	Function	A
56	Fuel pump	20
57	-	-
58	Rear window wiper	15
59	Interior lighting, Roof console for front reading lamps and passenger compartment lighting	5
60	Interior lighting; Power seats	10
61	Blind, glass roof*	10
62	Rain sensor*; Dimming, interior rearview mirror*; Moisture sensor*	5
63	Collision warning system*	5
64	-	-
65	Unlocking, tailgate <sup>A</sup>	10
66	-	-
67	Reserve position 3, constant voltage	5
68	Steering lock	15

	Function	A
69	Combined instrument panel	5
70	Central locking system, fuel filler flap <sup>B</sup>	10
71	Climate panel	10
72	Steering wheel module	7.5
73	Siren alarm*; Data link connector OBDII	5
74	Main beam	15
75	-	-
76	Reversing lamp	10
77	Windscreen wipers <sup>C</sup> ; Rear windscreen wiper <sup>C</sup>	20
78	Immobiliser	5
79	Reserve position 1, constant voltage	15
80	Reserve position 2, constant voltage	20
81	Movement sensor alarm*; Remote receiver	5



## Fuses

	Function	A
82	Windscreen wipers <sup>D</sup> ; Rear windscreen wiper <sup>D</sup>	20
83	Central locking system, fuel filler flap <sup>E</sup>	10
84	Unlocking, tailgate <sup>F</sup>	10
85	Electric additional heater*; Button seat heating rear*	7.5
86	Airbags; Pedestrian airbag	10
87	Reserve position 4, constant voltage	7.5
88	-	-
89	-	-

A See also fuse 84.

B See also fuse 83.

C See also fuse 82.

D See also fuse 77.


E See also fuse 70.

F See also fuse 65.



## Fuses

### Below right front seat

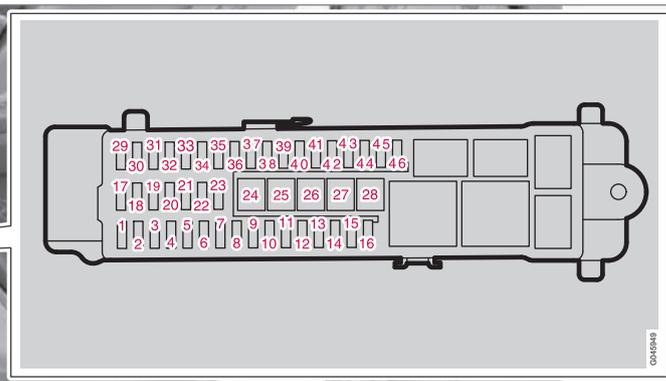

On the inside of the cover for the **fuse box in the engine compartment** there are tweezers that facilitate the procedure for the removal and fitting of fuses.

The **fuse box in the engine compartment** also provides space for several spare fuses.

#### Positions

The label on the inside of the cover shows the positions of the fuses.

- Fuses 24-28 are of "JCASE" type and should be replaced by a workshop<sup>2</sup>.
- Fuses 1-23 and 29-46 are of "Mini Fuse" type.

	Function	A
1	-	-
2	Keyless*	10
3	Door handle (Keyless*)	5
4	Control panel, left front door	25

	Function	A
5	Control panel, right front door	25
6	Control panel, left rear door	25
7	Control panel, right rear door	25
8	-	-
9	Power seat left*	20
10	-	-

<sup>2</sup> An authorised Volvo workshop is recommended.



## Fuses

	Function	A
11	Internal relay coil	5
12	Audio control unit (amplifier)*	5
13	-	-
14	Telematics*; Bluetooth*	5
15	Audio; Infotainment control unit	15
16	Digital radio*; TV*	10
17	12 V socket, cargo area	15
18	-	-
19	-	-
20	-	-
21	-	-
22	-	-
23	Trailer socket 2*	20
24	Primary fuse for fuses 12-16: Infotainment	40
25	-	-

	Function	A
26	Trailer socket 1*	40
27	Rear window defroster	30
28	-	-
29	BLIS*	5
30	Parking assistance*	5
31	Parking camera*	5
32	-	-
33	-	-
34	Seat heating (driver's side)	15
35	Seat heating (passenger side)	15
36	-	-
37	-	-
38	-	-
39	Seat heating, rear right*	15
40	Seat heating, rear left*	15
41	-	-

	Function	A
42	-	-
43	-	-
44	-	-
45	-	-
46	-	-

\* Option/accessory, for more information, see Introduction.



## Car care

### Washing the car

Wash the car as soon as it becomes dirty. Wash the car in a car wash with oil separator. Use car shampoo.

- Remove bird droppings from the paintwork as soon as possible. Bird droppings contain chemicals that affect and discolour paintwork very quickly. An authorised Volvo workshop is recommended for the removal of any discoloration.
- Hose down the underbody.
- Rinse the entire car until the dissolved dirt has been removed so as to reduce the risk of scratches from washing. Do not spray directly onto the locks.
- If necessary, use cold degreasing agent on very dirty surfaces. Note that in this case, the surfaces must not be hot from the sun!
- Wash using a sponge, car shampoo and plenty of lukewarm water.
- Clean the wiper blades with a lukewarm soap solution or car shampoo.
- Dry the car using a clean, soft chamois or a water scraper. If you avoid allowing drops of water to dry in strong sunlight, you reduce the risk of water drying stains which may need to be polished out.

### WARNING

Always have the engine cleaned by a workshop. There is a risk of fire if the engine is hot.

### IMPORTANT

Dirty headlamps have impaired functionality. Clean them regularly, when refuelling for example.

Do not use any corrosive cleaning agents but use water and a non-scratching sponge instead.

### NOTE

Outside lighting such as headlamps, fog lamps and rear lamps may temporarily have condensation on the inside of the lens. This is normal, all exterior lighting is designed to withstand this. Condensation is normally vented out of the lamp housing when the lamp has been switched on for a time.

### Cleaning the wiper blades

Asphalt, dust and salt residue on wiper blades, as well as insects, ice etc. on the windscreen, impair the service life of wiper blades.

For cleaning:

- Set the wiper blades in service position, see page 352.

### NOTE

Wash the wiper blades and windscreen regularly with lukewarm soap solution or car shampoo.

Do not use any strong solvents.

### Automatic car washes

An automatic car wash is a simple and quick way of washing the car, but it cannot reach everywhere. Handwashing the car is recommended for achieving optimum results.

### NOTE

The car must only be washed by hand over the first few months. This is because the paint is more delicate when it is new.

### High-pressure washing

When using high-pressure washing, use sweeping movements and make sure that the nozzle does not come closer than 30 cm to the surface of the car (the distance applies to all exterior parts). Do not spray directly onto the locks.



## Testing the brakes

### WARNING

Always test the brakes after washing the car, including the parking brake, to ensure that moisture and corrosion do not attack the brake linings and reduce braking performance.

Lightly depress the brake pedal now and then when driving long distances in rain or slush. The heat from the friction causes the brake linings to warm up and dry. Do the same thing after starting in very damp or cold weather.

### Exterior plastic, rubber and trim components

A special cleaning agent available from Volvo dealers is recommended for the cleaning and care of coloured plastic parts, rubber and trim components, such as glossy trim mouldings. When using such a cleaning agent the instructions must be followed carefully.

### IMPORTANT

Avoid waxing and polishing on plastic and rubber.

When using degreasant on plastic and rubber, only rub with light pressure if it is necessary. Use a soft washing sponge.

Polishing glossy trim mouldings could wear away or damage the glossy surface layer.

Polishing agent that contains abrasive must not be used.

### Rims

Only use rim cleaning agent recommended by Volvo.

Strong rim cleaning agents can damage the surface and cause stains on chrome-plated aluminium rims.

### Polishing and waxing

Polish and wax the car if the paintwork is dull or to give the paintwork extra protection.

The car does not need to be polished until it is at least one year old. However, the car can be waxed during this time. Do not polish or wax the car in direct sunlight.

Wash and dry the car thoroughly before you begin polishing or waxing. Clean off asphalt

and tar stains using tar remover or white spirit. More stubborn stains can be removed using fine rubbing paste designed for car paintwork.

Polish first with a polish and then wax with liquid or solid wax. Follow the instructions on the packaging carefully. Many preparations contain both polish and wax.

### IMPORTANT

Only paint treatment recommended by Volvo should be used. Other treatment such as preserving, sealing, protection, lustre sealing or similar could damage the paintwork. Paintwork damage caused by such treatments is not covered by Volvo warranty.

### Water-repellent coating\*



Never use products such as car wax, degreaser or similar on glass surfaces as this could ruin their water-repellent properties.

Take care when cleaning so as not to damage the glass surface.

To avoid damaging glass surfaces when removing ice – only use plastic ice scrapers.

There is natural wear of the water-repellent coating.

\* Option/accessory, for more information, see Introduction.



## Car care

Treatment with a special finishing agent available from Volvo dealers is recommended in order to maintain the water-repellent properties. This should be used first after three years and then each year.

### Rustproofing – inspection and maintenance

The car received a thorough and complete rustproofing at the factory. Parts of the body are made of galvanised sheet metal. The underbody is protected by a wear-resistant anti-corrosion compound. A thin, penetrating rustproofing fluid was sprayed into the exposed members, cavities, closed sections and side doors.

Under normal conditions the rustproofing does not require treatment for approximately 12 years. After this period, it should be treated at three-year intervals. Volvo recommends that you engage an authorised Volvo workshop for assistance if the car needs further treatment.

Dirt and road salt can lead to corrosion so it is important to keep the car clean. The car's rustproofing needs to be checked regularly and touched-up if necessary in order for it to be maintained.

### Cleaning the interior

Only use cleaning agents and car care products recommended by Volvo. Clean regularly and follow the instructions included with the car care product.

Vacuuming is important prior to using cleaning agents.

### Carpets and cargo area

Remove inlaid carpets for separate cleaning of the floor carpet and the inlaid carpets. Use a vacuum cleaner to remove dust and dirt.

Each inlay mat is secured with pins.

- Take hold of the inlay mat at each pin and lift the mat straight up.

Fit the inlay mat in place by pressing it in at each pin.

### WARNING

Before setting off check that the inlaid mat in the driver area is firmly affixed and secured in the pins in order to avoid getting caught adjacent to and under the pedals.

A special textile cleaner is recommended for stains on the floor mat after vacuuming. Floor mats should be cleaned with agents recommended by your Volvo dealer!

### Stains on fabric upholstery and roof upholstery

A special fabric cleaning agent, available from authorised Volvo dealers, is recommended to avoid impairing the fire retardant qualities of the upholstery.

### IMPORTANT

Sharp objects and Velcro may damage the fabric upholstery.

### Treating stains on leather upholstery

Volvo's leather upholstery is chromium-free and is treated to preserve its original appearance.

Leather upholstery ages and acquires a beautiful patina over time. The leather is refined and processed so that it retains its natural characteristics. It is given a protective coating, but regular cleaning is required in order to maintain both characteristics and appearance. Volvo offers a comprehensive product for the cleaning and treatment of leather upholstery which, when used in accordance with the instructions, preserves the leather's protective coating. After a period of use the natural appearance of the leather will nevertheless emerge, depending more or less on the surface texture of the leather. This is a



natural maturing of the leather and shows that it is a natural product.

To achieve best results Volvo recommends cleaning and the application of protective cream once to four times per year (or more if necessary). The Volvo Leather Care kit is available from your Volvo dealer.

### IMPORTANT

- Certain items of coloured clothing (for example, jeans and suede garments) may stain the upholstery.
- Never use strong solvents. Such products may damage fabric, vinyl and leather upholstery.

### Washing instructions for leather upholstery

1. Pour the leather cleaner on the dampened sponge and squeeze out a strong foam.
2. Work the dirt away with gentle circular movements.
3. Dab accurately with the sponge on the stains. Allow the sponge to absorb the stain. Do not rub.
4. Wipe off with soft paper or a cloth and allow the leather to dry completely.

### Protective treatment of leather upholstery

1. Pour a small amount of the protective cream on the felted cloth and massage in a thin layer of cream with gentle circular movements on the leather.
2. Allow the leather to dry for 20 minutes before use.

The leather has now been given improved protection against stains and improved UV protection.

### Washing instructions for the leather steering wheel

- Remove dirt and dust with a soft pre-moistened sponge and neutral soap.
- Leather needs to breathe. Never cover the leather steering wheel with protective plastic.
- Use natural oils. Volvo's leather care agents are recommended for best results.

### If the steering wheel has stains:

**Group 1** (ink, wine, coffee, milk, sweat and blood)

- Use a soft cloth or sponge. Mix a 5% ammonia solution. (For blood stains, use a solution of 2 dl water and 25g salt.)

**Group 2** (fats, oils, sauces and chocolate)

1. Same procedure as for group 1.
2. Polish with an absorbent paper or cloth.

**Group 3** (dry dirt, dust)

1. Use a soft brush to remove the dirt.
2. Same procedure as for group 1.

### Treating stains on interior plastic, metal and wood parts

A fibrillated fibre or microfibre cloth, lightly moistened with water, available from Volvo dealers, is recommended for cleaning interior parts and surfaces.

Do not scrape or rub stains. Never use strong stain removers. A special cleaning agent available from Volvo dealers can be used for more difficult cleaning.

### Cleaning seatbelts

Use water and a synthetic detergent. A special textile cleaning agent is available from your Volvo dealer. Make sure the seatbelt is dry before allowing it to retract.



## Car care


### Touching up minor paintwork damage

Paint is an important part of the car's rust-proofing and should therefore be checked regularly. To avoid the onset of rust, damaged paintwork should be rectified immediately. The most common types of paintwork damage are stone chips, scratches and marks on the edges of wings, doors and bumpers.

#### Materials

- primer<sup>1</sup> - a special adhesive primer in a spray can is available for e.g. plastic-coated bumpers
- basecoat and clearcoat - available in spray cans or as touch-up pens/sticks<sup>2</sup>
- masking tape
- fine sand paper<sup>1</sup>.


### Colour code

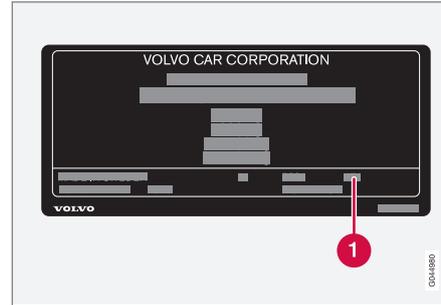

1 Car colour code

It is important that the correct colour is used. For product decal location, see page 376.

### Repair minor paintwork damage such as stone chips and scratches

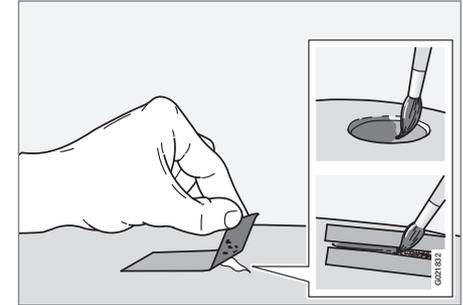

Before work is begun, the car must be clean and dry and at a temperature above 15 °C.

1. Apply a piece of masking tape over the damaged surface. Then remove the tape to remove any loose paint.

If the damage is down to the metal, use of a primer is appropriate. In the event of damage to a plastic surface, an adhesive primer should be used to give better results - spray into the lid of the spray can and brush on thinly.

<sup>1</sup> If required.

<sup>2</sup> Follow the instructions that are included with the package for the touch-up pen/stick.



2. Before painting, gentle polishing using a very fine polishing agent may be carried out locally if required (e.g. if there are any uneven edges). The surface is cleaned thoroughly and left to dry.
3. Stir the primer well and apply using a fine brush, a matchstick or similar. Finish off with a basecoat and clearcoat once the primer has dried.
4. For scratches, proceed as above, but mask around the damaged area to protect the undamaged paintwork.

**NOTE**


If the stone chip has not penetrated down to the metal and an undamaged layer of paint remains in place, fill in with basecoat and clearcoat as soon as the surface has been cleaned.

Type designations.....	376
Dimensions and weights.....	378
Engine specifications.....	382
Engine oil.....	383
Fluids and lubricants.....	385
Fuel.....	387
Wheel and tyres, dimensions and pressure .....	391
Electrical system.....	393
Type approval.....	394
Licenses.....	403
Symbols in the display.....	406



# 10

## SPECIFICATIONS

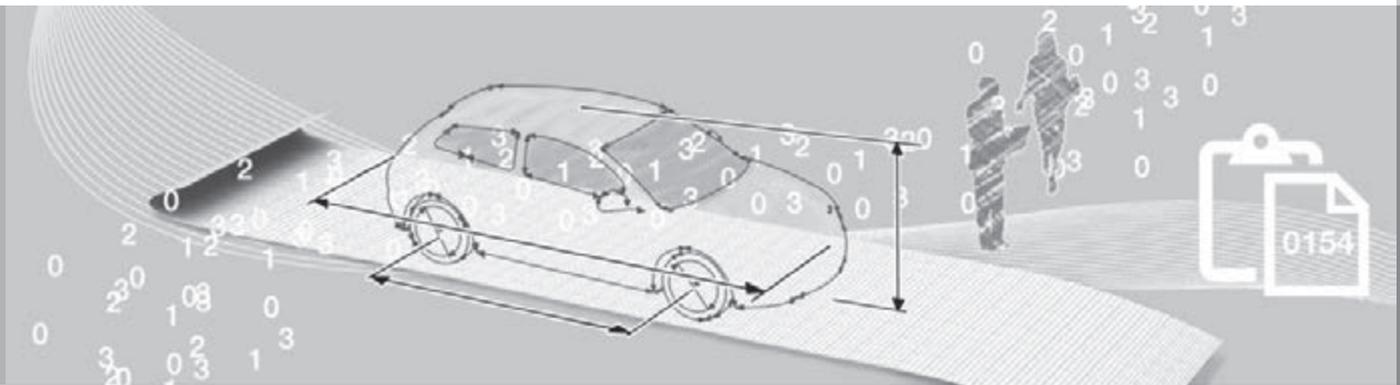



## Type designations

Knowing the car's type designation, vehicle identification and engine numbers can facilitate all contact with an authorised Volvo dealer regarding the car and when ordering spare parts and accessories.

- 1 Type designation, vehicle identification number, maximum permissible weights, codes for colour and upholstery and type approval number. The label is visible when the right rear door is opened.
- 2 Label for A/C system.
- 3 Label for parking heater.
- 4 Engine code and engine serial number.
- 5 Label for engine oil.
  - A Manual gearbox
  - B Automatic gearbox
- 7 Car's identification number. (VIN Vehicle Identification Number)


Further information on the car is presented in the registration document.

**i** NOTE

It is not intended that the decals illustrated in the owner's manual should be exact replicas of those in the car. They are included to show their approximate appearance and location in the car. The information that applies to your particular car is available on the respective decals for your car.

## Dimensions and weights

### Dimensions

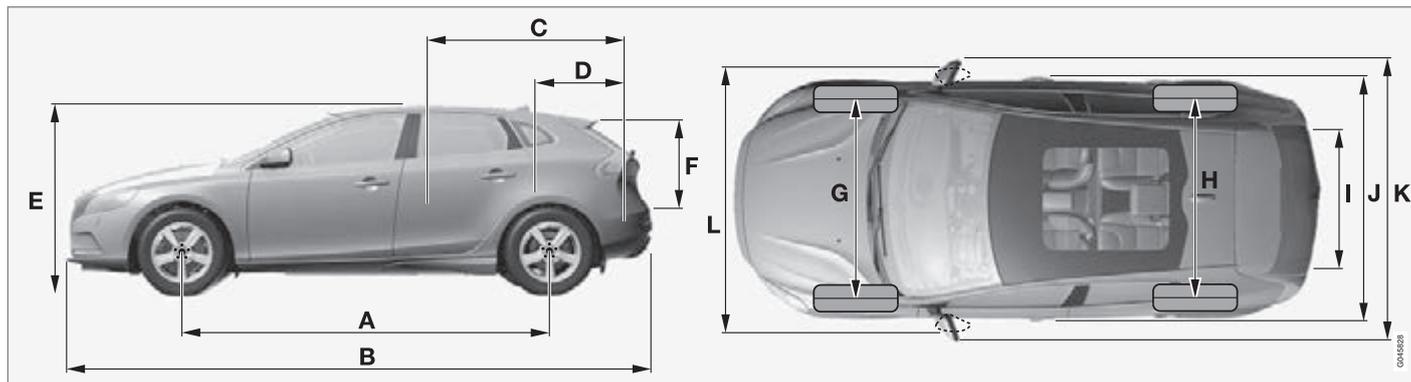

	Dimensions	mm
A	Wheelbase	2647
B	Length	4369
C	Load length, floor, folded rear seat	1508
D	Load length, floor	684
E	Height	1420
F	Load height	532

	Dimensions	mm
G	Front track	1546 <sup>A</sup> 1551 <sup>B</sup> 1559 <sup>C</sup>
H	Rear track	1533 <sup>A</sup> 1538 <sup>B</sup> 1546 <sup>C</sup>
I	Load width, floor	960

	Dimensions	mm
J	Width	1802
K	Width including door mirrors	2041
L	Width including folded-in door mirrors	1857

A Offset 52.5 mm.

B Offset 50 mm.

C Offset 46 mm.

0044523

## Dimensions and weights

**Weights**

Kerb weight includes the driver, the fuel tank 90% full and all fluids.

The weight of passengers and accessories, and towball load (when a trailer is hitched, see table page 380) influences the payload and is not included in the kerb weight.

Permitted max. load = Gross vehicle weight - Kerb weight.

**NOTE**


The documented kerb weight applies to cars in the standard version - i.e. a car without extra equipment or accessories. This means that for every accessory added the loading capacity of the car is reduced correspondingly by the weight of the accessory.

Examples of accessories that reduce loading capacity are the Kinetic/Momentum/Summum equipment levels, as well as other accessories such as Towbar, Load carrier, Space box, Audio system, Auxiliary lamps, GPS, Fuel-driven heater, Safety grille, Carpets, Luggage cover, Power seats, etc.

Weighing the car is a certain way of ascertaining the kerb weight of your own particular car.

**WARNING**

The car's driving characteristics change depending on how heavily it is loaded and how the load is distributed.

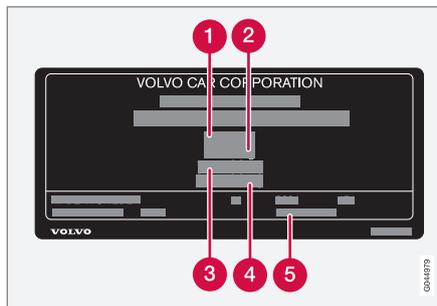

For information on decal location, see page 376.

- 1 Max. gross vehicle weight
- 2 Max. train weight (car+trailer)
- 3 Max. front axle load
- 4 Max. rear axle load
- 5 Equipment level

Max. load: See registration document.

Max. roof load: 75 kg.

## Dimensions and weights

### Towing capacity and towball load

Engine	Engine code <sup>A</sup>	Gearbox	Max. weight braked trailer (kg)	Max. towball load (kg)
T2	B4164T4	Manual, B6	1300	75
T3	B4164T3	Manual, B6	1300	75
T4	B4164T	Manual, B6	1300	75
T4	B4164T	Automatic, MPS6	1500	75
T4	B5204T8	Automatic, TF-80SD	1500	75
T5	B5204T9	Automatic, TF-80SD	1500	75
T5	B5254T12	Automatic, TF-80SD	1500	75
T5	B5254T14	Automatic, TF-80SD	1500	75
D2	D4162T	Manual, B6	1300	75
D2	D4162T	Automatic, MPS6	1300	75
D3	D5204T6	Manual, M66	1500	75
D3	D5204T6	Automatic, TF-80SD	1500	75
D4	D5204T4	Manual, M66	1500	75
D4	D5204T4	Automatic, TF-80SD	1500	75

<sup>A</sup> Engine code, component and serial number can be read on the engine, see page 376.

## Dimensions and weights

## Max. weight unbraked trailer (kg)

Engine	Engine code <sup>A</sup>	Gearbox	Max. weight unbraked trailer (kg)	Max. towball load (kg)
T2	B4164T4	Manual, B6	650	50
T3	B4164T3	Manual, B6	650	50
T4	B4164T	Manual, B6	650	50
T4	B4164T	Automatic, MPS6	700	50
T4	B5204T8	Automatic, TF-80SD	700	50
T5	B5204T9	Automatic, TF-80SD	700	50
T5	B5254T12	Automatic, TF-80SD	700	50
T5	B5254T14	Automatic, TF-80SD	700	50
D2	D4162T	Manual, B6	650	50
D2	D4162T	Automatic, MPS6	700	50
D3	D5204T6	Manual, M66	700	50
D3	D5204T6	Automatic, TF-80SD	750	50
D4	D5204T4	Manual, M66	700	50
D4	D5204T4	Automatic, TF-80SD	750	50

<sup>A</sup> Engine code, component and serial number can be read on the engine, see page 376.

## Engine specifications

## Engine specifications

 NOTE

Not all engines are available in all markets.

Engine	Engine code <sup>A</sup>	Output (kW/rpm)	Output (hp/rpm)	Torque (Nm/rpm)	No. of cylinders	Bore (mm)	Stroke (mm)	Swept volume (litres)	Compression ratio
T2	B4164T4	88/4500	120/4500	240/1600-3000	4	79	81.4	1.596	10.0:1
T3	B4164T3	110/5700	150/5700	240/1600-4000	4	79	81.4	1.596	10.0:1
T4	B4164T	132/5700	180/5700	240/1600-5000	4	79	81.4	1.596	10.0:1
T4	B5204T8	132/5000	180/5000	300/2700-4000	5	81.0	77	1.984	10.5:1
T5	B5204T9	157/6000	213/6000	300/2700-5000	5	81.0	77	1.984	10.5:1
T5	B5254T12	187/5400	254/5400	360/1800-4200	5	83	92,3	2,497	9.5:1
T5	B5254T14	183/5400	249/5400	360/1800-4200	5	83	92,3	2,497	9.5:1
D2	D4162T	84/3600	115/3600	270/1750-2500	4	75	88.3	1.560	16.0:1
D3	D5204T6	110/3500	150/3500	350/1500-2750	5	81.0	77	1.984	16.5:1
D4	D5204T4	130/3500	177/3500	400/1750-2750	5	81.0	77	1.984	16.5:1

<sup>A</sup> Engine code, component and serial number can be read on the engine, see page 376.

### Adverse driving conditions

Adverse driving conditions can lead to abnormally high oil temperature or oil consumption. Below are some examples of adverse driving conditions.

Check the oil level more frequently for long journeys:

- towing a caravan or trailer
- in mountainous regions
- at high speeds
- in temperatures colder than -30 °C or hotter than +40 °C

The above also apply to shorter driving distances at low temperatures.

Choose a fully synthetic engine oil for adverse driving conditions. It provides extra protection for the engine.

Volvo recommends Castrol oil products.



### IMPORTANT

In order to fulfil the requirements for the engine's service intervals all engines are filled with a specially adapted synthetic engine oil at the factory. The choice of oil has been made very carefully with regard to service life, starting characteristics, fuel consumption and environmental impact.

An approved engine oil must be used in order that the recommended service intervals can be applied. Only use a prescribed grade of oil for both filling and oil change, otherwise you will risk affecting service life, starting characteristics, fuel consumption and environmental impact.

Volvo Car Corporation disclaims all warranty liability if engine oil of the prescribed grade and viscosity is not used.

Volvo recommends that oil changes are carried out at an authorised Volvo workshop.

## Engine oil

### Engine oil grade

Engine	Engine code <sup>A</sup>	Recommended oil grade	Volume, incl. oil filter (litres)
T2	B4164T4	Certified and factory-filled oil: <b>Oil grade WSS-M2C925-A</b> options for service: <b>Oil grade: ACEA A5/B5</b> <b>Viscosity: SAE 5W-30</b>	approx. 4.1
T3	B4164T3		approx. 4.1
T4	B4164T		approx. 4.1
D2	D4162T	<b>Oil grade: ACEA A5/B5</b> <b>Viscosity: SAE 5W-30</b> For the low-emissions variant (max. tyre width 205) the recommendation for best fuel economy is ACEA A5/B5 SAE 0W-30. When driving under adverse conditions, use ACEA A5/B5 SAE 0W-30.	approx. 3.8
D3	D5204T6	<b>Oil grade: ACEA A5/B5</b> <b>Viscosity: SAE 0W-30</b>	approx. 5.9
D4	D5204T4		approx. 5.9
T4	B5204T8	<b>Oil grade: ACEA A5/B5</b> <b>Viscosity: SAE 0W-30</b>	approx 5.5
T5	B5204T9		approx 5.5
T5	B5254T12		approx 5.5
T5	B5254T14		approx 5.5

<sup>A</sup> Engine code, component and serial number can be read on the engine, see page 376.

For filling engine oil, see page 339.

## Fluids and lubricants

## Coolant

**Prescribed grade:** Coolant recommended by Volvo mixed with 50% water<sup>1</sup>, see the packaging.

Engine <sup>A</sup>		Volume (litres)
T2	B4164T4	7.0
T3	B4164T3	
T4	B4164T	

Engine <sup>A</sup>		Volume (litres)
D2	D4162T	10.0
D3	D5204T6	8.0
D4	D5204T4	

Engine <sup>A</sup>		Volume (litres)
T4	B5204T8	8.0
T5	B5204T9	
T5	B5254T12	
T5	B5254T14	

<sup>A</sup> Engine code, component and serial number can be read on the engine, see page 376.

## Other fluids and lubricants

Manual gearbox	Volume (litres)	Prescribed transmission fluid
B6	1.6	BOT 350M3
M66	1.9	

Automatic gearbox	Volume (litres)	Prescribed transmission fluid
TF-80SD	7.0	AW1
MPS6	7.3	BOT 341

<sup>1</sup> Water quality must fulfil the standard STD 1285.1.

## Fluids and lubricants

### NOTE

Under normal driving conditions, the gear-box oil does not need to be changed during its service life. However, it may be necessary under adverse driving conditions, see page 383.

Fluid	System	Volume (litres)	Prescribed grade
Brake fluid	Brake system	0.6	DOT 4
Washer fluid	Cars with headlamp washing	5.5	Washer fluid recommended by Volvo - with frost protection during cold weather and below freezing point.
	Cars without headlamp washing	3,2	
Fuel	4-cylinder petrol	approx. 62	Petrol:see page 301
	5-cylinder petrol		
	4-cylinder diesel	approx. 52	Diesel:see page 302
	5-cylinder diesel	approx. 60	
Compressor oil	Air conditioning	0,11	PAG oil
Coolant	Air conditioning	0,65 kg	R134a

### WARNING

The air conditioning system contains pressurised refrigerant R134a. This system must only be serviced and repaired by an authorised workshop.

## Fuel

CO<sub>2</sub> emissions and fuel consumption

							
		CO <sub>2</sub>		CO <sub>2</sub>		CO <sub>2</sub>	
T2 (B4164T4)	man	158	6.8	105	4.5	124	5.3
T3 (B4164T3)	man	158	6.8	105	4.5	124	5.3
T4 (B4164T)	man	164	7.0	109	4.7	129	5.5
T4 <sup>A</sup> (B4164T)	man	191	8.2	117	5.0	144	6.2
T4 (B4164T)	aut	184	7.9	120	5.1	143	6.1
T4 <sup>A</sup> (B4164T)	aut	192	8.3	125	5.4	149	6.4
T4 (B5204T8)	aut	243	10.4	135	5.8	174	7.5
T5 (B5204T9)	aut	243	10.4	135	5.8	174	7.5
T5 (B5254T12)	aut	263	11.3	140	6.0	185	7.9

# 10 Specifications

## Fuel

							
		CO <sub>2</sub>		CO <sub>2</sub>		CO <sub>2</sub>	
T5 <sup>A</sup> (B5254T12)	aut	268	11.5	144	6.2	189	8.1
D2 <sup>B</sup> (D4162T)	man	100	3.8	82	3,1	88	3.4
D2 <sup>C</sup> (D4162T)	man	107	4.1	90	3.4	96	3.7
D2 <sup>B</sup> (D4162T)	aut	115	4.4	95	3.6	102	3.9
D2 <sup>C</sup> (D4162T)	aut	116	4.4	99	3.8	105	4.0
D3 (D5204T6)	man	139	5.3	100	3.8	114	4.3
D3 <sup>A</sup> (D5204T6)	man	165	6.3	108	4.1	129	4.9
D3 (D5204T6)	aut	179	6.9	112	4.3	136	5.2
D3 <sup>A</sup> (D5204T6)	aut	179	6.8	122	4.6	143	5.4
D4 (D5204T4)	man	139	5.3	100	3.8	114	4.3

## Fuel

		CO <sub>2</sub>		CO <sub>2</sub>		CO <sub>2</sub>	
D4 <sup>A</sup> (D5204T4)	man	165	6.3	108	4.1	129	4.9
D4 (D5204T4)	aut	179	6.9	112	4.3	136	5.2
D4 <sup>A</sup> (D5204T4)	aut	179	6.8	122	4.6	143	5.4

A Only applies to cars equipped with 19-inch wheels.

B **Only** applies to the low-emission variant.

C Does **not** apply to the low-emission variant.

### Explanation

CO <sub>2</sub>	gram/km
	litre/100 km
	Urban driving

	Extra-urban driving
	Combined driving

**i NOTE**

If the consumption and emission data is missing then it is included in the enclosed supplement.

### Fuel consumption and emissions of carbon dioxide

Fuel consumption and emission values in the table above are based on specific EU cycles<sup>1</sup>, that apply to cars with kerb weight in the basic version and without extra equipment. The car's weight may increase depending on equipment. This, as well as how heavily the car is loaded, increases fuel consumption and carbon dioxide emissions.

<sup>1</sup> Official fuel consumption figures are based on two standardised driving cycles in a laboratory environment ("EU driving cycles") all in accordance with EU Directive 80/1268/EEC (Euro 4), EU Regulation no 692/2008, 715/2007 (Euro 5) and UN ECE Regulation no 101. The regulations cover the driving cycles for urban driving and extra-urban driving. - Urban driving - the measurement starts with cold starting the engine. The driving is simulated. - Extra-urban driving - the car is accelerated and braked at speeds between 0-120 km/h. The driving is simulated. - Cars with manual transmission are started in 2nd gear (applies to cars with up to 18-inch wheels). The value for combined driving, which is reported in the table, is a combination of urban driving and extra-urban driving, in accordance with legal requirements. CO<sub>2</sub> emissions - the exhaust gases are collected in order to calculate the carbon dioxide emissions during the two driving cycles. These are then analysed and give the value for CO<sub>2</sub> emissions.

## Fuel

There are several reasons for increased fuel consumption compared with the table's values. Examples of this are:

- The driver's driving style.
- If the customer has specified wheels larger than those fitted as standard on the model's basic version, then resistance increases.
- High speed results in increased wind resistance.
- Fuel quality, road and traffic conditions, weather and the condition of the car.

Even a combination of the above-mentioned examples can result in significantly improved consumption. For further information, please refer to the regulations referred to<sup>1</sup>.

Large deviations in fuel consumption may arise in a comparison with the EU driving cycles<sup>1</sup> which are used in the certification of the car and on which the consumption figures in the table are based.

### To bear in mind

Tips that the driver can use in order to reduce consumption:

- Drive gently and avoid unnecessary acceleration as well as braking too hard.
- Drive with the correct air pressure in the tyres and check this regularly - select ECO tyre pressure for best results, see the tyre pressure table on page 391.
- Choice of tyres can affect fuel consumption - seek advice on suitable tyres from a dealer.

See further information and more advice on pages 11 and 296.

See page 301 for general information on fuel.

<sup>1</sup> Official fuel consumption figures are based on two standardised driving cycles in a laboratory environment ("EU driving cycles") all in accordance with EU Directive 80/1268/EEC (Euro 4), EU Regulation no 692/2008, 715/2007 (Euro 5) and UN ECE Regulation no 101. The regulations cover the driving cycles for urban driving and extra-urban driving. - Urban driving - the measurement starts with cold starting the engine. The driving is simulated. - Extra-urban driving - the car is accelerated and braked at speeds between 0-120 km/h. The driving is simulated. - Cars with manual transmission are started in 2nd gear (applies to cars with up to 18-inch wheels). The value for combined driving, which is reported in the table, is a combination of urban driving and extra-urban driving, in accordance with legal requirements. CO<sub>2</sub> emissions - the exhaust gases are collected in order to calculate the carbon dioxide emissions during the two driving cycles. These are then analysed and give the value for CO<sub>2</sub> emissions.

## Wheel and tyres, dimensions and pressure

## Approved tyre pressures

Engine	Tyre size	Speed (km/h)	Load, 1 - 3 persons		Max. load		ECO pressure <sup>A</sup>
			Front (kPa) <sup>B</sup>	Rear (kPa)	Front (kPa)	Rear (kPa)	Front/rear (kPa)
T2 (B4164T4) T3 (B4164T3) T4 (B4164T) D2 (D4162T)	195/65 R15	0 - 160	230	230	260	260	260 (270 <sup>C</sup> , 280 <sup>D</sup> )
	205/55 R16	160 +	230	230	270	270	-
	205/50 R17						
	225/45 R17						
	225/40 R18						
235/35 R19							
T4 (B5204T8) T5 (B5204T9) T5 (B5254T12) T5 (B5254T14) D3 (D5204T6) D4 (D5204T4)	205/55 R16	0 - 160	230	230	260	260	260
	205/50 R17	160 +	290	240	310	270	-
	225/45 R17	0 - 160	240	240	260	260	260
	225/40 R18	160 +	290	240	310	280	-
	235/35 R19						
Temporary Spare Tyre		max. 80	420	420	420	420	-

<sup>A</sup> Economical driving.

<sup>B</sup> In certain countries there is the "bar" unit beside the SI unit "Pascal": 1 bar = 100 kPa.

<sup>C</sup> Only applies to 16" wheels for D2 automatic, low-emission variant.

<sup>D</sup> Only applies to 15" wheels for D2, low-emission variant.

## Wheel and tyres, dimensions and pressure



### NOTE

All engines, tyres or combinations of these are not always available in all markets.

## Electrical system

### Electrical system

The car has a voltage-regulated AC alternator. The electrical system is single-pole and uses the chassis and engine casing as a conductor.

The battery capacity is dependent upon the equipment level in the vehicle.

#### IMPORTANT

If the battery is replaced, take care to replace it with a battery with the same cold starting capacity and reserve capacity as the original battery (see the label on the battery).

10

### Battery

Engine	Voltage (V)	Cold start capacity, CCA - Cold Cranking Amperes (A)	Reserve capacity (minutes)
Petrol	12	520–800	100–160
Diesel	12	700–800	135–160
Petrol/Diesel with Start/Stop function	12	760 <sup>A</sup>	135

<sup>A</sup> Battery type AGM (Absorbed Glass Mat) must be used in cars with the Start/Stop function.

#### NOTE

- The battery's container size should be consistent with the original battery's dimensions.
- The battery's height is different depending on size.

#### Start/Stop\*

For information on batteries in cars with Start/Stop, see page 356.


## Type approval


### Remote control key system

#### Lock system, standard

Country	
EU, China	 <p>Continental FCC ID: KRB599K48284 IC:2017-09148284 CCAB06LP1840T4 GET8777C0308R TRCPLP0200022 CMI ID:2008DJ1121 Complies with IDA Standards D801782 TA-2008/469 RLY8T09-248 Made in Cz</p>

#### Keyless lock system (Keyless drive)

Country	
EU	 <p>Continental SWK 4 9265</p>
Korea	 <p>Continental SIE-SWK 49268 Made in Cz</p>

Country	
China	 <p>Continental SWK4 9289 CET8R831D0800R TRCPLP0200022 CMI ID:2008DJ1121 Complies with IDA Standards D801782 TA-2008/469 Made in Cz</p>
Hong Kong	 <p>Continental SWK4 9209</p>

### Radar system

Country	
Singapore	<div style="border: 1px solid black; padding: 5px; display: inline-block;">                     Complies with IDA standards DA105753                 </div>  IDA: Infocomm Development Authority of Singapore.
Brazil	 <p>ANATEC 1071 80 3683 ANATEC - INSTITUTO NACIONAL DE METROLOGIA, QUALIDADE E TECNOLOGIA</p>
Europe	<p><b>CE</b> Delphi Electronics &amp; Safety hereby declares that L2C0038TR and L2C0049TR are in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. This declaration of conformity may, if necessary, be consulted with Delphi Electronics &amp; Safety / One Corporate Center / Kokomo, Indiana 46904-9005 USA.</p>

**Type approval**

**Bluetooth®**

**Declaration of Conformity (Declaration of Conformity)**

Country	
Countries in the EU:	 <p>Exporting country: Japan            Manufacturer: Alpine Electronics Inc.            Type of equipment: <b>Bluetooth®</b> device            For further information visit <a href="http://ec.europa.eu/enterprise/rte/faq.htm">http://ec.europa.eu/enterprise/rte/faq.htm</a> #informing</p>

10

## Type approval

10

Country	
Czech Republic:	Alpine Electronics, Inc. tímto prohlašuje, že tento <b>Bluetooth®</b> Module je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.
Denmark:	Undertegnede Alpine Electronics, Inc. erklærer herved, at følgende udstyr <b>Bluetooth®</b> Module overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.
Germany:	Hiermit erklärt Alpine Electronics, Inc., dass sich das Gerät <b>Bluetooth®</b> Module in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.

0047265

## Type approval

Country	
Estonia:	Käesolevaga kinnitab Alpine Electronics, Inc. seadme <b>Bluetooth</b> ® Module vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.
UK	Hereby, Alpine Electronics, Inc., declares that this <b>Bluetooth</b> ® Module is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
Spain:	Por medio de la presente Alpine Electronics, Inc. declara que el <b>Bluetooth</b> ® Module cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.
Greece:	ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ Alpine Electronics, Inc. ΔΗΛΩΝΕΙ ΟΤΙ <b>Bluetooth</b> ® Module ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.
France:	Par la présente Alpine Electronics, Inc. déclare que l'appareil <b>Bluetooth</b> ® Module est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.
Italy:	Con la presente Alpine Electronics, Inc. dichiara che questo <b>Bluetooth</b> ® Module è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.
Latvia:	Ar šo Alpine Electronics, Inc. deklarē, ka <b>Bluetooth</b> ® Module atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.
Lithuania:	Šiuo Alpine Electronics, Inc. deklaruoja, kad šis <b>Bluetooth</b> ® Module atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.
Netherlands:	Hierbij verklaart Alpine Electronics, Inc. dat het toestel <b>Bluetooth</b> ® Module in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.
Malta:	Hawnhekk, Alpine Electronics, Inc., jiddikjara li dan <b>Bluetooth</b> ® Module jikkonforma mal-ħtiġijiet essenzjali u ma provvedimenti oħrajn rilevanti li hemm fid-Dirrettiva 1999/5/EC.
Hungary:	Alulírott, Alpine Electronics, Inc. nyilatkozom, hogy a <b>Bluetooth</b> ® Module megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.

## Type approval

Country	
Poland:	Niniejszym Alpine Electronics, Inc. oświadcza, że <b>Bluetooth</b> ® Module jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.
Portugal:	Alpine Electronics, Inc. declara que este <b>Bluetooth</b> ® Module está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.
Slovenia:	Alpine Electronics, Inc. izjavlja, da je ta <b>Bluetooth</b> ® Module v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.
Slovakia:	Alpine Electronics, Inc. týmto vyhlasuje, že <b>Bluetooth</b> ® Module spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.
Finland:	Alpine Electronics, Inc. vakuuttaa täten että <b>Bluetooth</b> ® Module tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.
Sweden:	Härmed intygar Alpine Electronics, Inc. att denna <b>Bluetooth</b> ® Module står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.
Iceland:	Alpine Electronics, Inc. hereby certifies that this <b>Bluetooth</b> ® Module conforms to the essential characteristic requirements and other relevant regulations of directive 1999/5/EC.
Norway:	Alpine Electronics, Inc. erklærer herved at utstyret <b>Bluetooth</b> ® Module er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EF.

Country	
China:	<p>第十三条 进口和生产厂商在其产品的说明书或使用手册中，应刊印下述有关内容：</p> <ol style="list-style-type: none"> <li>1. 标明附件中所规定的技术指标和使用范围，说明所有控制、调整及开关等使用方法； <ul style="list-style-type: none"> <li>■ 使用频率：2.4 - 2.4835 GHz</li> <li>■ 等效全向辐射功率(EIRP)：天线增益 &lt; 10dBi 时：≤100 mW 或 ≤20 dBm ①</li> <li>■ 最大功率谱密度：天线增益 &lt; 10dBi 时：≤20 dBm / MHz (EIRP) ①</li> <li>■ 载频容限：20 ppm</li> <li>■ 杂散发射(辐射)功率(对应载波±2.5倍信道带宽以外)： <ul style="list-style-type: none"> <li>• ≤-36 dBm / 100 kHz (30 - 1000 MHz)</li> <li>• ≤-33 dBm / 100 kHz (2.4 - 2.4835 GHz)</li> <li>• ≤-40 dBm / 1 MHz (3.4 - 3.53 GHz)</li> <li>• ≤-40 dBm / 1 MHz (5.725 - 5.85 GHz)</li> <li>• ≤-30 dBm / 1 MHz (其它 1 - 12.75 GHz)</li> </ul> </li> </ul> </li> <li>2. 不得擅自更改发射频率、加大发射功率(包括额外加装射频功率放大器)，不得擅自外接天线或改用其它发射天线；</li> <li>3. 使用时不得对各种合法的无线电电信业务产生有害干扰；一旦发现有干扰现象时，应立即停止使用，并采取措施消除干扰后方可继续使用；</li> <li>4. 使用微功率无线电设备，必须忍受各种无线电业务的干扰或工业、科学及医疗应用设备的辐射干扰；</li> <li>5. 不得在飞机和机场附近使用。</li> </ol>

## Type approval

Country	
Taiwan:	<p data-bbox="240 244 608 266">低效率電波輻射性電機管理辦法第十條</p> <p data-bbox="240 281 328 303">第十二條</p> <p data-bbox="240 318 1469 340">經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自 變更頻率、加大功率或變更原設計之特性及功能。</p> <p data-bbox="240 355 328 377">第十四條</p> <p data-bbox="240 392 1485 465">低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定 作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波 輻射性電機設備之干擾。</p> <div data-bbox="240 482 1002 624">The logo consists of a stylized graphic of four curved lines on the left, followed by the alphanumeric string "CCAB 11LP4080T3" in a bold, sans-serif font.</div> <div data-bbox="240 647 1002 789">The logo consists of a stylized graphic of four curved lines on the left, followed by the alphanumeric string "CCAB 11LP4070T0" in a bold, sans-serif font.</div>

**Country**

South  
Korea:

**제품 정보**

Volvo Car Korea

신청자 코드: KCC-CMM-N25-IAM21L3, KCC-CMM-N25-IAM21L2 and KCC-CMM-N25-IAM21L1

제품 명: Bluetooth Audio Navigation Radio

모델 명: IAM2.1

산 날짜: March/2010

Alpine Electronics, Inc

Made in Japan

**고객 정보**

Volvo Car Korea

볼보자동차코리아

서울시 용산구 한남 2 동 726-173 볼보빌딩 4 층

볼보자동차 고객센터 1588-1777

<http://www.volvocars.com/kr>

**사용자 주의사항**

※당해 무선설비는 전파혼신 가능성이 있으므로 인명안전과 관련된 서비스는 할 수 없습니다



## Type approval

Country			
The United Arab Emirates:	<table border="1" style="width: 100%;"> <tr> <td style="width: 50%; padding: 5px;"> <b>TRA REGISTERED</b> No: ER0071020/11  <b>DEALER</b> No: DA0042125/10                 </td> <td style="width: 50%; padding: 5px;"> <b>TRA REGISTERED</b> No: ER0071017/11  <b>DEALER</b> No: DA0042125/10                 </td> </tr> </table>	<b>TRA REGISTERED</b> No: ER0071020/11 <b>DEALER</b> No: DA0042125/10	<b>TRA REGISTERED</b> No: ER0071017/11 <b>DEALER</b> No: DA0042125/10
<b>TRA REGISTERED</b> No: ER0071020/11 <b>DEALER</b> No: DA0042125/10	<b>TRA REGISTERED</b> No: ER0071017/11 <b>DEALER</b> No: DA0042125/10		
South Africa:			
Jamaica:	Approved for use in Jamaica SMA EI: IAM2.1		
Thailand:	This telecommunication equipment conforms to NTC technical requirement.		
Oman	<table border="1" style="width: 100%;"> <tr> <td style="width: 50%; padding: 5px;"> <b>OMAN - TRA</b>                      R/0261/11                      D090258                 </td> <td style="width: 50%; padding: 5px;"> <b>OMAN - TRA</b>                      R/0262/11                      D090258                 </td> </tr> </table>	<b>OMAN - TRA</b> R/0261/11 D090258	<b>OMAN - TRA</b> R/0262/11 D090258
<b>OMAN - TRA</b> R/0261/11 D090258	<b>OMAN - TRA</b> R/0262/11 D090258		

## Sensus software

This software uses parts of sources from clib2 and Prex Embedded Real-time OS - Source (Copyright (c) 1982, 1986, 1991, 1993, 1994), and Quercus Robusta (Copyright (c) 1990, 1993), The Regents of the University of California. All or some portions are derived from material licensed to the University of California by American Telephone and Telegraph Co. or Unix System Laboratories, Inc. and are reproduced herein with the permission of UNIX System Laboratories, Inc. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. Neither the name of the <ORGANIZATION> nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES,

INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This software is based in part on the work of the Independent JPEG Group.

This software uses parts of sources from "libtess". The Original Code is: OpenGL Sample Implementation, Version 1.2.1, released January 26, 2000, developed by Silicon Graphics, Inc. The Original Code is Copyright (c) 1991-2000 Silicon Graphics, Inc. Copyright in any portions created by third parties is as indicated elsewhere herein. All Rights Reserved. Copyright (C) [1991-2000] Silicon Graphics, Inc. All Rights Reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice including the dates of first publication and either this permission notice or a reference to <http://oss.sgi.com/projects/FreeB/> shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL SILICON GRAPHICS, INC. BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE. Except as contained in this notice, the name of Silicon Graphics, Inc. shall not be used in advertising or otherwise

## Licenses

to promote the sale, use or other dealings in this Software without prior written authorization from Silicon Graphics, Inc.

This software is based in parts on the work of the FreeType Team.

This software uses parts of SSLeay Library: Copyright (C) 1995-1998 Eric Young (eay@cryptsoft.com). All rights reserved

### Combined Instrument Panel Software Open Source Software Notice

This product uses certain free / open source and other software originating from third parties, that is subject to the GNU General Public License version 2 and 3 (GPLv2/ GPLv3), GNU Lesser General Public License version 3 (LGPLv3), The FreeType Project License ("FreeType License") and other different and/or additional copyright licenses, disclaimers and notices. The links how to access the exact terms of GPLv2, GPLv3, LGPLv3, and the other open source software licenses, disclaimers, acknowledgements and notices are provided to you below. Please refer to the exact terms of the relevant License, regarding your rights under said licenses. Volvo Car Corporation (VCC) offers to provide the source code of said free/open source software to you for a charge covering the cost of performing such distribution, such

as the cost of media, shipping and handling, upon written request. Please contact your nearest Volvo Dealer.

This offer is valid for a period of at least three (3) years from the date of the distribution of this product by VCC / or for as long as VCC offers spare parts or customer support.

Portions of this product uses software copyrighted © v2.4.3/2010 The FreeTypeProject ([www.freetype.org](http://www.freetype.org)). All rights reserved.

### This product includes software under following licenses:

GPL v2 : <http://www.gnu.org/licenses/old-licenses/gpl-2.0.html>

- Linux kernel (merge between MontaVista 2.6.31 kernel and kernel from L2.6.31\_MX51\_ER\_1007 BSP)
- uBoot (based on v2009.08)
- busybox (based on version 1.13.2)

GCC runtime library exception: <http://www.gnu.org/licenses/gcc-exception.html>

- libgcc\_s.so.1

LGPL v3: <http://www.gnu.org/licenses/lgpl.html>

- Libc.so.6, libpthread.so.0, Librt.so.1

The FreeType Project License: <http://www.freetype.org/FTL.TXT>

- libfreetype.so.6 (version 2.4.3)

### DivX®



DivX Certified® to play DivX® video. DivX®, DivX Certified® and associated logos are registered trademarks of DivX, Inc. and are used under license. ABOUT DIVX VIDEO: DivX® is a digital video format created by DivX, Inc. This is an official DivX Certified device that plays DivX video. Visit [www.divx.com](http://www.divx.com) for more information and software tools to convert your files into DivX video.

ABOUT DIVX VIDEO-ON-DEMAND: This DivX Certified® device must be registered in order to play DivX Video-on-Demand (VOD) content. To generate the registration code, locate the DivX VOD section in the device

**Licenses**

setup menu. Go to <http://vod.divx.com> with this code to complete the registration process and learn more about DivX VOD. Covered by one or more of the following U.S. Patents: 7,295,673; 7,460,668; 7,515,710; 7,519,274.

## Symbols in the display

### General

There are a variety of different symbols in the display in the car. The symbols are divided into warning, indicator and information symbols. Shown below are the most common symbols with their meanings and a reference to where in the manual further information can be found. For more information on symbols and text messages, see pages 75 and 205.

 - Red warning symbol, illuminates when a fault has been indicated which could affect the safety and/or driveability of the car. An explanatory text is shown in the combined instrument panel at the same time.

 - Information symbol, illuminates in combination with text in the combined instrument panel, when a deviation in any of the car's systems has occurred. The yellow symbol information can also illuminate in combination with other symbols.

### Symbols in the display

#### Warning symbols in the combined instrument panel

Symbol	Meaning	Page
	Low oil pressure	77
	Parking brake applied	77,133
	Parking brake applied, alternative symbol	77
	Airbags - SRS	19,77
	Seatbelt reminder	16,77
	Alternator not charging	77
	Fault in the brake system	77,132
	Warning, safety mode	19, 29, 77, 123

#### Control symbols in the combined instrument panel

Symbol	Meaning	Page
	Fault in the ABL system*	75,93
	Emissions system	75
	Fault in the ABS system	75,132
	Rear fog lamp on	75,94
	Stability system, DSTC, Trailer stability assist*	75, 141, 314
	Stability system, sport mode	75,141
	Engine preheater (diesel)	75
	Low level in fuel tank	75,227
	Information, read display text	75
	Main beam on	75,92

## Symbols in the display

Symbol	Meaning	Page
	Left-hand direction indicators	75
	Right-hand direction indicators	75
	Start/Stop*, engine auto-stopped	75,125

### Information symbols in the combined instrument panel

Symbol	Meaning	Page
	Main beam with auto dimming - AHB*	92
	Camera sensor*	92
	Adaptive cruise control*	159
	Adaptive cruise control*	153, 154, 159
	Adaptive cruise control*, Distance Warning* (Distance Alert)	153,161

Symbol	Meaning	Page
	Adaptive cruise control*	152
	Adaptive cruise control*	152
	Cruise control*	148
	Speed limiter	146
	Radar sensor*	159, 163, 176
	Start/Stop*	128

Symbol	Meaning	Page
	Camera sensor*, Laser sensor*	168, 176, 181, 184
	Distance warning* (Distance Alert), City Safety™, Collision warning system*, Auto-brake*	163, 168, 176
	Engine and passenger compartment heater*	227
	Activated timer*	227
	Activated timer*	227
	ABL system*	93
	Low battery	227

\* Option/accessory, for more information, see Introduction.

## Symbols in the display

Symbol	Meaning	Page
	Park Assist Pilot - PAP*	193
	Rain sensor*	101
	Lane Keeping Aid*	184
	Driver Alert System*, Lane Keeping Aid*	181,184
	Driver Alert System*, Time for a break	179,181
	Gear indicator, manual gearbox	118
	Automatic gear positions	119

Symbol	Meaning	Page
	Registered speed information*	143
	Oil level measurement	341

### Information symbols in the roof console display

Symbol	Meaning	Page
	Seatbelt reminder	18
	Airbag, passenger seat, activated	23
	Airbag, passenger seat, deactivated	23



**A**

- ACC – Adaptive cruise control..... 150
- Active Bending Lights (ABL)..... 93
- Active Park Assist..... 193
- Active Xenon headlamps..... 93
- Adaptive cruise control..... 150  
     fault tracing..... 158  
     radar sensor..... 157
- Additional heater (Diesel)..... 230
- Adjusting headlamp pattern..... 97  
     halogen headlamp..... 98
- Adjusting the steering wheel..... 88
- Airbag  
     activating/deactivating, PACOS..... 22  
     driver's and front passenger side..... 20  
     key switch off..... 22
- AIRBAG ..... 20
- Airbag system ..... 19
- Air conditioning..... 222  
     general..... 215
- Air conditioning, AC..... 222
- Air conditioning system  
     repair..... 344
- Air distribution..... 216, 224
- Air quality system IAQS ..... 224
- Air vents..... 217
- Alarm..... 63  
     alarm indicator..... 63  
     alarm signals..... 64  
     arming..... 63  
     checking the alarm..... 47  
     deactivate..... 63  
     deactivating a triggered alarm..... 64  
     reduced alarm level..... 64
- Alcolock..... 111
- Allergy and asthma inducing substances. 216
- Approach light, duration..... 46, 97
- Audio  
     settings..... 253  
     surround..... 248, 253
- Audio system..... 248  
     functions..... 253  
     overview..... 248
- Audio volume ..... 249  
     phone..... 279  
     phone/media player..... 279  
     ring signal, phone..... 279  
     speed/noise compensation..... 253
- Auto  
     climate control settings..... 221
- Automatic car washes..... 368
- Automatic gearbox..... 119  
     manual gear positions (Geartronic)..... 120  
     towing and recovery..... 315  
     trailer..... 310
- Automatic locking..... 57
- Automatic relocking..... 56
- Auxiliary heater..... 230
- AUX input..... 248, 270

**B**

- Backrest..... 83  
     front seat, lowering..... 83
- Backrest rear seat, lowering..... 86
- Bag holder ..... 305
- Battery..... 355, 393  
     maintenance..... 355  
     remote control ..... 293  
     remote control key/PCC..... 50  
     start assistance..... 117  
     symbols on the battery..... 356  
     warning symbols..... 356
- Blind spot (BLIS)..... 199
- BLIS..... 198

- Bluetooth®
- handsfree ..... 276
  - media ..... 273
  - microphone off ..... 279
  - streaming audio ..... 273
  - transfer call to mobile ..... 279
- Bonnet, opening..... 338
- Brake and clutch fluid..... 343
- Brake light..... 94
- Brakes..... 131
- anti-lock braking system, ABS..... 131
  - brake light..... 94
  - brake system..... 131
  - Emergency Brake Assistance, EBA ... 131
  - emergency brake lights..... 94
  - filling brake fluid..... 343
  - handbrake..... 133
  - symbols in the combined instrument panel..... 132
- Bulbs, see Lighting..... 346
- [**
- Calls**
- incoming..... 278
  - operation..... 278
- Camera sensor..... 166, 175
- Car care..... 368
- Car care, leather upholstery..... 370
- Cargo area..... 304, 307
- cargo net..... 307
  - lighting..... 96
  - mounting points..... 305
  - parcel shelf..... 308
- Car upholstery..... 370
- Car wash..... 368
- Catalytic converter..... 301
- recovery..... 316
- CD ..... 266
- Centre console..... 207
- Checking and topping up the coolant..... 342
- Checking the engine oil level..... 339
- Children..... 32
- child safety locks..... 36
  - child seats and side airbags..... 24
  - location in the car..... 32
  - safety..... 32
- Child safety locks..... 62
- Child seat..... 32
- Child seats..... 32
- ISOFIX fixture system for child seats... 36
  - recommended..... 34
  - size classes for child seats with the ISOFIX fixture system..... 36
  - upper mounting points for child seats.. 40
- Cigarette lighter socket..... 242
- City Safety™..... 164
- Cleaning
- automatic car washes..... 368
  - car wash..... 368
  - rims..... 369
  - seatbelts..... 371
  - upholstery..... 370
- Clean Zone Interior Package (CZIP)..... 216
- Climate control..... 215
- general..... 215
  - sensors..... 215
- Clock, setting..... 79
- CO<sub>2</sub> emissions ..... 387
- Collision..... 29

Collision warning.....	170, 171
Collision warning system radar sensor.....	157, 165, 170
Collision Warning System with Auto Brake.....	170
Colour code, paint.....	372
Combined instrument panel.....	71, 204
messages.....	205
Comfort inside the passenger compart- ment.....	241
Compass.....	110
calibration.....	110
Condensation in headlamps.....	368
controls centre console .....	249
Controls centre console.....	207
Controls, lights.....	89
Control symbols.....	75
Cooling system.....	296
Corner Traction Control .....	140
Crash, see Collision.....	29
Cruise control.....	148
CZIP (Clear Zone Interior Package).....	216

**D**

DAB Radio.....	263
Daytime running lights.....	91
Deadlock deactivation.....	60
temporary deactivation.....	60
Deadlocks.....	60
Defroster.....	222
Diesel.....	302
Diesel particle filter.....	303
Dipstick, electronic.....	341
Direction indicators.....	95
Disengaging the gear selector inhibitor...	122
Display lighting.....	90
Distance Warning.....	161
Dolby Surround Pro Logic II.....	248
Door mirrors.....	106
Driver Alert Control.....	179
Driver Alert System.....	178
Driving.....	296
cooling system.....	296
with the tailgate open.....	297
with trailer.....	309

Driving in water.....	296
Driving with a trailer towball load.....	379
towing capacity.....	379
DSTC, see also Stability control system..	141
DVD .....	266

**E**

ECC, electronic climate control.....	218
EcoGuide.....	73
Economical driving.....	296
ECO pressure.....	328, 391
Electrical socket.....	244
cargo area.....	306
front seat.....	244
Emergency equipment warning triangle.....	329
Emergency puncture repair.....	330
Emissions of carbon dioxide.....	303
Engine overheating.....	309
starting.....	115

Engine block heater			
fuel-driven.....	226		
Engine compartment			
coolant.....	342		
oil.....	339		
overview.....	339		
Engine drag control .....	140		
Engine oil.....	339, 383		
adverse driving conditions.....	383		
capacities.....	383		
filter.....	339		
oil grade.....	383		
Engine specifications.....	382		
Environmental labelling, FSC, owner's manual.....	11		
Error messages			
Adaptive Cruise Control.....	159		
Driver Alert Control.....	181		
LKA.....	184		
see Messages and symbols.....	159		
Error messages in BLIS.....	201		
Error messages in Distance Alert.....	163		
ETC, electronic temperature control .....	219		
Expectant mothers, seatbelt.....	17		
External dimensions.....	378		
<b>F</b>			
Fan.....	220		
Fault tracing for the camera sensor.	166, 175		
First aid equipment.....	329		
First aid kit .....	329		
Fluids, capacities.....	385		
Fluids and oils.....	385		
Fog lamps			
rear.....	94		
Foot brake.....	131		
Front bulbs			
location.....	345		
Front seat			
head restraint.....	83		
FSC, environmental labelling.....	11		
Fuel.....	301		
fuel consumption.....	387		
fuel economy.....	328		
fuel filter.....	303		
Fuelling			
fuel filler flap.....	299		
fuel filler flap, locking.....	59		
Fuse box.....	359		
Fuses.....	359		
changing.....	359		
engine compartment.....	360		
general.....	359		
under front right seat.....	366		
under glovebox.....	363		
<b>G</b>			
Gearbox.....	118		
automatic.....	119		
manual.....	118		
Gear selector inhibitor.....	121		
Gear selector inhibitor, mechanical disengagement.....	122		
Geartronic.....	120		
Glass			
laminated/reinforced.....	104		
Glass roof, roller blind.....	108		
Global opening.....	215		
Glovebox.....	243		
locking.....	58		
Gross vehicle weight.....	379		
GSI - Gear selector assistance.....	118		

**H**

Handbrake.....	133
Hazard warning flashers.....	94
Headlamp levelling.....	90
Headlamp pattern, adjusting.....	97
Headlamp pattern adjustment	
Active Bending Lights .....	98
Headlamps.....	346
head restraint	
front seat.....	83
Head restraint	
centre seat, rear.....	85
lowering.....	86
Heating.....	221
rearview and door mirrors.....	107
rear window.....	107
seats.....	219
Heat-reflecting windscreen.....	104
High engine temperature.....	309
High-pressure headlamp washing.....	102
HomeLink® .....	134
Home safe lighting.....	97
Hoot.....	88

Horn.....	88
-----------	----

**I**

IAQS – Interior Air Quality System.....	216
IC – Inflatable Curtain.....	25
Ignition keys.....	81
Immobiliser.....	45
Indicator lamps, PCC.....	47
Inflatable curtain.....	25
Information button, PCC.....	47
Information display.....	71
Infotainment system .....	248
menu .....	251
overview .....	248
source buttons .....	249
voice control.....	285
Inlaid mats.....	243
Instrument lighting, see Lighting.....	90
Instrument overview	
left-hand drive.....	68
right-hand drive.....	70
Instruments and controls.....	68
Interior lighting, see Lighting.....	95

Interior rearview mirror.....	108
automatic dimming.....	108
Intermittent wiping.....	101
iPod®, connection.....	270

**J**

Journey statistics.....	238
-------------------------	-----

**K**

Kerb weight.....	379
Key.....	44
Key blade.....	48
Keyless drive.....	52, 115
Keyless start (keyless drive).....	52, 115
Keypad in the steering	
wheel.....	88, 148, 208, 249
Key positions.....	81

<b>L</b>	
Labels.....	376
Laminated glass.....	104
Lamps, see Lighting.....	345
Lane keeping assistant - LKA.....	182
Laser sensor.....	167
Leather upholstery, washing instructions	370
Lighting.....	345
Active Xenon headlamps.....	93
approach light, duration.....	46, 97
automatic lighting, passenger compartment.....	96
bulbs, specifications.....	350
controls.....	95
daytime running lights.....	91
display lighting.....	90
headlamp levelling.....	90
home safe lighting.....	97
in passenger compartment.....	95
instrument lighting.....	90
main/dipped beam.....	91
position/parking lamps.....	90
rear fog lamp.....	94
tunnel detection.....	91
Lighting, bulb replacement.....	346
daytime running lights.....	349
dipped beam (cars with halogen headlamps).....	347
direction indicators, front.....	348
main beam (cars with active xenon headlamps).....	347
main beam (cars with halogen headlamps).....	347
position/parking lamps, front.....	348
rear bulb holder: direction indicators, brake lamps and reversing lamps.....	349
rear fog lamps.....	350
side marker lamps, front.....	348
vanity mirror.....	350
Light switches.....	89
LKA - Lane keeping assistant.....	182
Loading	
cargo area.....	304
general.....	304
mounting points.....	305
roof load.....	304
Lock confirmation .....	44
Locking/unlocking	
inside.....	56
tailgate.....	58

Locks	
automatic locking.....	56
locking.....	56
unlocking.....	56
Lubricants.....	385
Lubricants, capacities.....	385

**M**

Main/dipped beam, see Lightning.....	91
Main beam, automatic activation.....	92
Maintenance	
rustproofing.....	370
Making calls.....	278
Manual gearbox.....	118
GSI - Gear selector assistance.....	118
towing and recovery.....	315
Manual gear positions (Geartronic).....	120
Max. roof load .....	379
Media, Bluetooth® .....	273
media player .....	266
Memory function in seats.....	84
Menu navigation, Infotainment .....	251
Menus/functions.....	209



register phone.....	277
voice control.....	285
Pocket park assist - PAP.....	193
Polishing.....	369
Position/parking lamps.....	90
Power guide.....	73
Power seat.....	84
Powershift gearbox.....	122, 315
Power windows.....	104

## Q

---

Queue Assist.....	155
Queue Assistant.....	155

## R

---

Radar sensor.....	150
limitations.....	157
Radio .....	259
AM/FM .....	259
DAB .....	263
Rain sensor.....	101

Rear bulbs	
location.....	349
Rearview and door mirrors	
compass.....	110
door.....	106
electrically retractable.....	107
heating.....	107
interior.....	108
Rear window, defrosting.....	107
Recirculation.....	223
Recommendations during driving.....	296
Recommended child seats, table.....	34
Recovery.....	317
Refrigerant.....	344
Refuelling.....	59, 299
fuel filler flap, manual opening.....	299
refuelling.....	299
Relay/fuse box, see Fuses.....	359
Remote control .....	292
battery replacement .....	293
Remote control, HomeLink®	
programmable .....	134
Remote control key.....	44
battery replacement.....	50
detachable key blade.....	48

functions.....	46
range.....	47

Remote control key system, type approval.....	394
Resetting, trip meter.....	234, 237, 238
Resetting the door mirrors.....	107
Resetting the power windows.....	106
Retractable power door mirrors.....	107
Reverse gear inhibitor.....	118
Rims	
cleaning.....	369
Road sign information.....	143
Roller blind for glass roof.....	108
Roof load, max. weight .....	379
Rustproofing.....	370

## S

---

Safety mode.....	29
Seat, see Seats.....	83
Seatbelt	
rear seat.....	18
seatbelt tensioner.....	18
Seatbelt reminder.....	18

Seatbelts.....	16	Start/Stop.....	125	<b>T</b>	
Seats.....	83	Start assistance.....	117	<hr/>	
head restraints, rear.....	85	Steering force, speed related.....	240	Tailgate	
heating.....	219	Steering force level, see Steering force...	240	locking/unlocking.....	58
lowering the front backrest.....	83	Steering lock.....	116	Temperature	
lowering the rear backrest.....	86	Steering wheel.....	88	actual temperature.....	215
power seats.....	84	keypad.....	88, 148, 208, 249	Temperature control.....	221
Securing loads (Loading).....	305	keypad, adaptive cruise control.....	152	Timer.....	223
Sensus.....	80	steering wheel adjustment.....	88	Total airing function.....	57, 215
Service position.....	352	Stone chips and scratches.....	372	Towbar	
Service programme.....	338	Storage spaces in the passenger com- partment.....	241	detachable, attachment .....	312
Set time interval.....	161	Surround.....	248, 253	detachable, removal .....	313
Side airbags.....	24	Symbols.....	141	Towbar, see Towing equipment.....	310
Signal input, external.....	248, 270	indicator symbols.....	75	Towing.....	315
SIPS bags.....	24	warning symbols.....	75	towing eye.....	316
Soot filter.....	303	Symbols and messages		Towing capacity.....	379
Soot filter full.....	303	Adaptive Cruise Control.....	159	Towing equipment.....	310
Spare wheel.....	324	Collision Warning with Auto		specifications.....	311
Speed limiter.....	146	Brake.....	168, 176	Towing eye.....	316
Spin control.....	140	Distance Alert.....	163	Trailer.....	309
Spin control function.....	140	Driver Alert Control.....	181	cable.....	309
Stability and traction control system.....	140	LKA.....	184	driving with a trailer.....	309
Stability system.....	140			snaking.....	314
Stains.....	370			Trailer stability assist .....	140
				Trailer Stability Assist.....	314

Transmission.....	118
Transponder.....	104
Trip computer.....	232
Trip meter.....	78
Trip meter, resetting.....	234, 237, 238
Troubleshooting	
Adaptive Cruise Control.....	158
TSA - trailer stability assist .....	140, 314
Tunnel detection.....	91
TV.....	289
Type approval, remote control key system.....	394
Type designation.....	376
Tyres	
direction of rotation.....	320
driving characteristics.....	320
maintenance.....	320
pressure.....	328, 391
puncture repair.....	330
specifications.....	322, 391
speed ratings.....	323
tread wear indicators.....	321
winter tyres.....	322

**U**

## Unlocking

from the inside.....	57
from the outside.....	56
USB, connection.....	270

**V**

Vanity mirror.....	96, 243
Ventilation.....	216
Vibration damper.....	310
Voice control, mobile phone.....	285
Volvo Sensus.....	80

**W**

## Warning lamp

adaptive cruise control.....	150
collision warning system.....	172
stability and traction control system..	140

## Warning lamps

airbags SRS.....	77
alternator not charging.....	77
fault in brake system.....	77

low oil pressure.....	77
parking brake applied.....	77
seatbelt reminder.....	77
warning.....	77

## Warning sound

collision warning system.....	172
-------------------------------	-----

## Warning symbol, airbag system.....

.....	19
-------	----

## Warning symbols.....

.....	75
-------	----

## Warning triangle.....

.....	329
-------	-----

## Washer fluid, filling.....

.....	353
-------	-----

## Washers

rear window.....	102
washer fluid, filling.....	353
windscreen.....	102

## Water and dirt-repellent coating.....

.....	104
-------	-----

## Water-repellent surface, cleaning.....

.....	369
-------	-----

## Waxing.....

.....	369
-------	-----

## Weights

kerb weight.....	379
------------------	-----

## Wheels

changing.....	324
installation.....	324
rims.....	321
snow chains.....	322
spare wheel.....	324

Wheels and tyres.....	320
Whiplash injury, WHIPS.....	26
WHIPS	
child seat/booster cushion.....	26
whiplash injury.....	26
Windows, rearview and door mirrors.....	104
Windscreen	
Heating.....	107, 222
Windscreen washing.....	102
Windscreen wipers.....	101
rain sensor.....	101
Winter driving.....	297
Winter tyres.....	322
Wiper blades.....	352
changing.....	352
cleaning.....	353
replacing, rear window.....	353
service position.....	352
Wipers and washing.....	101



